


<b>1.</b> Device Name	<b>SECURITEX LP</b>																																								
<b>2.</b> Description	Powdered Latex, Beaded Cuff, On-Line Chlorinated, Ambidextrous, Non Sterile, Single Use																																								
<b>3.</b> Product Codes & Sizes	<table border="1"> <thead> <tr> <th>Product Code</th> <th>Size</th> <th>Inner Barcode</th> <th>Shipper Barcode</th> </tr> </thead> <tbody> <tr> <td>41000</td> <td>SMALL</td> <td>9311059410001</td> <td>19311059410008</td> </tr> <tr> <td>41001</td> <td>MEDIUM</td> <td>9311059410018</td> <td>19311059410015</td> </tr> <tr> <td>41002</td> <td>LARGE</td> <td>9311059410025</td> <td>19311059410022</td> </tr> <tr> <td>41003</td> <td>XL</td> <td>9311059410032</td> <td>19311059410039</td> </tr> </tbody> </table>				Product Code	Size	Inner Barcode	Shipper Barcode	41000	SMALL	9311059410001	19311059410008	41001	MEDIUM	9311059410018	19311059410015	41002	LARGE	9311059410025	19311059410022	41003	XL	9311059410032	19311059410039																	
Product Code	Size	Inner Barcode	Shipper Barcode																																						
41000	SMALL	9311059410001	19311059410008																																						
41001	MEDIUM	9311059410018	19311059410015																																						
41002	LARGE	9311059410025	19311059410022																																						
41003	XL	9311059410032	19311059410039																																						
<b>4.</b> Recommended Applications	<ul style="list-style-type: none"> <li>Medical</li> <li>Medical Instrument Cleaning</li> <li>Hospitals</li> <li>Diagnostic</li> <li>Pharmaceutical</li> <li>Laboratory</li> <li>Dental</li> <li>Aged Care</li> <li>Child Care</li> <li>Correctional</li> <li>Forensic</li> <li>Food Service</li> <li>Food Processing</li> <li>Tattooists</li> <li>Emergency Services</li> <li>Cosmetic</li> <li>Veterinary</li> <li>Hair and Beauty</li> </ul>																																								
<b>5.</b> Materials	Natural Rubber Latex, Calcium Carbonate, Corn Starch, ZDBC, ZDEC, Zinc Oxide, Wingstay-L, Sulphur, Titanium Dioxide.																																								
<b>6.</b> Production Process	Former cleaning and washing, coagulant dipping, coagulant drying, latex dipping, latex drying oven, beading, leaching tank dip, main curing oven, cooling tank, wet powdering, drying oven, stripping, QC inspection, tumbling, packing, Pre-shipment inspection																																								
<b>7.</b> Standards & Approvals	<div style="display: flex; align-items: center;"> <div> <p><b>Securitex LP</b> is tested to and complies with;</p> <ul style="list-style-type: none"> <li>AS/NZS 4011.1:2014</li> <li>EN455-2</li> <li>Certified under HACCP Food Safety Accreditation</li> <li>Entered into the ARTG - ARTG# 124235</li> <li>Acceptable Quality Level AQL 1.5</li> </ul> </div> </div>																																								
<b>8.</b> Dimensions	<table border="1"> <thead> <tr> <th>SIZE</th> <th>WEIGHT p/pc +0.0/-0.2gm</th> <th>LENGTH (mm)</th> <th>THICKNESS FINGER SINGLE WALL +/-0.03</th> <th>THICKNESS PALM SINGLE WALL +/-0.03</th> <th>THICKNESS CUFF SINGLE WALL</th> <th>PALM WIDTH (+/-3)</th> </tr> </thead> <tbody> <tr> <td>SMALL</td> <td>5.6gm</td> <td>240mm</td> <td>0.12mm</td> <td>0.11mm</td> <td>0.08mm</td> <td>84mm</td> </tr> <tr> <td>MEDIUM</td> <td>6.0gm</td> <td>240mm</td> <td>0.12mm</td> <td>0.11mm</td> <td>0.08mm</td> <td>94mm</td> </tr> <tr> <td>LARGE</td> <td>6.5gm</td> <td>240mm</td> <td>0.12mm</td> <td>0.11mm</td> <td>0.08mm</td> <td>105mm</td> </tr> <tr> <td>XL</td> <td>7.1gm</td> <td>240mm</td> <td>0.12mm</td> <td>0.11mm</td> <td>0.08mm</td> <td>113mm</td> </tr> </tbody> </table>						SIZE	WEIGHT p/pc +0.0/-0.2gm	LENGTH (mm)	THICKNESS FINGER SINGLE WALL +/-0.03	THICKNESS PALM SINGLE WALL +/-0.03	THICKNESS CUFF SINGLE WALL	PALM WIDTH (+/-3)	SMALL	5.6gm	240mm	0.12mm	0.11mm	0.08mm	84mm	MEDIUM	6.0gm	240mm	0.12mm	0.11mm	0.08mm	94mm	LARGE	6.5gm	240mm	0.12mm	0.11mm	0.08mm	105mm	XL	7.1gm	240mm	0.12mm	0.11mm	0.08mm	113mm
SIZE	WEIGHT p/pc +0.0/-0.2gm	LENGTH (mm)	THICKNESS FINGER SINGLE WALL +/-0.03	THICKNESS PALM SINGLE WALL +/-0.03	THICKNESS CUFF SINGLE WALL	PALM WIDTH (+/-3)																																			
SMALL	5.6gm	240mm	0.12mm	0.11mm	0.08mm	84mm																																			
MEDIUM	6.0gm	240mm	0.12mm	0.11mm	0.08mm	94mm																																			
LARGE	6.5gm	240mm	0.12mm	0.11mm	0.08mm	105mm																																			
XL	7.1gm	240mm	0.12mm	0.11mm	0.08mm	113mm																																			
<b>9.</b> Physical Properties	<table border="1"> <thead> <tr> <th>DESCRIPTION</th> <th>BEFORE AGEING</th> <th>AFTER AGEING</th> </tr> </thead> <tbody> <tr> <td>Elongation at break (%)</td> <td>650 minimum</td> <td>500 minimum</td> </tr> <tr> <td>Tensile Strength (N)</td> <td>7 minimum</td> <td>6 minimum</td> </tr> </tbody> </table>						DESCRIPTION	BEFORE AGEING	AFTER AGEING	Elongation at break (%)	650 minimum	500 minimum	Tensile Strength (N)	7 minimum	6 minimum																										
DESCRIPTION	BEFORE AGEING	AFTER AGEING																																							
Elongation at break (%)	650 minimum	500 minimum																																							
Tensile Strength (N)	7 minimum	6 minimum																																							
<b>10.</b> Colour	Natural to White																																								

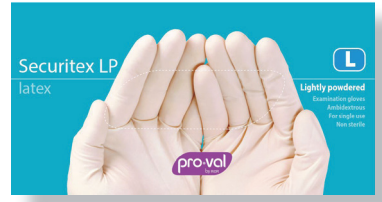

**Warning:** These gloves contain Natural Rubber Latex and may cause allergic reactions in some individuals.

**11. Performance Requirements**

Gloves shall be sampled and inspected in accordance with ISO 2859-1. The inspection levels and acceptable quality limits (AQLs) shall conform to those listed in below table for the characteristics listed.

CHARACTERISTICS	INSPECTION LEVEL	ACCEPTABLE QUALITY LEVEL	REFERENCE STANDARD
Dimensions	S2	4.0	AS/NZS4011.1:2014
Physical Properties	S2	4.0	AS/NZS4011.1:2014
Watertightness	G1	1.5	AS/NZS4011.1:2014
Tensile Strength and Elongation at break (before and after accelerated ageing)	S2	4.0	AS/NZS4011.1:2014
Visual Defects: Major Minor	G1	1.5 2.5	Manufacturers Practice
Packaging Defects Regulatory Visual Critical (Incl Glove Count)	G1 G1 S2	** 4.0 4.0	In House Inspection
Moisture Content	S2	4.0	Manufacturers Practice

Notes: \*\* indicates unacceptable at any level  
For Dimensions and Physical Properties a median of 13 test pieces used as per EN455-02-00

**12. Quality Control Inspection Procedures**

- Shipment is placed in quarantine area separately from other gloves in warehouse as one lot
- Shipment is then sorted by sizes if shipment consists of more than one size.
- QC inspector records lot number(s) indicated on inner boxes and outer cases, sizes quantity of shipment, buyer, date, etc
- QC inspector selects at random samples according to ISO procedures for sampling, each lots of different sizes are handled separately
- Samples are sent for testing as per requirements
- Results of tests will be recorded and only those that meet acceptance criteria are released for dispatch. If shipment consists of more than one size, shipment will be released only when all lots of different sizes have passed.
- If a shipment is found to fail test requirements it will be rejected by QC inspector and not released for shipment.

**13. Packaging**

100 pieces will be packed into a dispenser box. The number contained in each dispenser box determined by weight. 10 dispenser boxes are packed in 2 layers of 5 giving 10 dispenser boxes inside export quality shipper carton (outer).

**14. Shipper Carton Specifications**

SIZE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	GROSS WEIGHT (kg)
SMALL	390	245	257	6.6
MEDIUM	390	245	257	7.0
LARGE	390	245	257	7.5
XL	390	245	257	8.1

**15. Storage Conditions**

The gloves will maintain their properties when stored in dry conditions out of direct sunlight at between 10°C to 30°C.

**16. Shelf Life**

The gloves shall have a shelf life of 5 years from the date of manufacture when stored in compliance with the above storage conditions.