




LONDON

DIMMER MODULE / LED

INSTALLATION MANUAL US

(NDM-024061 / BP-VR250US)

COMPATIBLE WITH 3 WAY & INTERMEDIATE SWITCHES

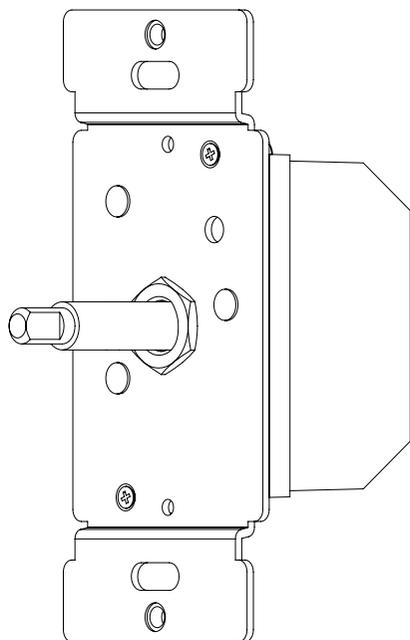

BUSTERANDPUNCH.COM / US
L0235

EN

IMPORTANT NOTES

PLEASE READ BEFORE INSTALLING.

1. THIS PRODUCT MUST BE INSTALLED BY A QUALIFIED PROFESSIONAL. INSTALL IN ACCORDANCE WITH ALL NATIONAL AND LOCAL ELECTRICAL CODES. TURN OFF THE POWER AT THE BREAKER PRIOR TO INSTALLING THIS PRODUCT.
2. THIS DIMMER IS NOT COMPATIBLE WITH INTERMEDIATE SWITCHES.
3. USE WIRES RATED FOR AT LEAST 75°C & USE COPPER WIRE ONLY.

CAUTION



EN

TO REDUCE THE RISK OF OVERHEATING AND POSSIBLE DAMAGE TO OTHER EQUIPMENT, DO NOT INSTALL TO CONTROL A RECEPTACLE, A MOTOR-OPERATED APPLIANCE, OR A TRANSFORMER-SUPPLIED APPLIANCE.

FR

GRADATEURS COMMANDANT UN BALLAST—AFIN DE REDUIRE LE RISQUE DE SURCHAUFFE ET LA POSSIBILITE D'ENDOMMAGEMENT A D'AUTRES MATERIELS, NE PAS INSTALLER POUR COMMANDER UNE PRISE, UN APPAREIL AMOTEUR OU UN APPAREIL ALIMENTE PAR UN TRANSFORMATEUR.



WARNING: ELECTRIC SHOCK HAZARD

Hazardous voltage may be present at the dimmer's output despite setting the dimmer to zero brightness level.

ELECTRICAL SPECIFICATIONS

PARAMETER	VALUE
Supply voltage & Frequency	100 - 120V AC 60HZ
Rating	3-250W: When used with dimmable LED lamps. 10-300W: When used with incandescent lamps, halogen lamps and Low Voltage Incandescent Ballasts
Dimming Technology	 Auto Detect Trailing edge dimming type. Leading / Trailing edge dimming mode can be manually set.
Compatible loads for TE Mode	 Dimmable LED lighting with compatible Electronic Transformers
	 LV Halogen Lighting with electronic transformers
Compatible loads for LE Mode	 Incandescent lighting, MV Halogen lamps
	 LV Halogen Lighting with Iron-core transformers
Operating Temperature	32° - 95° F
Operating Humidity	0-90% R.H.

THERMAL OVERLOAD PROTECTION:

This dimmer has a built-in thermal protected circuit. It will automatically switch off if the temperature rises above 131 °F / 55°C and reset when the dimmer cools down to 95 °F / 35°C. If the issue persists, please reduce the load on the dimmer.

SHORT CIRCUIT PROTECTION


Once activated, the dimmer will stop and reset after 5 seconds. If there is still a fault on the circuit, the dimmer will suspend operation until power is disconnected and switch on again. In this case, please contact a qualified professional.

NOTE :

Only Leading Edge mode (LE) is compatible when connecting with IRON-CORE transformers, DO NOT use in Trailing edge (TE) mode. Multiple compatible loads can be used if the total lamp wattage does not exceed the maximum load rating of the dimmer (250W). Some lamps may exhibit unexpected performance characteristics when cold. Dimming performance should improve after the lamp warms up. If the lamp appears unstable, try changing to TE or LE mode.

RECYCLING ELECTRICAL PRODUCTS:

Buster and Punch encourages all of its customers to make note of this symbol and avoid putting any waste electrical goods in your domestic waste bin or container. Please ensure you take your waste electrical goods to a suitable facility for disposal.

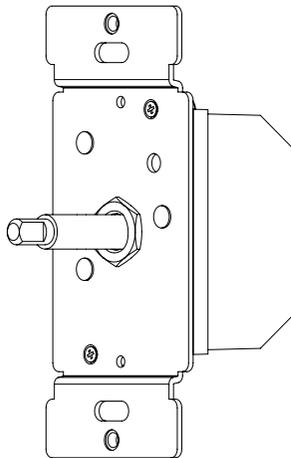

MINIMUM BRIGHTNESS LEVEL SETTING:

How to set the minimum brightness level :

FOLLOW OPERATING STEPS		ACTIONS
1		Remove front plate cover, turn ON the lamp, set to maximum brightness, then push button (A) once. Lamp will appear half brightness now ready to set minimum brightness
2		Turn central knob to set desired min brightness level, then push button (A) once. Lamp will appear at min brightness then return to normal brightness level to confirm save setting.
<p>You must perform each step within 15 seconds; if not, it will automatically exit the program without saving.</p>		

MODE SETTING

How to manually change the MODE SETTING (Factory default TE auto mode) :

FOLLOW OPERATING STEPS		ACTIONS
TE		Remove front plate cover, Turn ON the lamp at min. brightness then push and hold button (A) for 5 second until lamp will appear half-brightness and release button (A), lamp will flash 1 time to confirm and save setting.
LE		Remove front plate cover, Turn ON the lamp to max. brightness, then push and hold button (A) for 5 second until lamp will appear min-brightness and release button (A), Lamp will flash 3 times to confirm and save setting.
<p>You must perform each step within 15 seconds; if not, it will automatically exit the program without saving.</p>		

1 TURN OFF




BEFORE COMMENCING WORK, TURN OFF THE MAIN POWER SUPPLY OR SPECIFIC BREAKER FOR THE DIMMER OR SWITCH AT THE BREAKER BOX. IF YOU ARE NOT SURE WHICH BREAKER CONTROLS THE SWITCH YOU WANT TO REPLACE, THEN TURN OFF THE MAIN POWER SWITCH IN THE BREAKER BOX TO CUT OFF ALL THE POWER TO THE PROPERTY.




2 A 2-WAY WIRING:

HOW TO DIM THE DIMMER SWITCH:
Push to turn lights on / off. Turn knob clockwise to increase brightness. Turn knob anti-clockwise to decrease brightness.

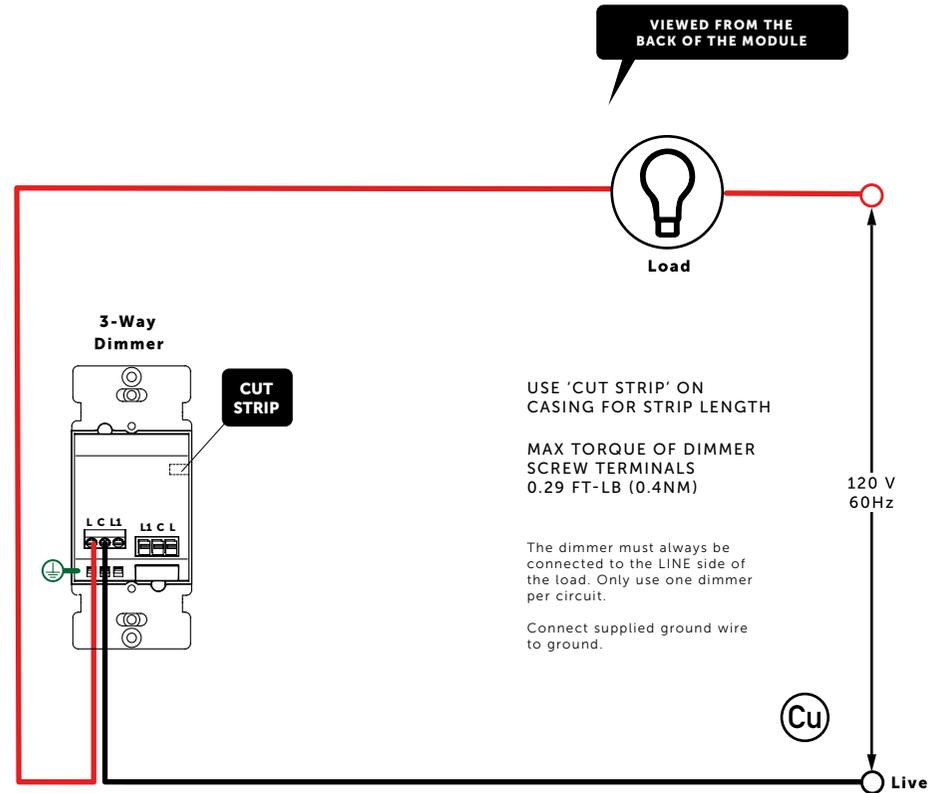


2 B 3-WAY WIRING
 HOW TO DIM IN ONE LOCATION, & ON & OFF IN ANOTHER :

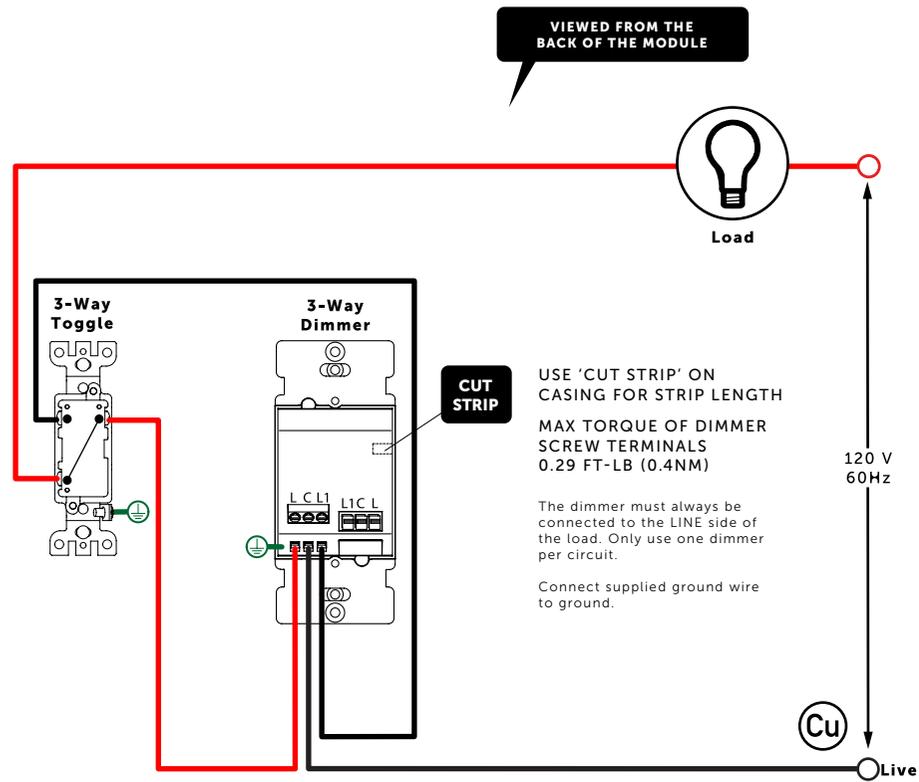


NOTE:
 For toggle wiring see relevant instruction manual.


3 MOUNT MODULE INTO WALL BOX / PLATE USING SCREWS(A) PROVIDED.

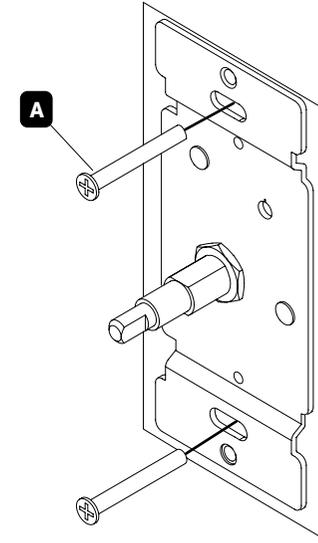

**4 PLACE INFILL PLATE (A) OVER THE DIMMER SHAFT
 PLACE COVER PLATE (B) OVER THE INFILL PLATE & TIGHTEN SCREWS (C) FINGER TIGHT.
 FYI: THIS PRODUCT HAS A 4 MM SHADOW GAP WHEN INSTALLED.**

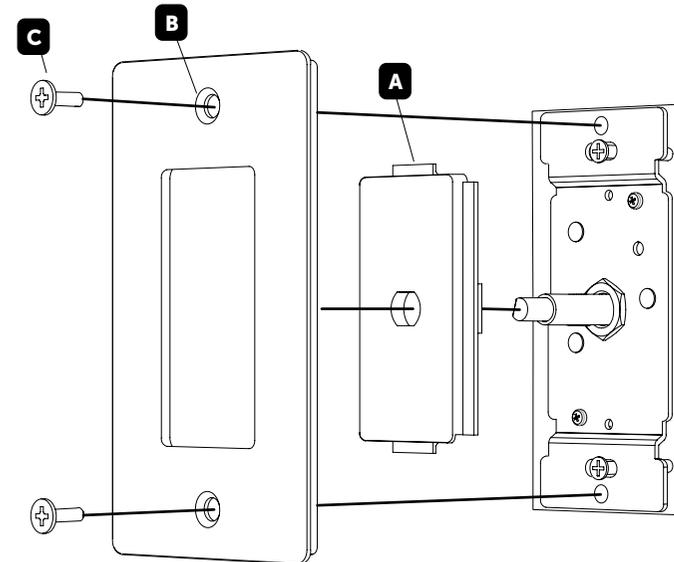


- 5** SCREW NUTS (A) (2 PARTS; PLASTIC THEN METAL NUT) IN PLACE, BY HAND FINGER TIGHT. ALIGN FLATS ON DIMMER KNOB (B) & DIMMER SHAFT, AND PRESS FIT BY HAND.

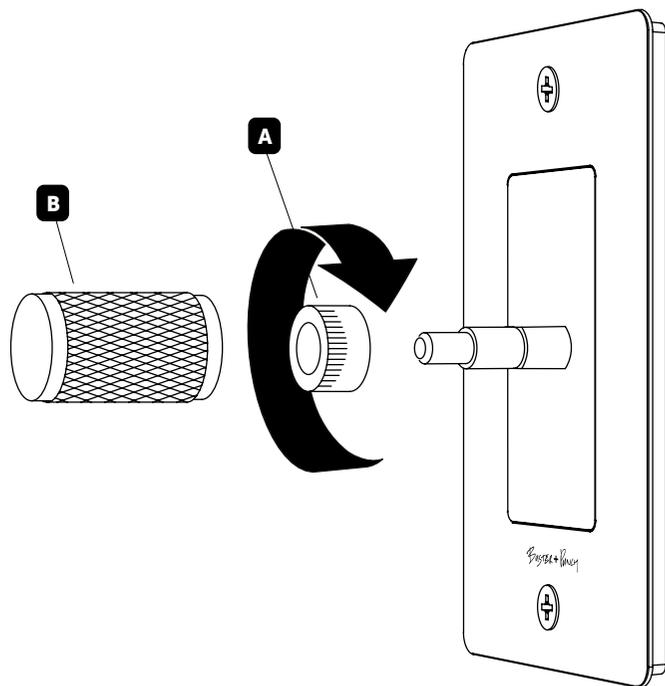

***NOTE:**
When tightening threaded parts be careful not to cross thread. We recommend pushing and rotating the part anticlockwise until you feel a click, then tighten clockwise finger tight.

- 6** FIT COIN CAPS (A) USING TOOL (B) PROVIDED, FINGER TIGHT, BE SURE NOT TO OVER-TIGHTEN

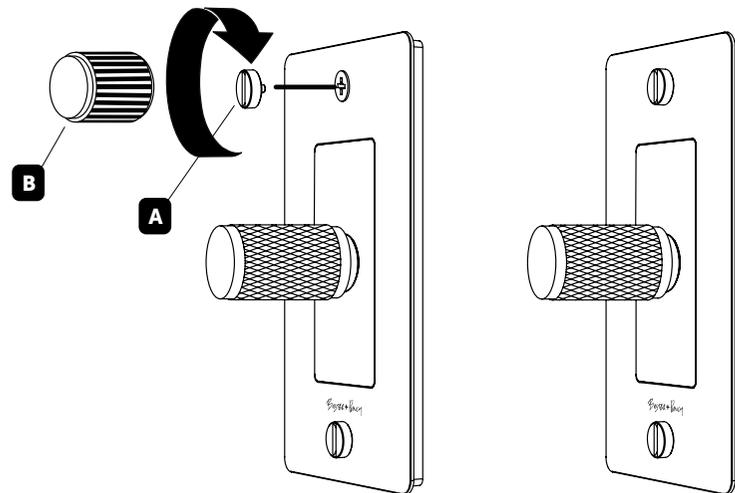

***NOTE:**
When tightening threaded parts be careful not to cross thread. We recommend pushing and rotating the part anticlockwise until you feel a click, then tighten clockwise finger tight.

- 7** TURN POWER BACK ON.



[end. **ORDINARY**]