


BUSTER+PUNCH

LONDON

XJY-USB-30-A-A/C

Dual USB Charger with Support USB PD, QC3.0
15A Duplex Tamper Resistant Receptacle

INSTRUCTION MANUAL

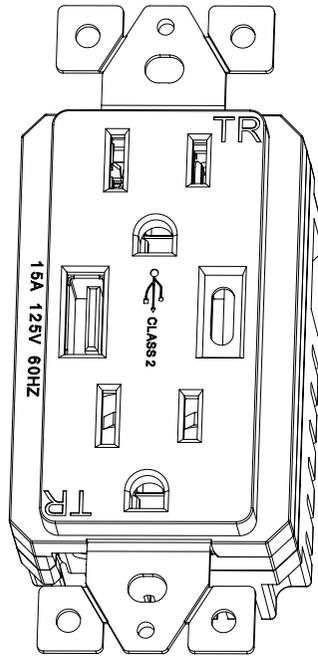

Recycling services for end-of-life electrical products should be offered by your local authority.
Recycling services for metal face plates may also be available in your locality.

BUSTERANDPUNCH.COM



FEATURES

- 1 USB type-A 5V 2.4A and 1 USB type-C 5V 3A, 9V 2A, 12V 1.5A.
- Charge most compatible electrical devices directly without an adapter.
- Replace a standard duplex receptacle.
- Back and side wire for easy installation.
- Listed ETL approved.

DESCRIPTION

The XJY-USB-30-A-A/C Charger/Tamper-Resistant Receptacle offers two USB charging ports and duplex Tamper-Resistant Receptacles. This XJY-USB-30-A-A/C is able to charge any current electronic devices simultaneously, including smart phones, tablets, e-readers, cameras and MP3 players.

What's more, it has the capability to charge new devices requiring a higher current rating in the future. All you will need is a USB cable to connect to one of the two USB ports.

INSTALLATION

WARNING: In order to avoid fire, electric shock or death, before altering the power supply of USB socket or fuse, please check if the main power switch is off.

ANNOUNCEMENT: Install and use it in accordance with appropriate electrical procedures and regulations.


If do not know or are unsure of the installation, please consult a qualified electrician.

1. For retrofit applications, remove wall plate and mounting screws.
2. Carefully remove the existing receptacle from the box.
3. Disconnect the wiring from the old receptacle.
4. Connect the XJY-USB-30-A-A/C per wiring diagram: black lead to hot wire, white lead to neutral wire, green lead to ground wire.
5. Tighten every screw and ensure no bare conductors are exposed, 9-12 pound inch (1.0-1.4N m) of torque.
6. Insert the XJY-USB-30-A-A/C into the wall box carefully, the charger requires a wall box of 3-3/4"x2-1/4"x3-3/16" Deep or 20.3 cu-in.
7. Mount XJY-USB-30-A-A/C in wall box with screws provided and mount wall plate.
8. Restore power at circuit breaker, installation is complete.

WARRANTY INFORMATION

Our company warranties this product to be free of defects in materials and workmanship for a period of one (1) year. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation. Our company warranties this product to be free of defects in materials and workmanship for a period of one (1) year. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.


WIRING DIAGRAM

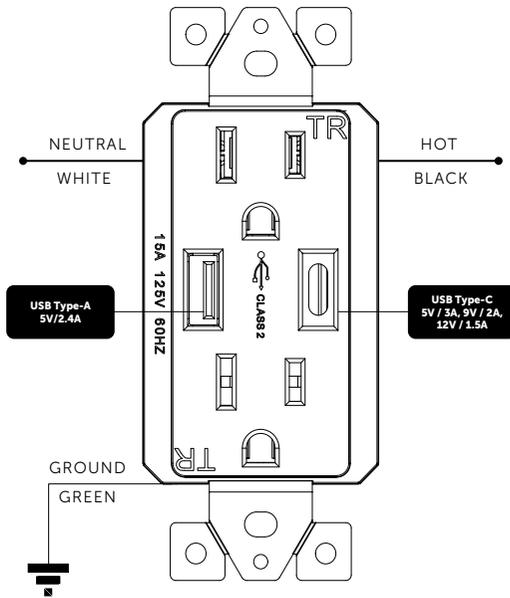

COMPATIBILITY

The XJY-USB-30-A-A/C Charger/Tamper-Resistant Receptacle is compatible with a wide range of electronic devices including, but not limited to the following:

- iPad
- iPad Mini
- Tablets
- Mobile Phones
- Blackberry, Android Phones
- Windows Phone by HTC
- Kindle, NOOK e-reader
- iPhone
- iPod
- GPS
- Galaxy Tab
- Bluetooth Headsets
- Digital Cameras
- Other USB compatible products

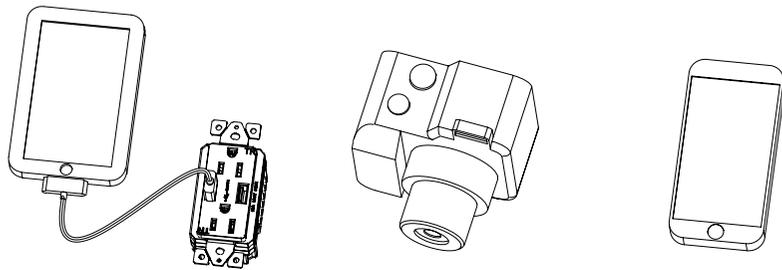

If the devices combined power requirements exceed the power capacity of the USB ports, the charger will automatically shut down to protect your devices.

[end. **ORDINARY**]