

### Safety Information

>All electrical work must be undertaken by a qualified contractor to ensure compliance with latest edition BS7671 and IEE/IET wiring regulations.


> Before installing an LED High Bay or doing any maintenance, ensure power supply is turned off at the circuit breaker or fuse box.

> This product is designed for permanent connection to fixed wiring; the circuit should be protected with the appropriate MCB or fuse.

### Environment

>Please DO NOT dispose of electrical items or packaging as unsorted waste. Use the recycling facilities provided by your local authorities.

### PRODUCT DIMENSIONS

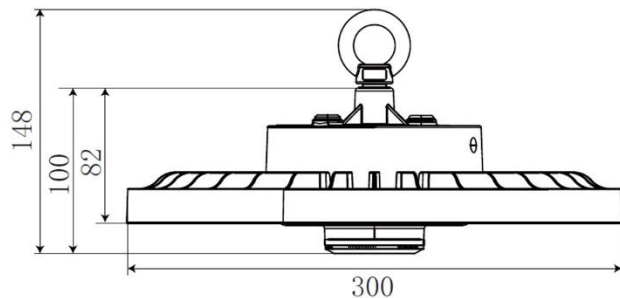

All units are in mm

### Important Warranty Information

The LED High Bay has a 3 year warranty, which can be extended free of charge to 5 years by registering online via the website address below. The registrant must provide the product part number and date of manufacture, which can be found on the label attached to the luminaire housing.



Certificate No. FS 590684



Certificate No. EMS 590685

NET LED Lighting  
Buckingham Business Park  
300 Anderson Road  
Cambridge  
CB24 4UQ  
sales@netled.co.uk  
www.netled.co.uk

Technical Helpline: 01223 851505  
Email: support@netled.co.uk

www.netled.co.uk/downloads

Distributed by



### ARBURY HIGH BAY INSTALLATION GUIDE

Part Number	Description
NET-53-20-02	100/150/200W Arbury High Bay Standard
NET-53-20-04	Arbury Microwave Motion Sensor
NET-53-20-06	Remote control for Arbury Motion Sensor




### SUPPLY/EARTH CLASS

100-270V AC 50/60 Hz



### Mains Input Termination

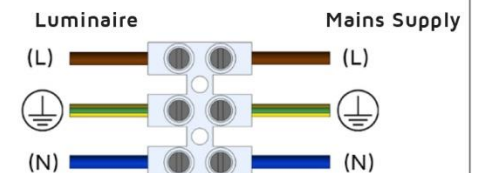


### 1-10V Dimming Terminal




**Installation procedure:** Carefully read the instructions and ensure the mains supply is isolated before installation. Please follow the safety information overleaf before carrying out any installation. Please retain this leaflet for future reference.


**High Bay Installation:**



**Step 1:** Carefully remove the High Bay light from the packaging. Take out the eye bolt from the packaging and screw in tight on top of the High Bay.

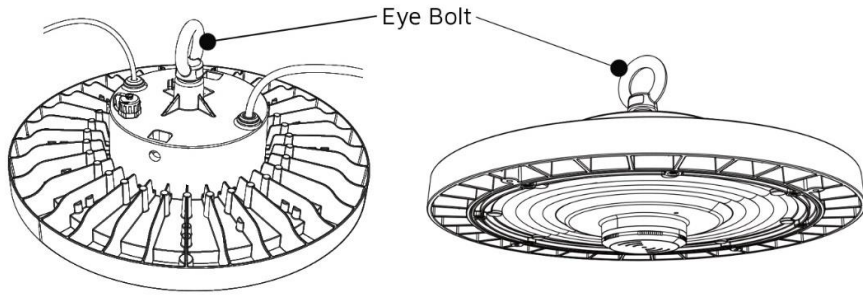

**Step 2:** Mount the High Bay light to the ceiling using a chain or a suitable suspension kit.

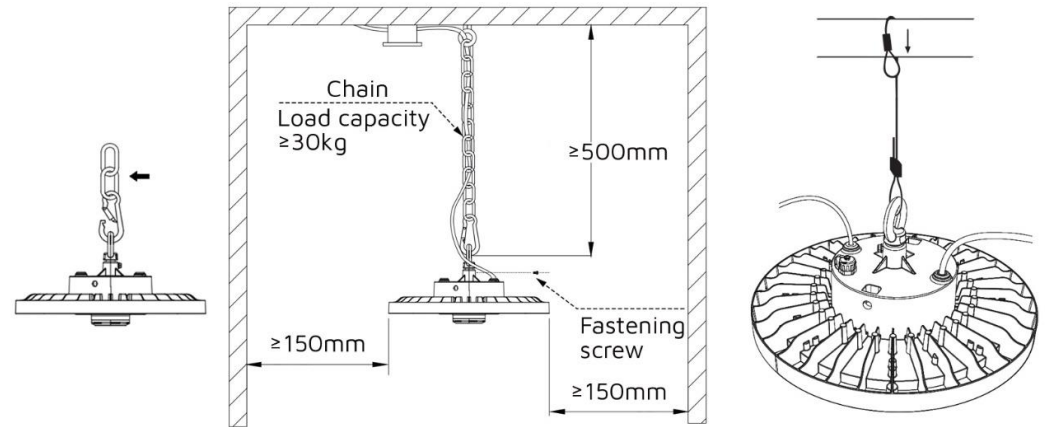


**Step 3:** To adjust the high bay wattage / colour temperature, remove the centre cover cap, then change the DIP switches according to the diagram below.



**Warning:** Ensure the luminaire is turned off before selecting wattage.



**DIP switch settings:**

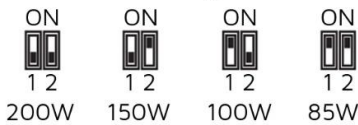

**CCT switch settings:**

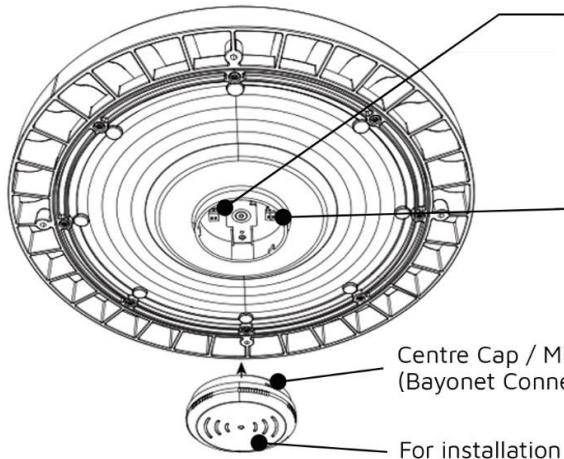


For installation height and induction range with microwave version, please refer to microwave instruction.

**Step 4:** Connect the cable to the mains as per the illustration below. Terminal block is not included. The luminaire must be connected to terminal block with an IP66 or above. For a dimming application, connect dimming +/- wires to Purple/Pink dimming wires on the rear of the product. Ensure wires are not touching the black high bay casing once installation is complete..


**1-10V Dimming Termination**



**Mains Input Termination**



Dimming connections Mains Input connections

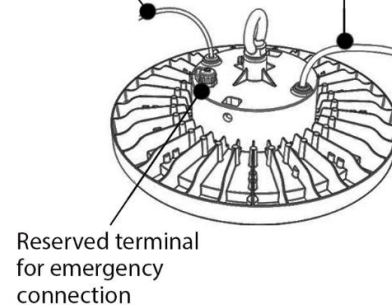

**Emergency Kit wiring diagram**

