

PRODUCT DATA SHEET

Pro-Val FNGA




Hand Protection with Enhanced Ventilation, Excellent Grip

Detail	Answer
Colour Coding	Black
Colour - Liner	Black
Coating Material	Nitrile
Shell Material	Nylon/Spandex
Gauge	13
Construction	Seamless Knitted

DIMENSIONS

Size Range	Size 6 (XS)	Size 7 (S)	Size 8 (M)	Size 9 (L)	Size 10 (XL)	Size 11 (XXL)
Total glove length (+/-5mm) A	220	230	240	250	260	270
Wrist length (mm) B	65	68	72	75	79	85
Wrist width (mm) C	70	72	75	78	84	86
Palm width (mm) D	85	90	97	100	105	110
Over Lock Colour	As Required	As Required	As Required	As Required	As Required	As Required

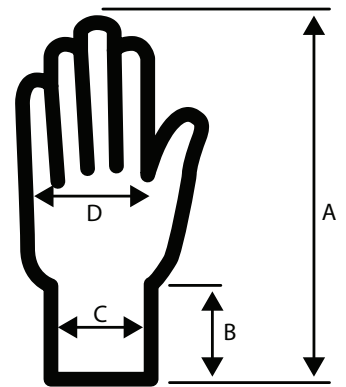

EN TEST RESULTS

TEST	Size 6 (XS)	Size 7 (S)
EN ISO 21420:2020	CTC	YES
EN 388: 2016	CTC	4131X

If a glove due to its design and construction fails outside the scope of EN 420 in terms of hand size dimensions then this glove is classified as "fit for special purpose".

TYPICAL PERFORMANCE VALUES

TYPICAL PERFORMANCE VALUES	
EN ISO 21420: 2020	LEVEL 5
pH - Textile ISO 3071:2020	6:9
EN 388:2016 + A1:2018 A. Abrasion Resistance	>8000 cycles
EN 388:2016 + A1:2018 D. Tear Resistance	>1.2 newtons
EN 388:2016 + A1:2018 D. Puncture Resistance	>50 newtons
EN 388:2016 + A1:2018 D. Cutting Resistance TDM	>20 newtons
REACH compliant	YES





PRODUCT DATA SHEET

Pro-Val FNGA



Hand Protection with Enhanced Ventilation, Excellent Grip

1. Device Name	FNGA																																		
2. Description	Knitted 13 gauge nylon glove, prestige nitrile coated palm, aero ventilation technology, knitted liner, knitted wrist cuff, silicone free, reusable, washable.																																		
3. Product Codes & Sizes	<table border="1"> <thead> <tr> <th>SIZE</th> <th>PRODUCT CODE</th> <th>BARCODE</th> <th>CUFF COLOUR</th> <th>GLOVE LENGTH</th> </tr> </thead> <tbody> <tr> <td>S</td> <td>41767</td> <td>29311059416670</td> <td>Yellow</td> <td>230mm</td> </tr> <tr> <td>M</td> <td>41768</td> <td>29311059416687</td> <td>Blue</td> <td>240mm</td> </tr> <tr> <td>L</td> <td>41769</td> <td>29311059416694</td> <td>White</td> <td>250mm</td> </tr> <tr> <td>XL</td> <td>41770</td> <td>29311059416700</td> <td>Green</td> <td>260mm</td> </tr> <tr> <td>2XL</td> <td>41771</td> <td>29311059416717</td> <td>Red</td> <td>270mm</td> </tr> </tbody> </table>					SIZE	PRODUCT CODE	BARCODE	CUFF COLOUR	GLOVE LENGTH	S	41767	29311059416670	Yellow	230mm	M	41768	29311059416687	Blue	240mm	L	41769	29311059416694	White	250mm	XL	41770	29311059416700	Green	260mm	2XL	41771	29311059416717	Red	270mm
SIZE	PRODUCT CODE	BARCODE	CUFF COLOUR	GLOVE LENGTH																															
S	41767	29311059416670	Yellow	230mm																															
M	41768	29311059416687	Blue	240mm																															
L	41769	29311059416694	White	250mm																															
XL	41770	29311059416700	Green	260mm																															
2XL	41771	29311059416717	Red	270mm																															
4. Recommended Application	<table border="1"> <tbody> <tr> <td>• Aerospace industry</td> <td>• Micro Electronics</td> <td>• Warehouse</td> </tr> <tr> <td>• Ceramic Industry</td> <td>• Engineering</td> <td>• Fabrication</td> </tr> <tr> <td>• Construction</td> <td>• Materials Handling</td> <td>• Quality Inspection</td> </tr> <tr> <td>• Forestry</td> <td>• Plastic Component Handling</td> <td>• Automotive Components</td> </tr> <tr> <td>• Transportation</td> <td>• General Assembly</td> <td>• Automotive Assembly</td> </tr> </tbody> </table>					• Aerospace industry	• Micro Electronics	• Warehouse	• Ceramic Industry	• Engineering	• Fabrication	• Construction	• Materials Handling	• Quality Inspection	• Forestry	• Plastic Component Handling	• Automotive Components	• Transportation	• General Assembly	• Automotive Assembly															
• Aerospace industry	• Micro Electronics	• Warehouse																																	
• Ceramic Industry	• Engineering	• Fabrication																																	
• Construction	• Materials Handling	• Quality Inspection																																	
• Forestry	• Plastic Component Handling	• Automotive Components																																	
• Transportation	• General Assembly	• Automotive Assembly																																	
5. Materials	Nylon, Nitrile																																		
6. Production Process	Yarn knitted to form glove shell, inspection, dipping for palm coating, wash, gloves turned inside out, over lock of wrist band in colour designated to size. Inspection for holes and imperfections, packing, dispatch.																																		
7. Standards & Approvals	<table border="1"> <tbody> <tr> <td>FNGA are tested to and complies with;</td> </tr> <tr> <td>Gloves are tested to and comply with EN420:2003 Clause 5 (size and dexterity)</td> </tr> <tr> <td>Gloves are tested to and comply with EN388 2016 Clause 5 protection against mechanical risks</td> </tr> </tbody> </table>		FNGA are tested to and complies with;	Gloves are tested to and comply with EN420:2003 Clause 5 (size and dexterity)	Gloves are tested to and comply with EN388 2016 Clause 5 protection against mechanical risks	 																													
FNGA are tested to and complies with;																																			
Gloves are tested to and comply with EN420:2003 Clause 5 (size and dexterity)																																			
Gloves are tested to and comply with EN388 2016 Clause 5 protection against mechanical risks																																			
8. Length	<table border="1"> <thead> <tr> <th>SIZE</th> <th>SMALL</th> <th>MEDIUM</th> <th>LARGE</th> <th>XL</th> <th>XXL</th> </tr> </thead> <tbody> <tr> <td>LENGTH (MIN)</td> <td>230</td> <td>240</td> <td>250</td> <td>260</td> <td>270</td> </tr> </tbody> </table>					SIZE	SMALL	MEDIUM	LARGE	XL	XXL	LENGTH (MIN)	230	240	250	260	270																		
SIZE	SMALL	MEDIUM	LARGE	XL	XXL																														
LENGTH (MIN)	230	240	250	260	270																														
9. Colour	Black with Coloured Size Band																																		
10. Performance Requirements	<table border="1"> <thead> <tr> <th>CHARACTERISTIC</th> <th>INSPECTION LEVEL</th> <th>MEDIUM</th> </tr> </thead> <tbody> <tr> <td>DEXTERITY</td> <td>5</td> <td>EN420:2003 Clause 5.1</td> </tr> <tr> <td>ABRASION RESISTANCE</td> <td>4</td> <td>EN388:2016</td> </tr> <tr> <td>BLADE CUT RESISTANCE</td> <td>1</td> <td>EN388:2016</td> </tr> <tr> <td>TEAR RESISTANCE</td> <td>3</td> <td>EN388:2016</td> </tr> <tr> <td>PUNCTURE RESISTANCE</td> <td>1</td> <td>EN388:2016</td> </tr> <tr> <td>EN ISO 21420:2020</td> <td>A</td> <td>EN388:2016</td> </tr> </tbody> </table>					CHARACTERISTIC	INSPECTION LEVEL	MEDIUM	DEXTERITY	5	EN420:2003 Clause 5.1	ABRASION RESISTANCE	4	EN388:2016	BLADE CUT RESISTANCE	1	EN388:2016	TEAR RESISTANCE	3	EN388:2016	PUNCTURE RESISTANCE	1	EN388:2016	EN ISO 21420:2020	A	EN388:2016									
CHARACTERISTIC	INSPECTION LEVEL	MEDIUM																																	
DEXTERITY	5	EN420:2003 Clause 5.1																																	
ABRASION RESISTANCE	4	EN388:2016																																	
BLADE CUT RESISTANCE	1	EN388:2016																																	
TEAR RESISTANCE	3	EN388:2016																																	
PUNCTURE RESISTANCE	1	EN388:2016																																	
EN ISO 21420:2020	A	EN388:2016																																	

Pro-Val FNGA



Hand Protection with Enhanced Ventilation, Excellent Grip

11. Packaging	10 Pairs packed into inner polybag with printed paper insert, 10 inner polybags are packed per shipper. For a total of 100 pieces per shipper carton.																														
12. Shipper Carton Specifications	<table border="1"> <thead> <tr> <th>SIZE</th> <th>LENGTH (mm)</th> <th>WIDTH (mm)</th> <th>HEIGHT (mm)</th> <th>GROSS WEIGHT (kg)</th> </tr> </thead> <tbody> <tr> <td>SMALL</td> <td>240</td> <td>460</td> <td>240</td> <td>4.2</td> </tr> <tr> <td>MEDIUM</td> <td>240</td> <td>460</td> <td>240</td> <td>4.2</td> </tr> <tr> <td>LARGE</td> <td>240</td> <td>460</td> <td>240</td> <td>4.3</td> </tr> <tr> <td>XL</td> <td>240</td> <td>460</td> <td>240</td> <td>4.7</td> </tr> <tr> <td>2XL</td> <td>240</td> <td>460</td> <td>240</td> <td>5.0</td> </tr> </tbody> </table>	SIZE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	GROSS WEIGHT (kg)	SMALL	240	460	240	4.2	MEDIUM	240	460	240	4.2	LARGE	240	460	240	4.3	XL	240	460	240	4.7	2XL	240	460	240	5.0
SIZE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	GROSS WEIGHT (kg)																											
SMALL	240	460	240	4.2																											
MEDIUM	240	460	240	4.2																											
LARGE	240	460	240	4.3																											
XL	240	460	240	4.7																											
2XL	240	460	240	5.0																											
13. Storage Conditions	The gloves will maintain their properties when stored in dry conditions out of direct sunlight at between 10 to 30°C																														
14. Shelf life	Not Specified																														
15. Washing Instructions	<ul style="list-style-type: none"> Do not use any bleaching or oxidising ingredients or any fabric softeners. Recommended washing temperature up to 30°C with mild detergents. Dry naturally, do not machine dry. Do not iron. There is no remarkable impact on cut resistance during normal life cycle of a glove. However, depending on staining and cleaning method, differences in shrinkage, weight loss, yarn strength, and colour may occur. In order to maximise the glove life cycle it is recommended that the mildest possible cleaning conditions in terms of temperature, chemicals and cycle duration be used. 																														

CE

Product Code

41768

Size

M

EN388

4X31A

FNGA

Comfortable to wear

with enhanced ventilation

Excellent grip in oily & wet conditions

Outstanding dexterity

APPLICATIONS

- Micro engineering/electronics
- Ceramics
- Small metal parts & plastics
- Construction
- Transportation
- Logistics & warehousing
- Farm & garden work

CARE INSTRUCTIONS

- Washing temperature up to 30° C
- Mild detergents
- Dry naturally, do not machine dry

MATERIAL

- Nylon liner
- Black nitrile palm coating

Made in PRC for
EHI Australia
ABN 61 098 176 991
www.ehi.com.au

9 311059 417680

ORDER NOW

NSW
Phone: 02 9670 0400

VIC
Phone: 03 9558 2020

WA
Phone: 08 9406 6333

www.ehi.com.au
indsales@ehi.com.au

POWERED BY
EHI
AUSTRALIA