

Safety Instructions

>All electrical work must be undertaken by a qualified contractor to ensure compliance with latest edition BS 7671 and IEE/IET wiring regulations.


>Before installing a LED Linear or doing any maintenance, ensure power supply is turned off at the circuit breaker or fuse box.

>This product is designed for permanent connection to fixed wiring; the circuit should be protected with the appropriate MCB or fuse.

Environment

>Please DO NOT dispose of electrical items or packaging as unsorted waste, use the recycling facilities provided by your local authorities.

PRODUCT DIMENSIONS

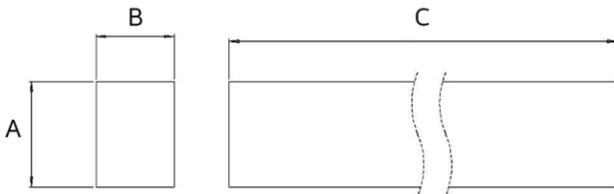

Size (ft)	A	B	C
4	75	56	1204

All units are in mm

Important Warranty Information

The LED Linear has a 3 year warranty, which can be extended free of charge to 5 years by registering online via the website address below. The registrant must provide the product part number and date of manufacture, which can be found on the label attached to the luminaire housing.



Certificate No. FS 590684



Certificate No. EMS 590685

NET LED Lighting
Buckway Business Park
300 Anderson Road
Cambridge
CB24 4UQ
sales@netled.co.uk
www.netled.co.uk

Technical Helpline: 01223 851505
Email: support@netled.co.uk


www.netled.co.uk/downloads

Distributed by



MARCH LINEAR INSTALLATION GUIDE

Part Number	Description
NET-43-11-30	Standard
NET-43-11-32	Emergency
NET-43-11-34	Self Test Emergency
NET-43-11-36	Dimmable
NET-43-11-38	Dimmable Emergency

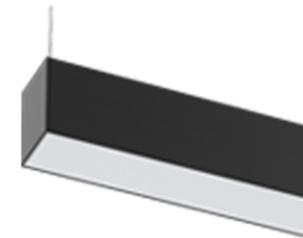


SUPPLY/EARTH CLASS

220-240V AC 50/60 Hz



Class I

Fig.1 Mains Input Termination

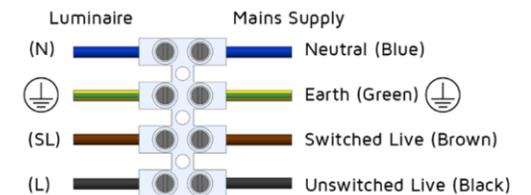

Installation procedure: Carefully read the installation instructions and ensure the mains supply is isolated before installation. Please read the safety information overleaf before carrying out any installation. Please retain the leaflet for future reference.

Installation Instructions





Non-replaceable light source



Replaceable control gear by professional


Recess mounting:

Step 1: Ensure all recess mounting kit components are included.

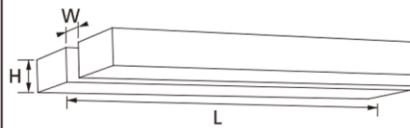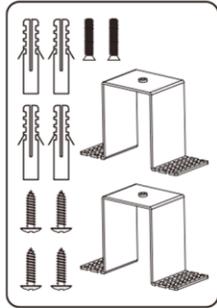


Spec	(L)Length	(W)Width	(H)Height
	1200mm	1208mm	65mm
			>80mm


Step 2: Remove Linear from packaging and ensure all components are included. Press the release clip on both sides to separate the securing bracket.

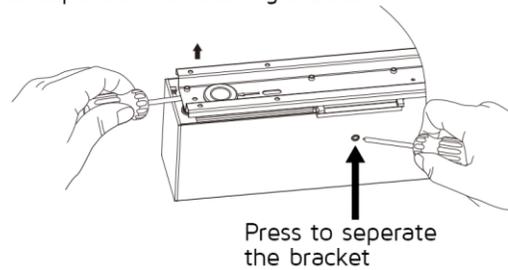

Step 3: Disconnect the LED connector and safety clips to release the Linear from the securing bracket.

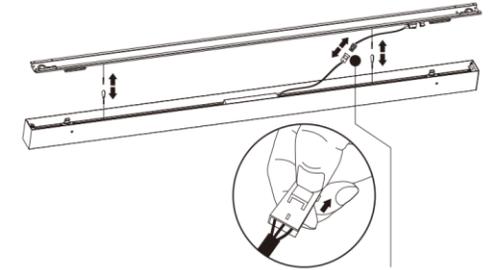


Step 4: Connect the power input cable in accordance to the below wiring diagram.

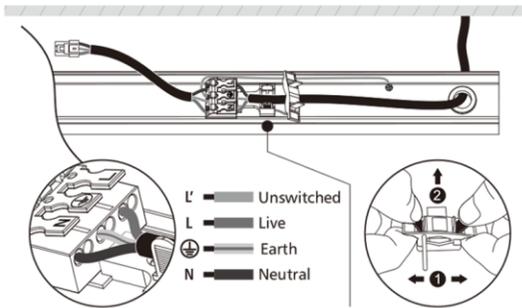


Standard	Emergency	DALI/Dim
L = Live ⊕ = Earth N = Neutral	L' = Unswitched L = Live ⊕ = Earth N = Neutral	DA/V+ = DIM+ DA/V- = DIM- L = Live ⊕ = Earth N = Neutral

Step 5: Attach the recess mounting brackets to the securing bracket with the fixing screws.

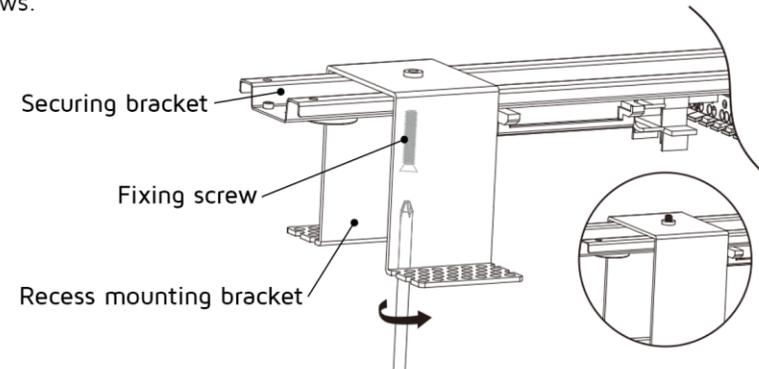


Step 6: Attach the recess mounting brackets to the ceiling tile with the fixing screws included.

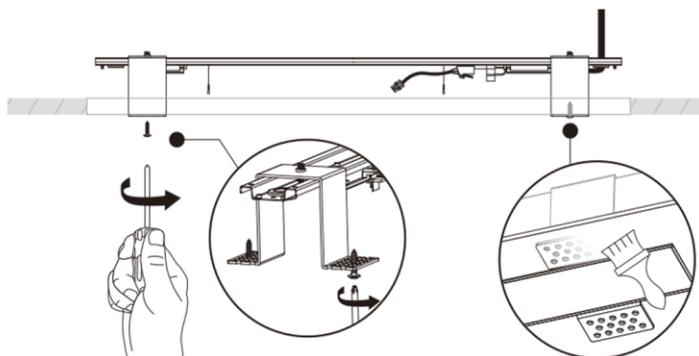

Paint the frame with the same color as the ceiling

Step 7: Re-attach the safety clips and the LED connector. Attach Linear to securing bracket. Listen for the 'click' from the release clips to ensure it has attached correctly.

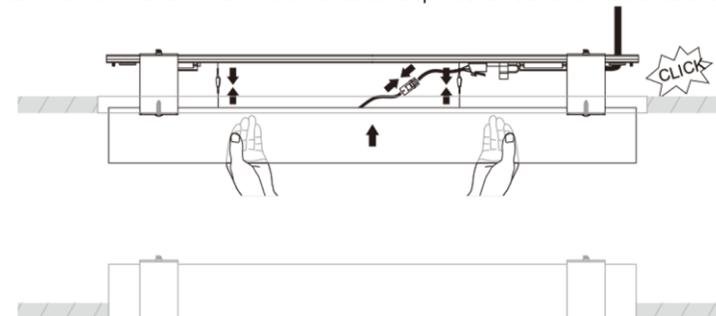

COMPLETE