

## Safety Instructions

>All electrical work must be undertaken by a qualified contractor to ensure compliance with latest edition BS 7671 and IEE/IET wiring regulations.


>Before installing a LED Linear or doing any maintenance, ensure power supply is turned off at the circuit breaker or fuse box.

>This product is designed for permanent connection to fixed wiring; the circuit should be protected with the appropriate MCB or fuse.

## Environment

>Please DO NOT dispose of electrical items or packaging as unsorted waste, use the recycling facilities provided by your local authorities.

## PRODUCT DIMENSIONS

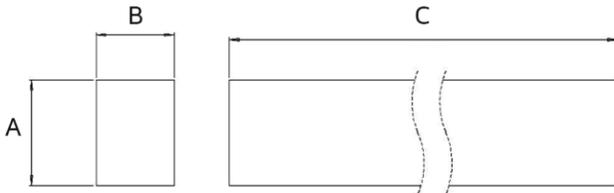

Size (ft)	A	B	C
4	75	56	1204

All units are in mm

## Important Warranty Information

The LED Linear has a 3 year warranty, which can be extended free of charge to 5 years by registering online via the website address below. The registrant must provide the product part number and date of manufacture, which can be found on the label attached to the luminaire housing.



Certificate No. FS 590684



Certificate No. EMS 590685

NET LED Lighting  
Buckway Business Park  
300 Anderson Road  
Cambridge  
CB24 4UQ  
sales@netled.co.uk  
www.netled.co.uk

Technical Helpline: 01223 851505  
Email: support@netled.co.uk


www.netled.co.uk/downloads

Distributed by



## MARCH LINEAR INSTALLATION GUIDE

Part Number	Description
NET-43-11-30	Standard
NET-43-11-32	Emergency
NET-43-11-34	Self Test Emergency
NET-43-11-36	Dimmable
NET-43-11-38	Dimmable Emergency

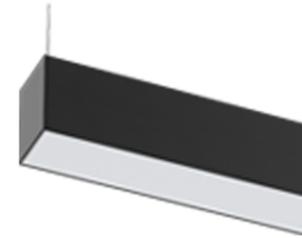


## SUPPLY/EARTH CLASS

220-240V AC 50/60 Hz



Class I

Fig.1 Mains Input Termination

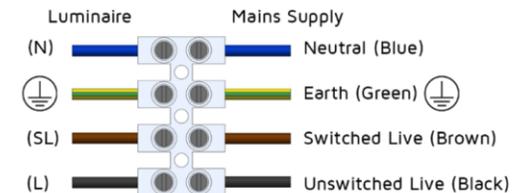

**Installation procedure:** Carefully read the installation instructions and ensure the mains supply is isolated before installation. Please read the safety information overleaf before carrying out any installation. Please retain the leaflet for future reference.

## Installation Instructions




Non-replaceable light source




Replaceable control gear by professional

### Wall mounted installation


**Step 1:** Remove Linear from packaging and ensure all components are included. Press the release clip on both sides to separate the securing bracket.

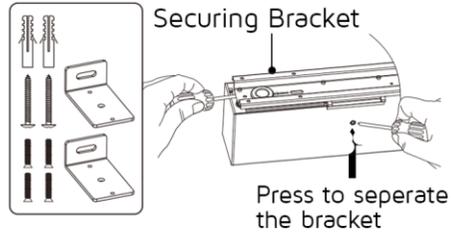


**Step 2:** Disconnect the LED connector and safety clips to release the Linear from the securing bracket.

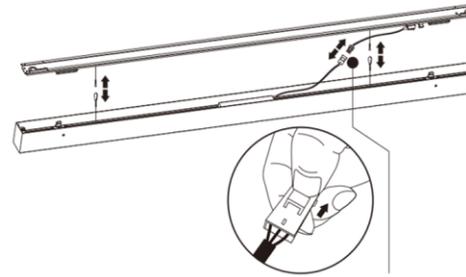


**Step 3:** Attach L shaped fixing brackets to Securing Bracket.

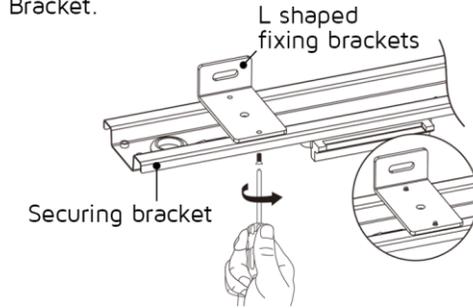

**Step 4:** Drill Rawl plug holes in the wall, insert Rawl plugs and then attach fixing brackets to wall.

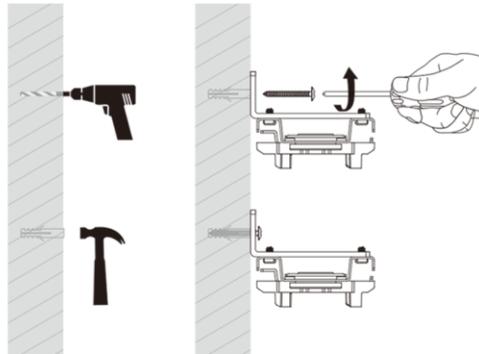


**Step 5:** Connect the power input cable in accordance to the below wiring diagram.

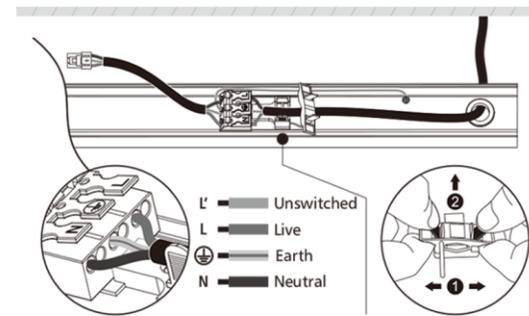

Standard	Emergency	Dali/Dim
L = Live ⊕ = Earth N = Neutral	L' = Unswitched L = Live ⊕ = Earth N = Neutral	DA/V+ = DIM+ DA/V- = DIM- L = Live ⊕ = Earth N = Neutral

**Step 6:** Re-attach the safety clips and the LED connector. Attach the Linear to securing bracket. Listen for the 'click' from the release clips to ensure it has attached correctly.

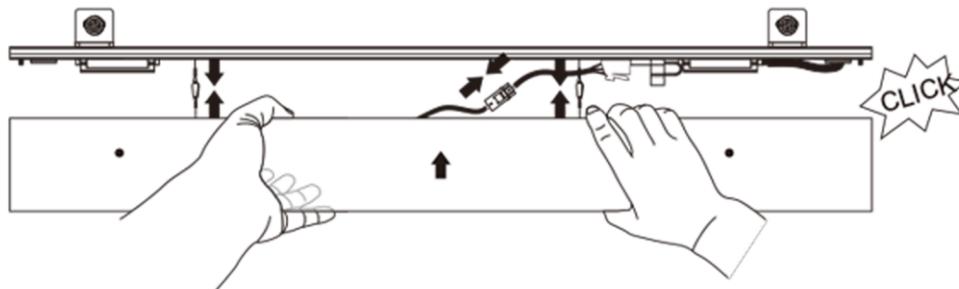

**Step 7:** Check that all fixings are secure and the Linear operates as intended.



COMPLETE