

### Safety Information

>All electrical work must be undertaken by a qualified contractor to ensure compliance with latest edition BS7671 and IEE/IET wiring regulations.


> Before installing an LED High Bay or doing any maintenance, ensure power supply is turned off at the circuit breaker or fuse box.

> This product is designed for permanent connection to fixed wiring; the circuit should be protected with the appropriate MCB or fuse.

### Environment

>Please DO NOT dispose of electrical items or packaging as unsorted waste. Use the recycling facilities provided by your local authorities.

### PRODUCT DIMENSIONS

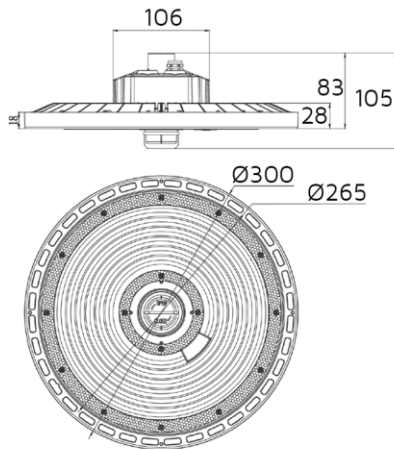

Product	A	B
150W	105	300

All units are in mm

### Important Warranty Information

The LED High Bay has a 3 year warranty, which can be extended free of charge to 5 years by registering online via the website address below. The registrant must provide the product part number and date of manufacture, which can be found on the label attached to the luminaire housing.



Certificate No. FS 590684



Certificate No. EMS 590685

NET LED Lighting  
Buckingham Business Park  
300 Anderson Road  
Cambridge  
CB24 4UQ  
sales@netled.co.uk  
www.netled.co.uk

Technical Helpline: 01223 851505  
Email: support@netled.co.uk


www.netled.co.uk/downloads

Distributed by



### ORWELL HIGH BAY INSTALLATION GUIDE

Part Number	Description
NET-23-12-60	150W Orwell High Bay Standard

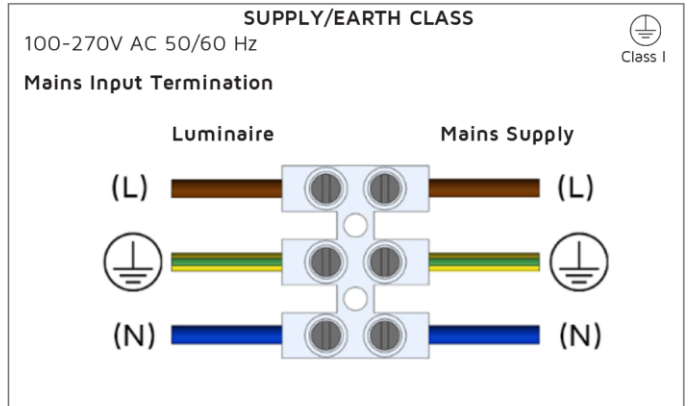

Installation procedure: Carefully read the instructions and ensure the mains supply is isolated before installation. Please follow the safety information overleaf before carrying out any installation. Please retain this leaflet for future reference.

**High Bay Installation:**




Non-replaceable light source





Non replaceable control gear

**Step 1:** Carefully remove the High Bay light from the packaging. Take out the eye bolt from the packaging and screw in tight on top of the High Bay. A mounting bracket option is available if required.

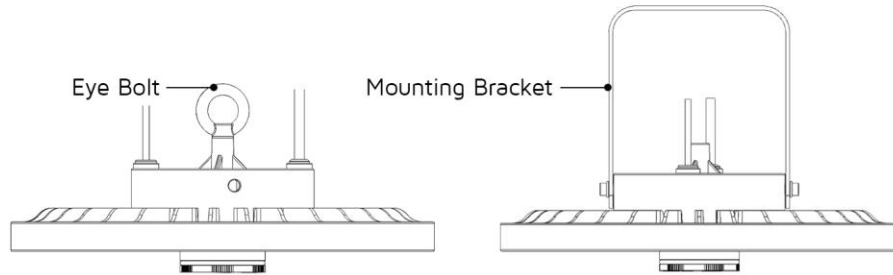


**Step 2:** Mount the High Bay light to the ceiling using a bracket or a suitable suspension kit.


**Mounting Bracket installation:** Attach the mounting bracket to the High Bay with the 2x M6 Anchor Bolts. Adjust the angle of the bracket, then attached the 2x securing screws.

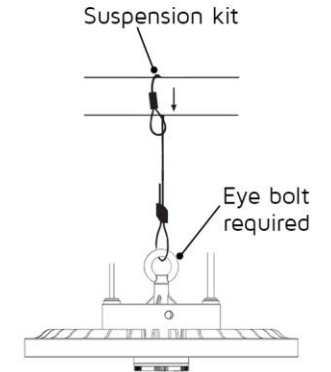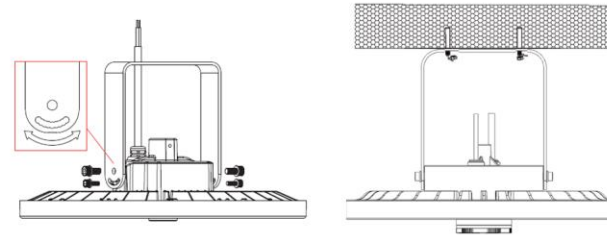

**Step 3:** Secure the supply cable using suitable clips. Ensure that the cable is not touching the body of the High Bay.

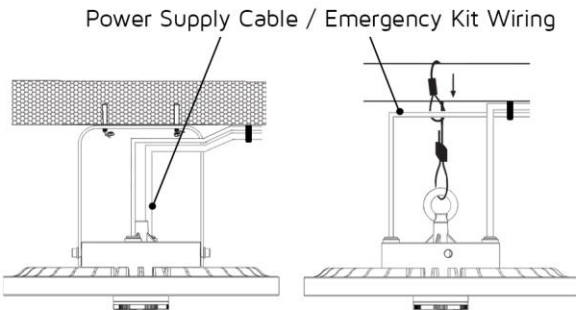


**Step 4:** A Microwave Sensor or PIR Sensor can be fitted if required. To fit a Sensor, remove the protective cap from the ZHAGA base, then install the required sensor.

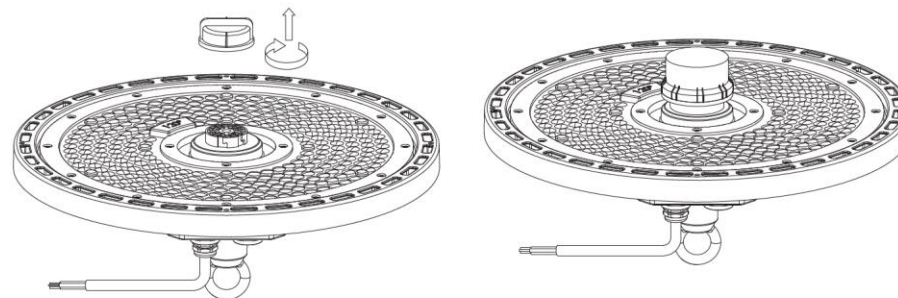

**Step 5:** Connect the cable to the mains as per the illustration below. Once connected, test the product to check that it operates correctly.

**Mains Input Termination**

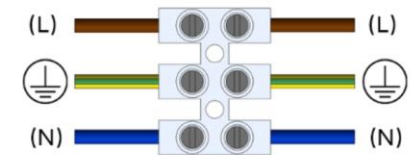

**Note:** Do not tamper with the Emergency kit wiring unless installing an Emergency Kit (High Voltage).

**Wattage selection:**

The LED driver is Wattage selectable, and can be adjusted between 90W, 120W and 150W.



Remove protective screw cap to reveal wattage section.



Select the preferred wattage output.



Refit the protective screw cap. Ensure that the screw cap is secured to prevent moisture ingress.