



skylinePRO

LED Wallpack

Designed to be used where the aesthetics of the light fitting, along with a tough robust construction is needed. The fittings are IP65 and IK8 compliant, supplied complete with an opal diffuser for even light distribution. Available in emergency and non emergency versions, the latter having a super-slim profile.

- Genuine replacement for 70W Metal Halide & Sodium
- Fully encapsulated IP65 TUV Certified Driver
- High impact polycarbonate lens
- Up to 65% energy saving
- 50000 hours

Options


- Photocell version complete with Lucy Zodion miniature photocell (55 lux)
- Emergency / Emergency Photocell version
- Asymmetric product available on request




LMR80: Maximum 20% of lumen depreciation over rated hours.

B10: Maximum 10% of fittings failure rate over rated hours

04425 Standard Version
04428 Photocell Version 30W

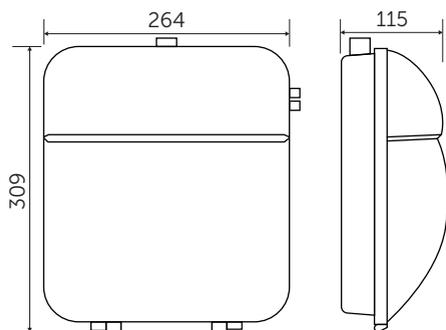

04419 Emergency Version
04417 Emergency / Photocell Version 30W

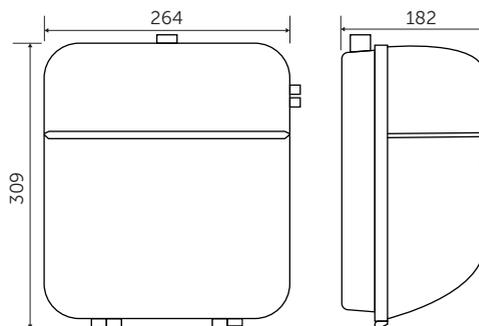

technical@belllighting.co.uk
sales@belllighting.co.uk

SkylinePRO

LED Wallpack

| Technical Specification | |
|-------------------------|--|
| Construction | Die Cast Aluminium Base / PVC Cover |
| Driver | Sosen |
| LED Chip | Samsung |
| IP Rating | IP65 |
| Operating Temp | -30°C to +35°C / Emergency version minimum temperature -5°C |
| Input Voltage | 110 - 240V (Photocell and emergency versions 240V only) |
| Power Factor | > 0.9 |
| CRI | 80 - Exceeds EU standard of Ra 70 for Colour Rendering Index |
| LMR | 80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio |

| Code | V | W | Description | Lm | Lm/W | Viewing Angle | Temp | Hours |
|-------|---------|----|--|------|------|---------------|-------|-------|
| 04425 | 110/240 | 30 | Skyline Pro LED Wallpack | 2550 | 85 | 120° | 4200K | 50000 |
| 04428 | 240 | 30 | Skyline Pro LED Wallpack Photocell version | 2550 | 85 | 120° | 4200K | 50000 |
| 04419 | 240 | 30 | Skyline Pro LED Wallpack Emergency version | 2550 | 85 | 120° | 4200K | 50000 |
| 04417 | 240 | 30 | Skyline Pro LED Wallpack Emergency Photocell version | 2550 | 85 | 120° | 4200K | 50000 |

Emergency versions must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty.

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio

² Exceeds EU standard of RA 70 for Colour Rendering Index

³ Subject to terms & conditions (Contact Customer Service)

