

Arc Wallpack

Installation instructions | Consignes d'installation



collingwood

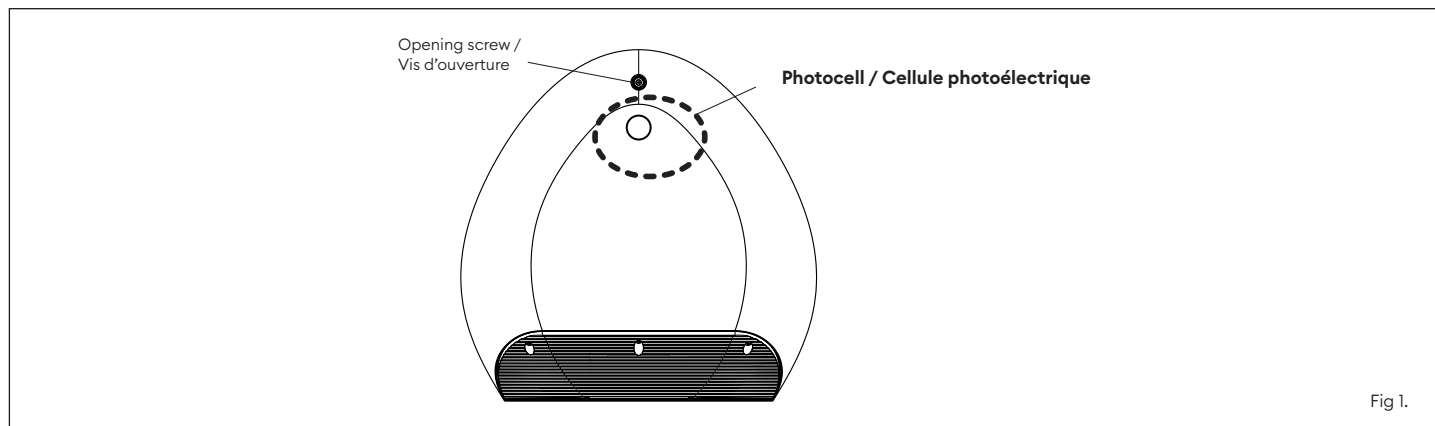


Fig 1.

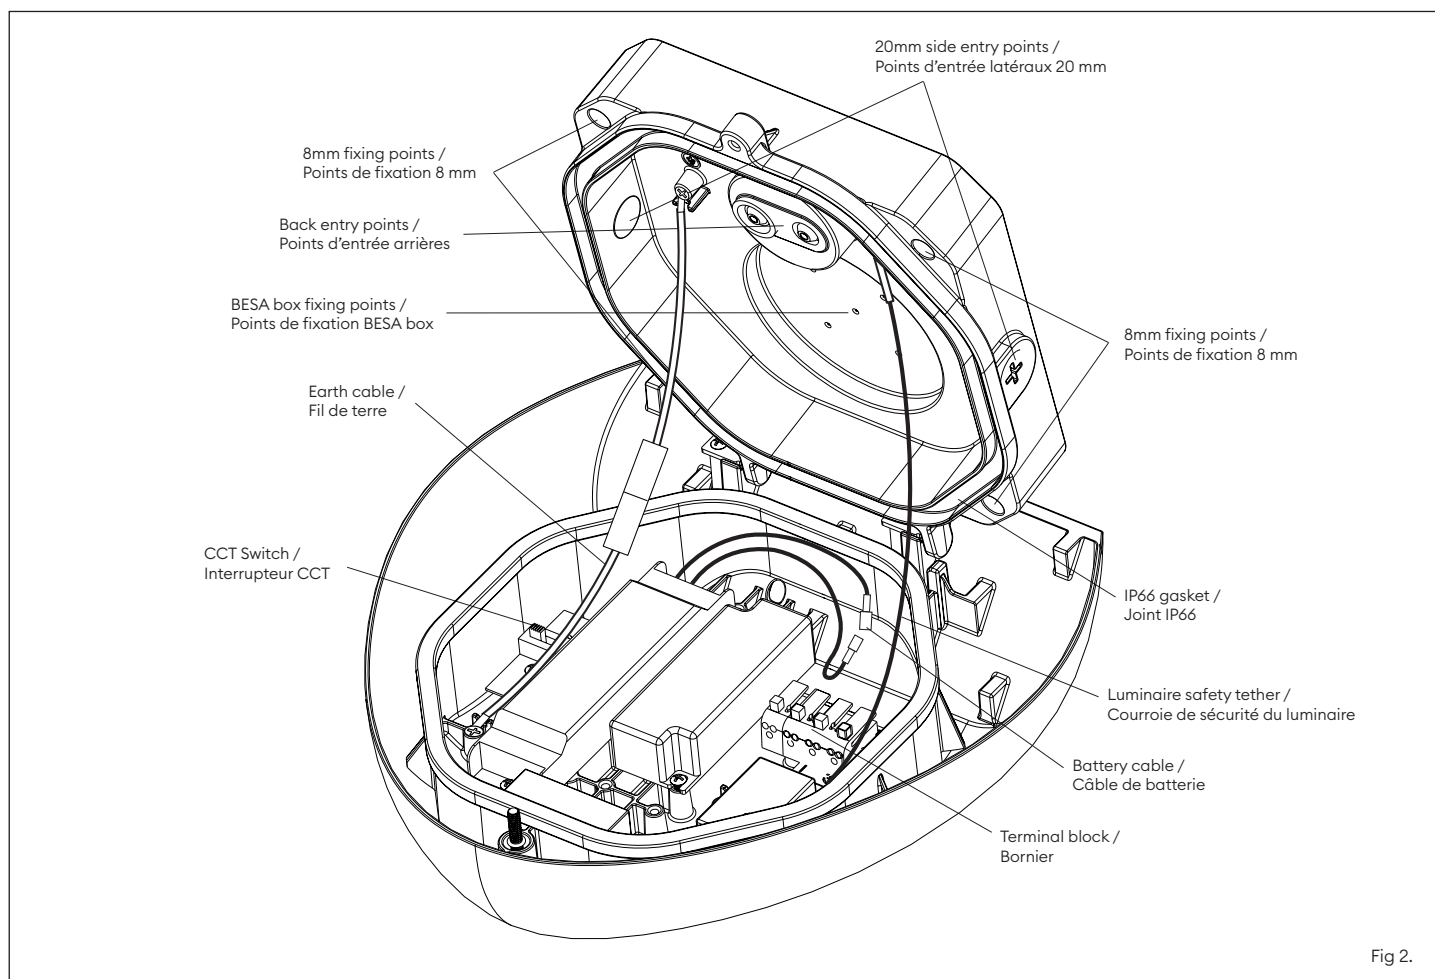


Fig 2.

4 year warranty
4 ans de garantie

Replaceable light source
by a professional
Source remplaçable par
un professionnel

Replaceable control gear
by a professional
Alimentation remplaçable
par un professionnel

This product contains a light source of
energy efficiency class C
Ce produit contient une source lumineuse
de classe d'efficacité énergétique C

en t +44 (0) 1604 495 151 | f +44 (0) 1604 495 095 | e sales@collingwoodgroup.com | w collingwoodlighting.com
Collingwood Lighting, Brooklands House, Sywell Aerodrome, Sywell, Northampton NN6 0BT, United Kingdom

fr t +33 (0) 4 816 816 10 | f +33 (0) 4 816 816 11 | e ventes@collingwoodgroup.com | w collingwoodlighting.com
Collingwood Lighting, 43-47 Avenue de la Grande Armée, 75116, Paris, France

CWI 8272 V3

Arc Wallpack

Installation instructions | Consignes d'installation



collingwood

en

Installation

1. Establish a mains supply to each wall light position.
2. Isolate the mains supply prior to wiring.
3. Unscrew the front screw located above the photocell, use provided allen key (Fig 1).
4. Open the product, undo the tether, unplug the earth and remove front face of the product.
5. Place the back cover on the wall and mark fixing positions. The distance between each mark should be 162mm +/- 2mm. If using the supplied wall plugs, drill Ø8mm holes.
Note: Wall pack can be mounted on BESA boxes, drill the holes in the marked positions of the back cover. To maintain IP rating of the product seal the connection between BESA box and luminaire.
6. Feed the mains cable through one of the cable entry points and fix the back cover to the wall. To maintain IP rating of the product ensure grommet or cable gland is used for cable entry point.
7. Refit the front face, reconnect earth and tether.
8. Connect mains supply to the terminal block: L = live, ⊕ = earth, N = neutral.
Note: The photocell activates the product to turn on at 10 - 20lux level.
9. Connect the battery cable (Fig 2).
10. Set required colour temperature, default is 3000K, see Fig 2 for location of the switch.
11. Close the front face ensuring the IP gasket is fitted to the back cover and free from debris. Secure it with the screw.

Emergency pack commissioning (emergency version only)

1. Provide an uninterrupted mains power supply (permanent live) for 24 hours.
2. Check that the green indicator LED light is lit. This confirms that the battery is charging. If the green LED is ever not lit, investigate immediately and rectify the fault.
3. Remove the mains supply - the unit will operate under battery power for 3 hours minimum.
4. Restore mains power to the unit, check light functions correctly.

Testing (emergency version only)

Periodic testing of the unit must be performed in line with the appropriate regulations.

Installation data

- Isolate the mains supply, prior to wiring.
- This unit must be wired by a qualified electrician or suitable competent person.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- When the unit no longer meets its rated emergency duration the emergency pack shall be replaced (AREMGKIT).

Product / Produit	ARA1N, ARA1NE	ARA2N, ARA2NE
Rated voltage / Tension nominale	220 - 240V AC 50/60Hz	220 - 240V AC 50/60Hz
Input current / Courant d'entrée	50mA max	80mA max
Power / Puissance	10W max	17W max
Power factor / Facteur de puissance	>0.95	>0.95
Inrush current / Courant d'appel	15.1A 113µs	16A 214µs



Disposal of this product should be separate from household waste. Please separate these items from other types of waste and recycle them responsibly to promote the sustainable reuse of material resource. Household users should contact their local government office for details of where and how they can take these items for environmentally safe recycling.



Ce produit ne doit pas être éliminé avec les ordures ménagères. Merci de le séparer des autres déchets et de le recycler de manière responsable afin de promouvoir la réutilisation des ressources matérielles. Les consommateurs doivent contacter leurs autorités locales pour plus d'information quant aux lieux et méthodes de recyclage en accord avec la protection de l'environnement.



4 year warranty
4 ans de garantie



Replaceable light source
by a professional
Source remplaçable par
un professionnel



Replaceable control gear
by a professional
Alimentation remplaçable
par un professionnel

This product contains a light source of
energy efficiency class C
Ce produit contient une source lumineuse
de classe d'efficacité énergétique C

en t +44 (0) 1604 495 151 | f +44 (0) 1604 495 095 | e sales@collingwoodgroup.com | w collingwoodlighting.com
Collingwood Lighting, Brooklands House, Sywell Aerodrome, Sywell, Northampton NN6 0BT, United Kingdom

fr t +33 (0) 4 816 816 10 | f +33 (0) 4 816 816 11 | e ventes@collingwoodgroup.com | w collingwoodlighting.com
Collingwood Lighting, 43-47 Avenue de la Grande Armée, 75116, Paris, France

CWI 8272 V3

Arc Wallpack

Installation instructions | Consignes d'installation



collingwood

en

Emergency installation and maintenance record

fr

Dossier d'installation et service de l'éclairage de sécurité

Product | Produit : _____

Installer | Installateur : _____

Date installed | Date d'installation : _____

Commissioning by | Mise en service par : _____

Date commissioned | Date de mise en service : _____

Month Mois	Year 1 Année 1		Year 2 Année 2		Year 3 Année 3		Year 4 Année 4	
	Signed Signature	Date Date	Signed Signature	Date Date	Signed Signature	Date Date	Signed Signature	Date Date
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								

4 year warranty
4 ans de garantie

Replaceable light source
by a professional
Source remplaçable par
un professionnel

Replaceable control gear
by a professional
Alimentation remplaçable
par un professionnel

This product contains a light source of
energy efficiency class C
Ce produit contient une source lumineuse
de classe d'efficacité énergétique C

en t +44 (0) 1604 495 151 | f +44 (0) 1604 495 095 | e sales@collingwoodgroup.com | w collingwoodlighting.com
Collingwood Lighting, Brooklands House, Sywell Aerodrome, Sywell, Northampton NN6 0BT, United Kingdom

fr t +33 (0) 4 816 816 10 | f +33 (0) 4 816 816 11 | e ventes@collingwoodgroup.com | w collingwoodlighting.com
Collingwood Lighting, 43-47 Avenue de la Grande Armée, 75116, Paris, France