



LED Converter


The Arial LED Converter is an unrivalled product when it comes to versatility in the LED market.

- All in one solution
- Selectable colour temperature
- Integral switches for multiple wattages and CCT
- Cool White / Warm White / Daylight
- Selectable wattage
- Fully adjustable / Innovative bracket
- Fits cut-outs 65mm to 205mm
- 50000 Hours




LMR80: Maximum 20% of lumen depreciation over rated hours.


B10: Maximum 10% of fittings failure rate over rated hours

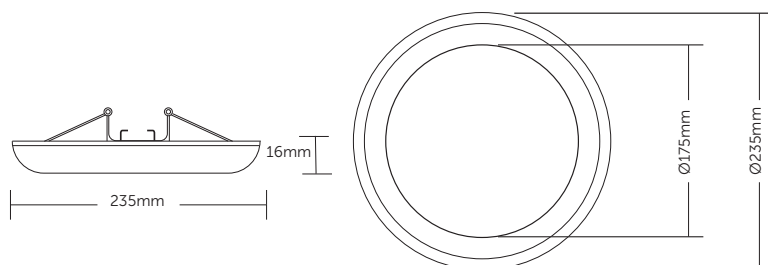

Selectable Colour Temperature



Selectable Wattage



technical@bellighting.co.uk
sales@bellighting.co.uk



LED Converter

Technical Specification	
Construction	Polycarbonate
Driver	BELL
LED Chip	Samsung
IP Rating	IP20
Operating Temp	0°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
L1A / L1B / L2A / L2B Compliant	Yes

Code	W	Description	Lm	Temp	Hours
06840	10/13/16	Ariel LED Converter	950-1800	3000K / 4000K / 6000K	50000
08196	-	Emergency Pack for above	-	-	-

Colour Temperature 3000K - 6000K		
Watts	10W	950 - 1000 Lumens
	13W	1200 - 1450 Lumens
	16W	1500 - 1800 Lumens

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of RA 80 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)

