





IP65 LED Panel


The IP65 version of our Arial LED Panel is an ideal product for areas that may contain moisture such as changing rooms, locker rooms & commercial kitchen environments.

- Front face IP65
- Professional LED panel
- 0-10V Dimming or DALI Dimming options available
- White frame
- BELL Driver
- Anti-twist frame
- Emergency panels with 5 year battery guarantee available




LMR80: Maximum 20% of lumen depreciation over rated hours.

B10: Maximum 10% of fittings failure rate over rated hours

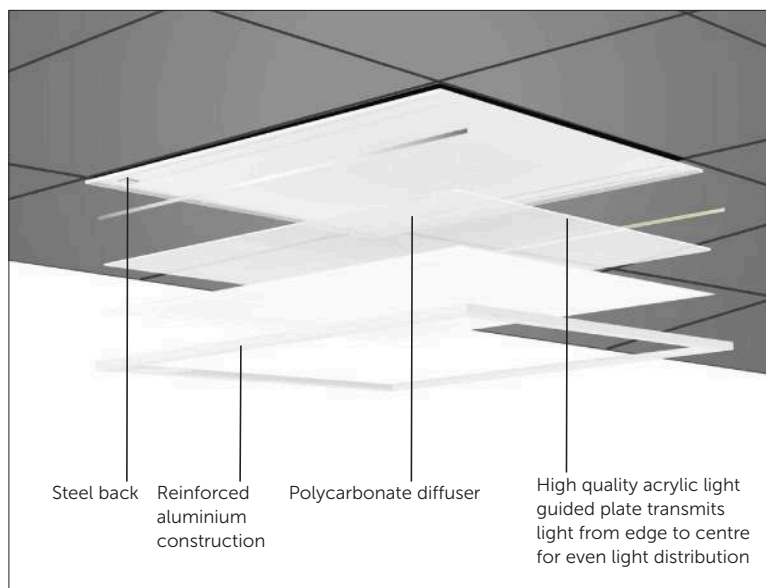

No Light Fall Off



Seamless Trim Design



technical@belllighting.co.uk
sales@belllighting.co.uk



IP65 LED Panel

188

Technical Specification	
Construction	Aluminium + PMMA
Driver	BELL
LED Chip	Philips
IP Rating	IP65 (Front face)
Operating Temp	0°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
L1A / L1B / L2A / L2B Compliant	Yes
Emergency Battery Type	NiCd 1 Year Emergency / LiFePO4 5 Year Emergency


Code	W	Description	Lm/W	Lm	Temp	Finish	Hours
10047	36	600 x 600 IP65 LED Panel	105	4000	4000K	White	50000
10097	36	600 x 600 IP65 LED Panel Emergency	105	4000	4000K	White	50000
10050	36	600 x 600 IP65 LED Panel 0-10V Dim	105	4000	4000K	White	50000
10049	36	600 x 600 IP65 LED Panel Dali Dim	105	4000	4000K	White	50000

Available on request:

- Emergency panels with 5 year battery guarantee
- Emergency 0-10V Dim
- Emergency Dali Dim

For further information call 01924 893380 or email sales@belllighting.co.uk

Emergency versions must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty.

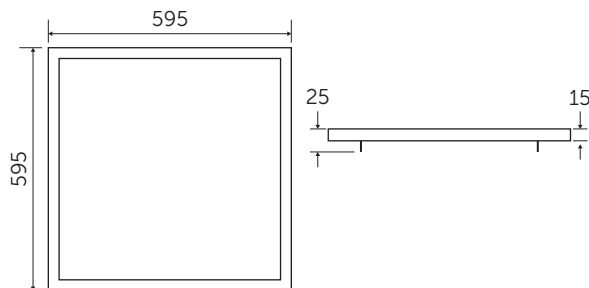

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio

² Exceeds EU standard of RA 80 for Colour Rendering Index

³ Subject to terms & conditions (Contact Customer Service)

