





## LED Integrated Bollard


The Luna Integrated Bollard Range, available in 3 different wattages with root mounting kits provided as standard for secure fitting. Perfect for driveways and amenity lighting to ensure safe passage of visitors and staff. Sleek, modern design, powder coated aluminium construction coupled with the efficiency of LED means these units are 'fit and forget'.

- Clear polycarbonate diffuser
- Root mounting kit included
- Powder coated aluminium construction
- Choice of heights 500/700/1000mm
- Designed to minimise light pollution
- 360° Light distribution
- Warm White
- 30000 Hours



**LMR80:** Maximum 20% of lumen depreciation over rated hours.

**B10:** Maximum 10% of fittings failure rate over rated hours

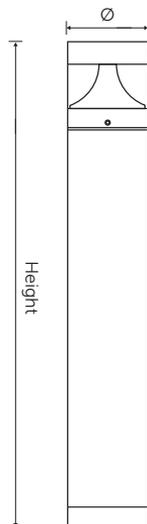

	6W	8W	10W
Height	500mm	700mm	1000mm
Ø	120mm	120mm	160mm



technical@belllighting.co.uk  
sales@belllighting.co.uk



# LED IP65 Integrated Bollard

## Technical Specification

Construction	Powder coated aluminium
Driver	BELL
LED Chip	Samsung
IP Rating	IP65
Operating Temp	-30°C to +35°C
Input Voltage	220-240V
Power Factor	> 0.9
CRI	80 - Exceeds EU standard of Ra 70 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio

Code	V	W	Lm	Description	Temp	Hours
10440	100-240	6	366	Luna 6W IP65 LED 500mm Bollard	3000K	30000
10441	100-240	8	605	Luna 8W IP65 LED 700mm Bollard	3000K	30000
10442	100-240	10	685	Luna 10W IP65 LED 1000mm Bollard	3000K	30000

<sup>1</sup> Exceeds EU standard of 70 for Lumens Maintenance Ratio

<sup>2</sup> Exceeds EU standard of Ra 70 for Colour Rendering Index

<sup>3</sup> Subject to terms & conditions (Contact Customer Service)

