



Scan QR code to go to web page


eterna.

INSTALLATION INSTRUCTIONS

110V Globe Light

E14GL 110V 30W 6000K Globe Light

E14GLI 110V 30W 6000K Emergency Globe Light

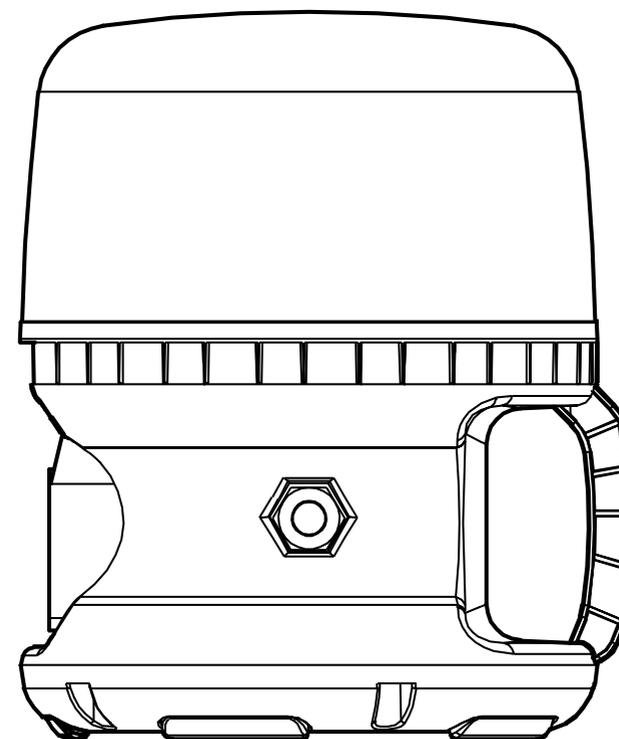

LED LAMP SPECIFICATIONS	
Luminaire lumens	30W 3050lm
Colour temperature	6000K
Nominal life time of the lamp	50,000 hrs
Number of switching cycles before premature lamp failure	25,000
Warm-up time up to 60% of the full light output	Instant
Dimmable	No
Nominal beam angle	120°
Displacement factor	0.9
Lumen maintenance factor at end of nominal life	0.7
Colour rendering	80
Colour consistency	<6
Rated peak intensity	447cd
Voltage / frequency	110V~ 50Hz
Lumen efficacy	100lm/W
This product contains a light source of energy efficiency class D	
Not suitable for accent lighting	

EVENTUALLY, YOU MAY WANT TO REPLACE THIS PRODUCT:

Regulations require the recycling of Waste from Electrical and Electronic Equipment (European "WEEE Directive" effective August 2005—UK WEEE Regulations effective February 2014). Environment Agency Registered Producer: WEE/GA0248QZ.

When your product comes to the end of its life or you choose to replace it, please recycle it where facilities exist - do not dispose with household waste.


CLEANING:

Clean this fitting only with a soft dry cloth. Do not use any chemical or abrasive cleaners.

Do not use any chemical or abrasive cleaners.

IF YOU EXPERIENCE PROBLEMS:

If you believe your product is defective, please return it to the place where you bought it. Our Technical Team will gladly advise on any Eterna Lighting product, but may not be able to give specific instructions regarding individual installations.



Huxley Close, Wellingborough, Northamptonshire, UK, NN8 6AB
Unit B4D, Airport Business Park, Cloghran, Co. Dublin, Ireland, K67X 7H9

Email: sales@eterna-lighting.co.uk / technical@eterna-lighting.co.uk
Visit our website: www.eterna-lighting.co.uk

Issue 0126

Made in China

Pack contents: 1x LED fitting with 5m pre-wired cable and socket

A guide for qualified electricians

READ THIS FIRST:

Check the pack and make sure you have all of the parts listed on the front of this booklet. If not, contact the outlet where you purchased this product.

This product must be installed by a competent person in accordance with the current building and IEE wiring regulations.

As the buyer, installer and/or user of this product, it is your own responsibility to ensure that this fitting is fit for the purpose for which you have intended it. Eterna Lighting cannot accept any liability for loss, damage or premature failure resulting from inappropriate use.

This product is designed and constructed according to the principles of the appropriate British Standard. Using this fitting in an environment where there are prolonged periods of use or higher than normal ambient temperatures may result in a shortened working life.

Switch off the mains before commencing installation and remove the appropriate circuit fuse or lock off MCB.

This product is designed for permanent connection to fixed wiring: this must be a suitable circuit (protected with the appropriate MCB or fuse).

Make sure that the fixings are strong enough to support the weight of the fitting and hold it securely.

When working at heights, ensure you use a suitable platform.

When making connections, ensure that the terminals are tightened securely and that no strands of wire protrude. Check that the terminals are tightened onto the bared conductors and not onto any insulation.

You are advised at every stage of your installation to double-check any electrical connections you have made. After you have completed your installation, there are electrical tests that should be carried out; these tests are specified in the current IEE wiring and building regulations. If in doubt, consult a qualified electrician.

INSTRUCTIONS:

The fitting is for use with 110V supply only.

The globe light has three mounting options - stand-alone, tripod and hanging hook

Plug into a suitable 110V transformer/power supply using the cable provided.

Emergency Option Charging - Ensure the side switch is set to 'ON'. To charge the battery, keep the globe light connected and powered on. The longer it remains connected, the longer the emergency light will operate when activated (e.g., 24 hours of charging provides approximately 3 hours of emergency runtime).

Disabling Emergency Mode - If you disconnect power from the globe light and do not want it to run in emergency mode, set the switch to 'OFF'. Remember to return the switch to 'ON' before resuming normal operation.

The 110V globe light includes an auxiliary socket. This can be used to attach additional globe lights, a maximum of 20 fittings can be connected together in this way.

LAMP REPLACEMENT:

CAUTION, RISK OF ELECTRIC SHOCK

The light source is designed to last the lifetime of the luminaire.

The light source contained in this luminaire shall only be replaced by the manufacturer, service agent or a similar qualified person.



SAFETY INFORMATION:

- DO NOT pull the plug from the socket by the cable
- DO NOT pull or carry the work light by the power cable
- DO NOT use worn or damaged cables, plugs or connectors.
- If the power supply and plug are connected outdoors, the work light must be connected to an IP44 (minimum) rated power socket
- Ensure the cable does not cause a trip or fall hazard

