

EVENTUALLY, YOU MAY WANT TO REPLACE THIS PRODUCT:

Regulations require the recycling of Waste from Electrical and Electronic Equipment (European "WEEE Directive" effective August 2005—UK WEEE Regulations effective February 2014). Environment Agency Registered Producer: WEE/GA0248QZ.

When your product comes to the end of its life or you choose to replace it, please recycle it where facilities exist - do not dispose with household waste.

CLEANING:

Clean this fitting only with a soft dry cloth. Do not use any chemical or abrasive cleaners.

IF YOU EXPERIENCE PROBLEMS:

If you believe your product is defective, please return it to the place where you bought it. Our Technical Team will gladly advise on any Eterna Lighting product, but may not be able to give specific instructions regarding individual installations.

Product Type	PIR Sensor
Detection Range	3-6m
Duration time	30s up to 8 mins
Detection zone	100°
Voltge	230-240VAC ~50Hz
Mounting	Indoors, ceiling and wall

eterna.


INSTALLATION INSTRUCTIONS

E04UPIR

Plug Play PIR Sensor



Scan QR code to go to web page

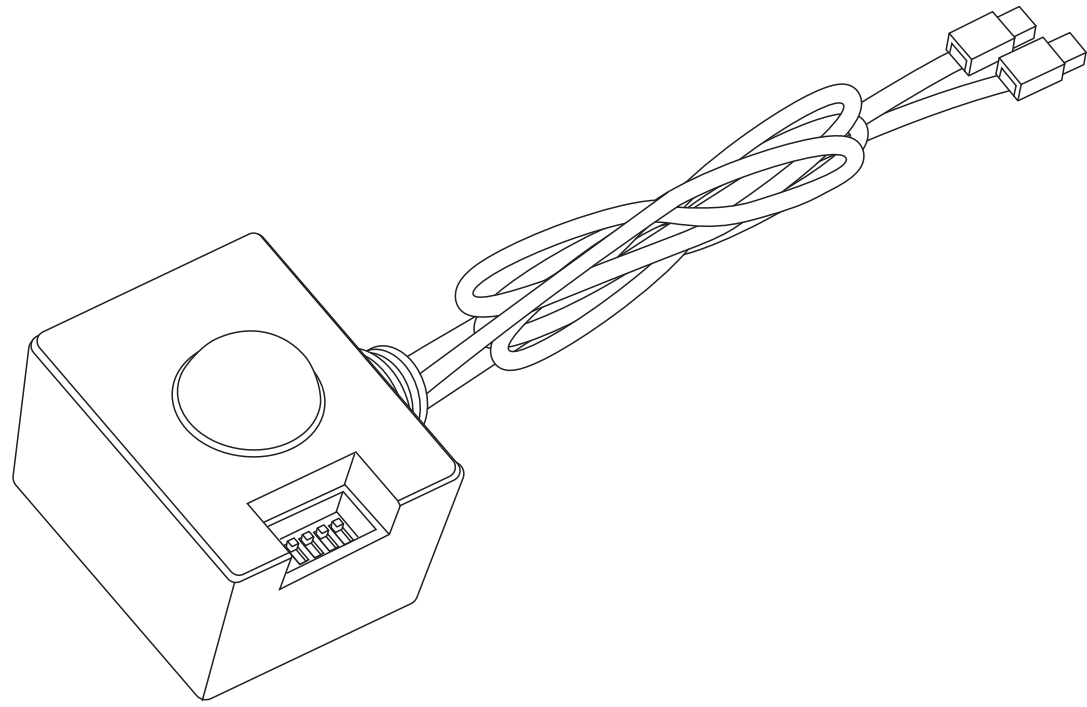

Huxley Close, Wellingborough, Northamptonshire, UK, NN8 6AB
Unit B4D, Airport Business Park, Cloghran, Co. Dublin, Ireland, K67X 7H9

Email: sales@eterna-lighting.co.uk / technical@eterna-lighting.co.uk
Visit our website: www.eterna-lighting.co.uk

Issue 1125

Made in China

Pack contents: 1 x PIR Sensor

A guide for qualified electricians

READ THIS FIRST:

Check the pack and make sure you have all of the parts listed on the front of this booklet. If not, contact the outlet where you bought this product.

This product must be installed by a competent person in accordance with the current building and IEE wiring regulations.

As the buyer, installer and/or user of this product it is your own responsibility to ensure that this fitting is fit for the purpose for which you have intended it. Eterna Lighting cannot accept any liability for loss, damage or premature failure resulting from inappropriate use.

This product is designed and constructed according to the principles of the appropriate British Standard and is intended for normal domestic service.

Switch off the mains before commencing installation and remove the appropriate circuit fuse or lock off MCB.

This product is designed for permanent connection to fixed wiring: this must be a suitable circuit (protected with the appropriate MCB or fuse).

When making connections ensure that the terminals are tightened securely and that no strands of wire protrude. Check that the terminals are tightened onto the bared conductors and not onto any insulation.

This product is double insulated. DO NOT CONNECT ANY PART TO EARTH.

This product is not intended to be used by children and persons with sensory, physical and/or mental impairments that would prevent them from using it safely.

You are advised at every stage of your installation to double-check any electrical connections you have made. After you have completed your installation there are electrical tests that should be carried out, these tests are specified in the current IEE wiring and building regulations.

INTRODUCTION:

This is a pasive infrared sensing device which continuously scans the operating zone and immediately switches the light on when it detects movement in that area. This means that whenever movement is detected within the range of the sensor the light will switch on automatically and illuminate the area you have selected to light. While there is movement within range of the unit the light will remain on.

INSTALLATION:

- Switch off power supply
- Remove knock out tab from the end cap from BATLED fitting
- Remove lock nut from PIR enclosure
- Thread cables throught the batten and replace lock nut
- Connect plugs using labels for guidance
- Turn on mains supply

DIP SWITCH SETTINGS:

Dip switches to change NIGHT/DAY and TIME settings

- 1 - ON = Night Only / OFF = Day and Night
- 2 - ON = SENS(-) / OFF = SENS(+)

3 - 30s	NOTE: SELECT ONE TIME SETTING ONLY
4 - 3 mins	
5 - 5 mins	
6 - 8 mins	

If the sensor is set to work on night setting it will be activated at 30 lux and deactivated at 70 lux

