



SkylineELITE+

Asymmetric LED Floodlight

Skyline Elite+ represents the latest technology in sports floodlighting. Modern aesthetic, die-cast aluminium construction with asymmetrical high output and high efficiency light distribution. Perfect for large external sports facilities or industrial applications, complete with fully adjustable mounting bracket for precise light direction. Light shielding helps avoid light trespass, giving this unit a 0% ULOR rating.


- 1200W Asymmetric Floodlight
- Genuine replacement for 2000W Metal Halide
- 126 Lm/W
- IP66
- Fully adjustable mounting bracket
- Angle markings for easy alignment
- Asymmetric 0% ULOR
- Low weight & windage when compared with HID luminaires

1200W \equiv 2000W MH Energy Saving 40%



LMR80: Maximum 20% of lumen depreciation over rated hours.

B10: Maximum 10% of fittings failure rate over rated hours

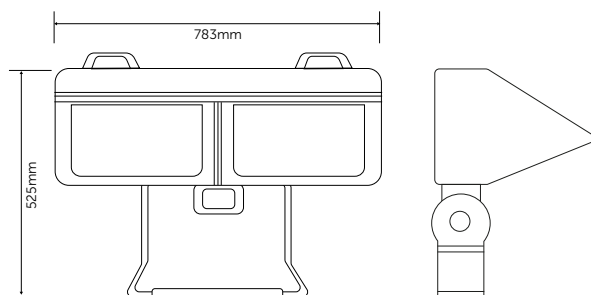

technical@belllighting.co.uk
sales@belllighting.co.uk

SkylineELITE+

Asymmetric LED Floodlight

24

Technical Specification	
Construction	Die Cast LM6 Aluminium & Polycarbonate lens
Driver	Inventronics 1-10V Dim
LED Chip	Sosen
IP Rating	IP66
Operating Temp	-30°C to +35°C
Input Voltage	100 - 277V (277 - 440V special order)
Power Factor	> 0.9
CRI	80 - Exceeds EU standard of Ra 70 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
Weight	28.8 Kg
Windage	0.21M ²

Code	V	W	Description	Lm	Peak Intensity	Temp	Lm/W	Hours
10760	100-277	1200	Asymmetric LED Floodlight	151200	1241.50 cd/klm @ 71°	4000K	126	70000

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio

² Exceeds EU standard of RA 70 for Colour Rendering Index

³ Subject to terms & conditions (Contact Customer Service)

