

Made In Britain, made better.



Options for every application.

- Adjustable spigot allows you to choose between two mounting options - horizontal or vertical
- Adjustable head by -15° to $+15^{\circ}$
- Optional Flat Wall Bracket or Double Outreach Arm Bracket for those awkward installs

Built-in, energy saving Virtual Midnight function.


- Your fitting will measure the time between sunset and sunrise and dim the light at the midpoint, saving your customer even more money!

We stock it, so you don't have to!
Delivery direct to branch or site.

AVAILABLE IN 3000K, 4000K OR 6000K OPTIONS



SLIP FITTER FOR USE ON 60 OR 76MM POLES

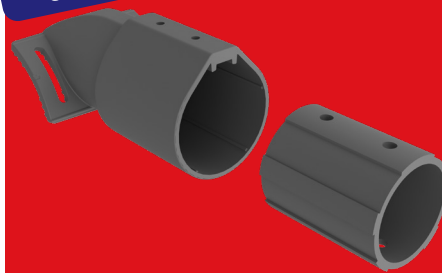

OPTIONAL 3 PIN NEMA PHOTOCELL SENSOR



Technical Specifications

Colour Rendering	>70 CRI
Driver Output Voltage (DC)	80-130V
Input Voltage (AC)	100-270V
Luminaire Efficacy	133lm/W
Driver Manufacturer	Tridonic
Housing Colour	Grey
Housing Material	Aluminium
Lifespan LM ₈₀	100,000 Hours
Diffuser Material	Glass
Dimmable	No
Manufacturer	NET LED Lighting



30W

NET-33-20-03 (3000K)
NET-33-20-04 (4000K)
NET-33-20-06 (5000K)



50W

NET-33-20-13 (3000K)
NET-33-20-14 (4000K)
NET-33-20-16 (6000K)



80W

NET-33-20-23 (3000K)
NET-33-20-24 (4000K)
NET-33-20-26 (6000K)




100W

NET-33-20-33 (3000K)
NET-33-20-34 (4000K)
NET-33-20-36 (6000K)




130W

NET-33-20-43 (300K)
NET-33-20-44 (4000K)
NET-33-20-46 (6000K)



**3 Pin NEMA
Photocell Sensor**
NET-23-20-08

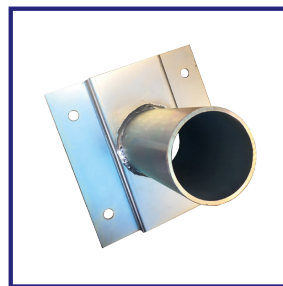

Flat Wall Bracket
NET-23-16-53



**Double Outreach
Arm Bracket**
NET-23-16-51

Order now over at
www.mynetled.co.uk

 **ORDER BY 6PM**
FOR NEXT DAY DELIVERY

 **NET LED
LIGHTING**