

**REPLACEMENT BATTERY TYPE:**  
3.2V 1500mAh LiFePO4 – replacement battery code:  
EB34

**BATTERY REPLACEMENT:**


If after routine operation check, the lamp does not remain lit for the three hour period, a new battery pack may be required.

- 1) Switch off the electricity at the mains and allow batteries to fully discharge then reconnect to supply and allow charging for 24 hours.
- 2) Test again for 3 hours, if light does not remain lit, then change the battery pack as follows:
- 2a) Isolate from mains supply and unplug the battery plug lead from the socket and re-plug the new battery.
- 2b) Restore power and allow charging for 24 hours.
- 2c) Perform full operation check and update test record.

**IMPORTANT NOTES:**

The battery charging circuit and components are separated from the mains by at least basic (single layer) insulation.

When energised by a constant mains supply, the battery will be constantly charged whether or not the lamp is illuminated. On failure of the constant mains supply, the fitting will switch automatically using transistorised switching from battery charging to battery discharge powering the lamp whether or not the lamp was illuminated before the power failure.



**DANGER!**

NOTE: this unit has a permanent live mains supply, please ensure you isolate before removing cover. There is also a seperate switched supply that controls the emergency light fitting – this also needs to be isolated.

**EVENTUALLY, YOU MAY WANT TO REPLACE THIS PRODUCT:**

Regulations require the recycling of Waste from Electrical and Electronic Equipment (European “WEEE Directive” effective August 2005—UK WEEE Regulations effective February 2014). Environment Agency Registered Producer: WEE/GA0248QZ.

When your product comes to the end of its life or you choose to replace it, please recycle it where facilities exist – do not dispose with household waste.

**INDUSTRIAL BATTERIES:**

Within certain products Eterna Lighting Ltd places lead acid, lithium ion, nickel cadmium & nickel metal hydride batteries on the market. Industrial batteries are subject to waste regulation under the Waste Batteries and Accumulators Regulations 2009 and should be disposed of responsibly. Purchasers may be able to dispose of their waste industrial batteries locally via legitimate licensed trade waste contractors. Eterna is obliged to take back, free of charge and within a reasonable time, waste industrial batteries of the same chemistry supplied to a Purchaser, for treatment and recycling and is required to do this in any calendar year new industrial batteries are placed on the market. In certain circumstances, this may include batteries not originally supplied by Eterna. If any Purchaser requires Eterna to take back Industrial batteries, please email: [technical@eterna-lighting.co.uk](mailto:technical@eterna-lighting.co.uk), who will then advise on the necessary arrangements for the receipt, proper treatment and recycling of, the waste industrial batteries.

**CLEANING:**

Clean this fitting only with a soft dry cloth. Do not use any chemical or abrasive cleaners.

**IF YOU EXPERIENCE PROBLEMS:**

If you believe your product is defective, please return it to the place where you bought it. Our Technical Team will gladly advise on any Eterna Lighting product, but may not be able to give specific instructions regarding individual installations.



Huxley Close, Wellingborough, Northamptonshire, UK, NN8 6AB  
Unit B4D, Airport Business Park, Cloghran, Co. Dublin, Ireland, K67X 7H9

Email: [sales@eterna-lighting.co.uk](mailto:sales@eterna-lighting.co.uk) / [technical@eterna-lighting.co.uk](mailto:technical@eterna-lighting.co.uk)  
Visit our website: [www.eterna-lighting.co.uk](http://www.eterna-lighting.co.uk)

Issue 1124


Made in China

eterna.

**INSTALLATION INSTRUCTIONS**

**E02U01ES**  
**PlugPack**

3W Standard and Self-Test Switchable Emergency Module

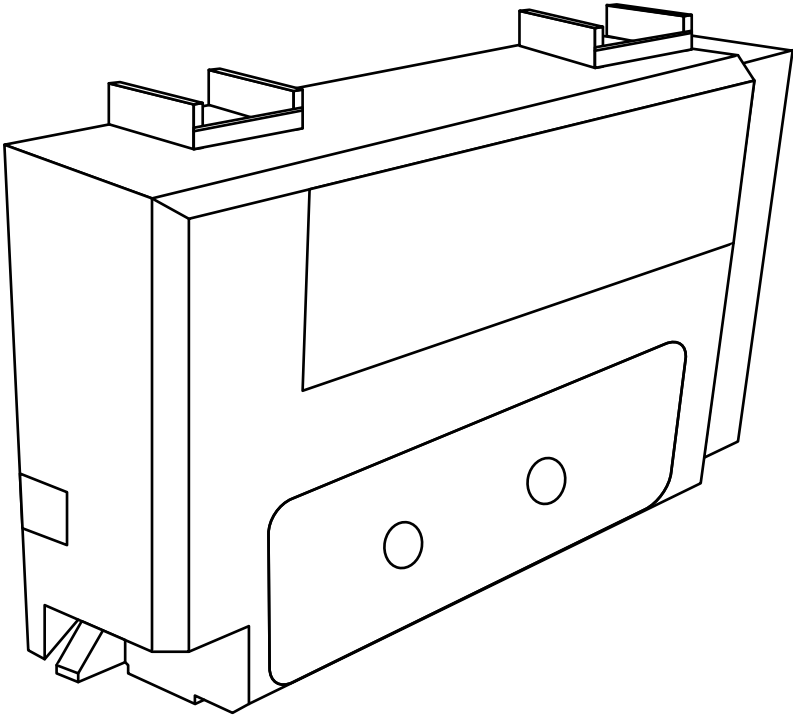

**Pack contents:** 1 x Emergency battery pack, 2x labels

**A guide for qualified electricians**



Scan QR code  
to go to web page

**PlugPack**  
Compatible

READ THIS FIRST:

Check the pack and make sure you have all of the parts listed on the front of this booklet. If not, contact the outlet where you bought this product.

This fitting must be installed by a competent person in accordance with the current building and IEE wiring regulations.

As the buyer, installer and/or user of this product it is your own responsibility to ensure that this fitting is fit for the purpose for which you have intended it. Eterna Lighting cannot accept any liability for loss, damage or premature failure resulting from inappropriate use.

Switch off the mains before commencing installation and remove the appropriate circuit fuse or lock of MCB.

Disconnect from the electrical supply before flash or high voltage testing.

This unit is suitable for indoor use only.

Do not cover the fitting with any insulating materials.

You are advised at every stage of your installation to double-check any electrical connections you have made. After you have completed your installation there are electrical tests that should be carried out: these tests are specified in the Wiring Regulations (BS7671) referred to in the Building Regulations.

The batteries supplied with this fitting are a consumable part and therefore may be outside of any warranty offered.

**NOTE:** please keep this instruction booklet and the test record in a safe place. A fire officer or other authorised person may want to see your record of inspection and testing.

STANDARD EMERGENCY:

OPERATION CHECKS:

Periodic testing should be carried out to ensure emergency lighting is operating correctly. Interruption of the supply, causing the fitting to be energised from the battery, should be carried out by the operation of a local keyswitch or other isolation device. During this period all fittings should be examined visually to ensure that they are functioning correctly. At the end of the test period the supply shall be restored and all indicator lamps or devices checked to ensure that the normal supply has been restored.

**DAILY:**  
Visual inspection of the battery charge LED.

**EACH MONTH:**  
Isolate the power supply for a period sufficient to ensure that each lamp is illuminated. Endorse the test record form supplied.

**ONCE EACH YEAR:**  
Isolate the power supply and check that the light is still illuminated after 3 hours. Endorse the test record form.

Because of the possibility of a failure of the normal lighting supply occurring shortly after a period of testing of the emergency lighting system or during the subsequent recharge period, all full duration tests shall wherever possible be undertaken preceding time of low risk to allow for battery recharge.

SELF-TEST EMERGENCY:

OPERATION CHECKS:

This product is fitted with an automatic, self-test function that will commission and test itself in accordance with the requirements of the British Standards. Monthly and annual tests will be automatically completed as detailed below with tests including battery charge condition, functional test and duration test.

Monthly – ten minute functional test  
Annually – full three-hour duration test

- On installation a date will be randomly assigned for the first monthly and first annual test.
- The initial monthly test will be between 16 and 30 days from installation.
- The initial full-duration test will be between 200 and 360 days from installation (annual tests will then be conducted every 360 days).
- The schedule of these tests will be remembered for a period of 7 days if no power is supplied to the luminaire.
- If there is a mains failure in 24 hours before a test is due to be conducted, the test will automatically be postponed until sufficient time is allowed to recharge the battery.
- If there is a mains failure during the self-test operation the unit will go into emergency mode.

TESTING:

This product is designed to conduct self-testing in accordance with EN 62034, the results of monthly and annual tests should be endorsed on the test record form supplied.

Because of the possibility of a failure of the normal lighting supply occurring shortly after a period of testing of the emergency lighting system or during the subsequent recharge period, all full duration tests shall wherever possible be undertaken preceding time of low risk to allow for battery recharge.

**DAILY:**  
Visual inspection of the battery charge LED.

**EACH MONTH:**  
The product will be energised from its battery for adequate time to ensure that emergency mode is functioning correctly.

**ONCE EACH YEAR:**  
The product will be placed into emergency mode and check that the duration provided meets the specified time period.


PERFORMANCE AND FAULT INDICATORS:	
Normal operation	constant green LED
Duration test underway	red indicator flashing rapidly
Battery circuit failure	red indicator flashing once every 3 seconds
Light source failure	red indicator flashing twice every 3 seconds
Failure of duration test	red indicator flashing three times every 3 seconds
Auto test function fails	red indicator flashing four times every 3 seconds
LED indicator off	in emergency mode (mains failure)

# E02U01ES – PlugPack 3W Standard and Self-Test Switchable Emergency Module

## Step by step instructions


1

Turn off mains supply




2

Orientate the emergency pack to match the arrows on the PlugPack compatible fitting and click in

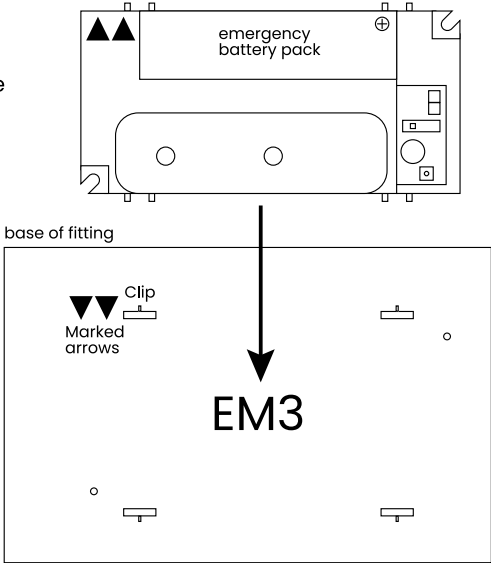


3

Plug the red and black cable into the socket on the driver

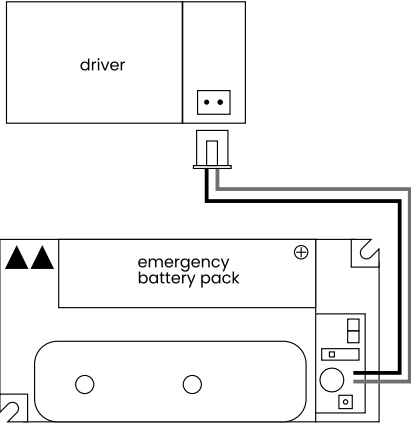


4

Connect the white emergency cable to the permanent live 'PL' plug from the terminal block

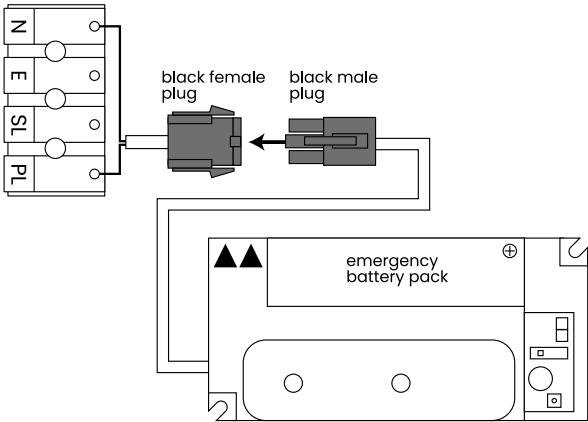

5

Connect battery and select standard or Self-Test

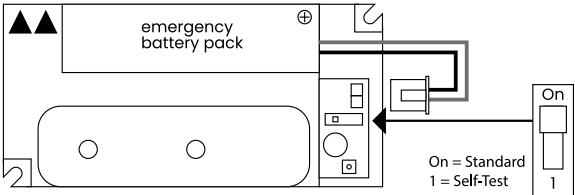

6

Depending on emergency mode, select relevant product label within packaging and position on the outside of the fitting

E02U01ES

This luminaire has been converted to Self-Test emergency

220-240VAC 50/60Hz

3.2V 1500mAh LiFePO4 Battery

TYPE	MODE	FACILITIES	DURATION
X	1	A	180


Eterna Lighting Ltd UK, NN8 5AB


Unit B40, Airport Business Park, Cloghran, Co. Dublin, Ireland, K67X 7H8

eterna.

www.eterna-lighting.co.uk


WW/YY





7

Turn on mains supply



PlugPack

Compatible

# INSTALLATION, MAINTENANCE AND OPERATION CHECK RECORD

Product Code:	Product Description:
Product Location:	
Installation Date:	Installation Test Duration:
Installed By:	

[illegible]

