



Gripple Suspension Kit Assembly

Instructions for High Bays

NET-46-16-06



Gripple Suspension Kit Components

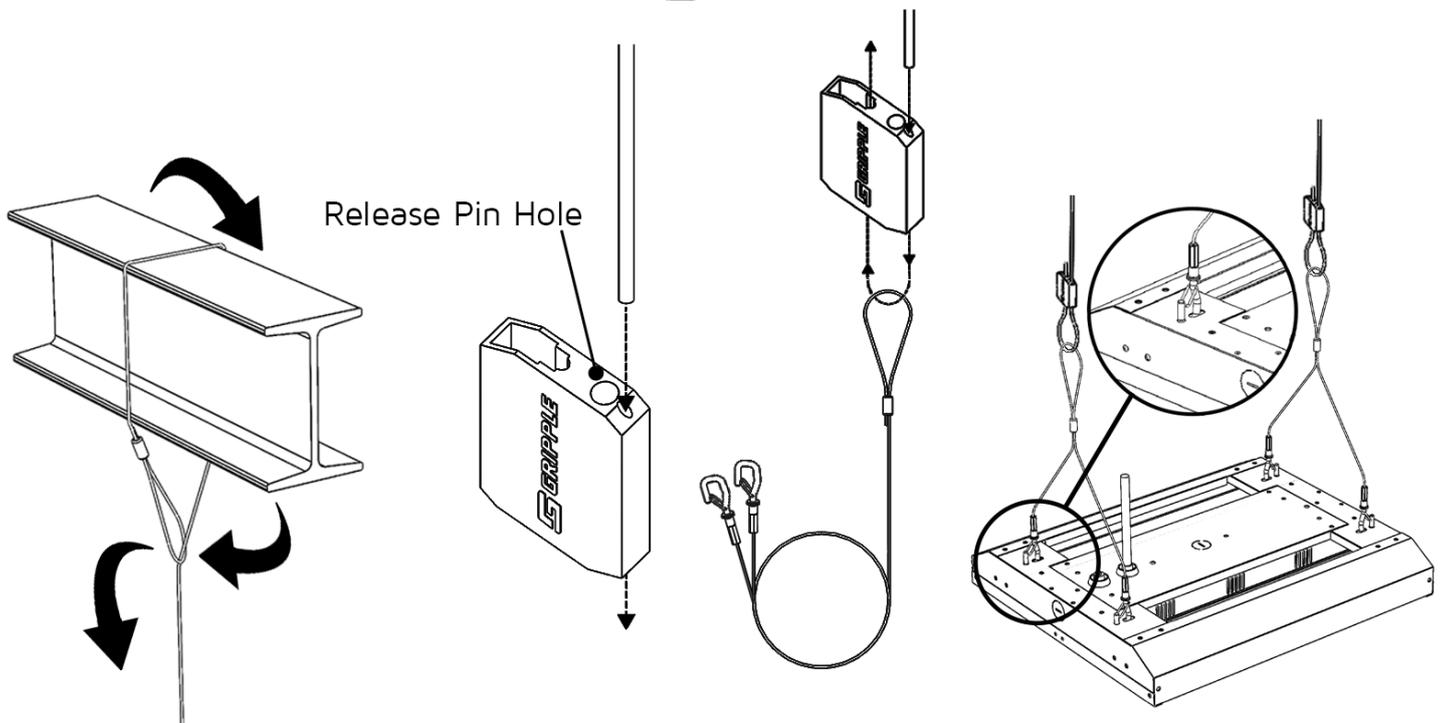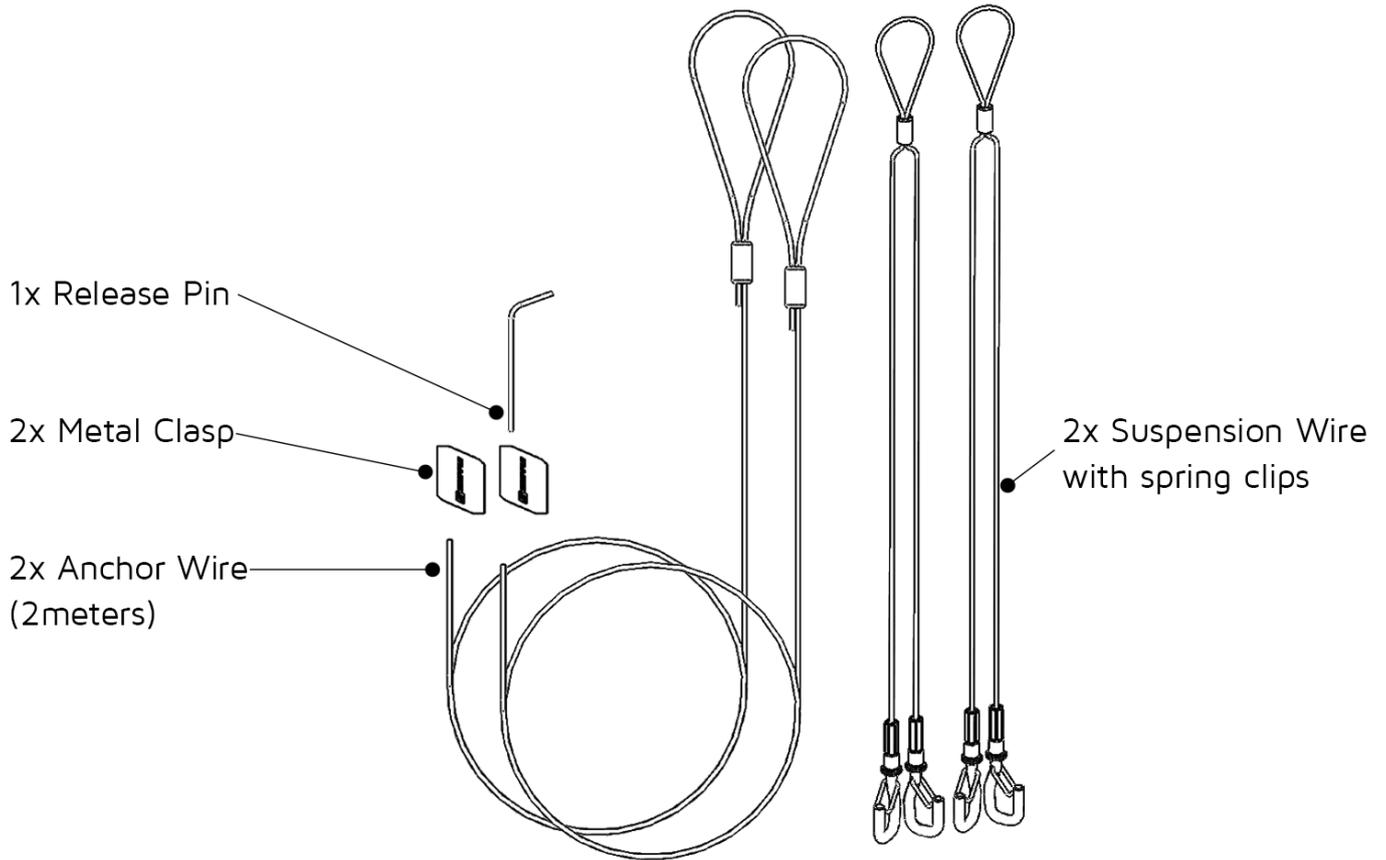

Step 1: Wrap Anchor Wire around mounting beam, then feed loose end through the wire loop and pull on the loose end to secure.

Step 2: Feed the anchor wire into the Metal Clasp, then feed the wire through the suspension wire loop. Insert Anchor Wire back into the Metal Clasp and pull upwards to adjust height of the Low Bay.

To release the Anchor Wire, insert the Release Pin into the Release Pin Hole, then feed the wire back through the Metal Clasp.