

Safety Information

>All electrical work must be undertaken by a qualified contractor to ensure compliance with latest edition BS7671 wiring regulations.


> Before installing an LED High Bay or doing any maintenance, ensure power supply is turned off at the circuit breaker or fuse box.

> This product is designed for permanent connection to fixed wiring; the circuit should be protected with the appropriate MCB or fuse.

Environment

>Please DO NOT dispose of electrical items or packaging as unsorted waste. Use the recycling facilities provided by your local authorities.

PRODUCT DIMENSIONS

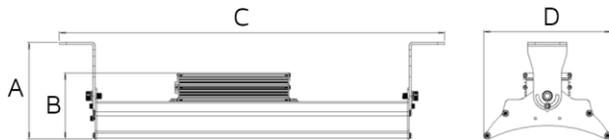

	A	B	C	D
150W	134	92	540	178

All units are in mm

Important Warranty Information

The Tri-colour Downlight has a 3 year warranty, which can be extended free of charge to 5 years by registering online via the website address below.

The registrant must provide the product part number and date of manufacture, which can be found on the label attached to the luminaire housing.



Certificate No. FS 590684



Certificate No. EMS 590685

NET LED Lighting
Buckingway Business Park
300 Anderson Road
Cambridge
CB24 4UQ
sales@netled.co.uk
www.netled.co.uk

Technical Helpline: 01223 851505
Email: support@netled.co.uk

www.netled.co.uk/downloads

Distributed by



LED LINEAR HIGH BAY INSTALLATION GUIDE

LED LINEAR HIGH BAY NET-23-12-XX

KEY DATA

NET-23-12-02	90W/120W/150W Burwell High Bay - STD
NET-23-12-04	90W/120W/150W Burwell High Bay - EM
NET-23-12-06	90W/120W/150W Burwell High Bay - MS
NET-23-12-08	90W/120W/150W Burwell High Bay - MS EM




SUPPLY/EARTH CLASS

100-270V AC 50/60 Hz
Mains Input Termination



Class I

Mains Input Termination

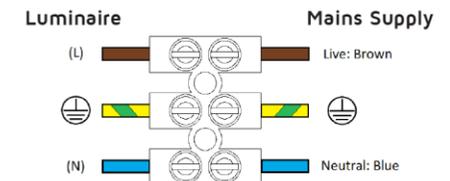

Installation procedure: Carefully read the instructions and ensure the mains supply is isolated before installation. Please follow the safety information overleaf before carrying out any installation. Please retain this leaflet for future reference.

Installation instructions for suspended use:




Non-replaceable light source




Replaceable control gear by a professional


Step 1: Drill two 10mm holes where Linear High Bay is going to be installed.

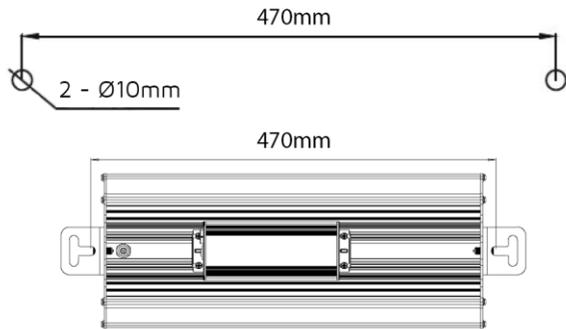


Step 2: Fix the expansion screws in the holes for the suspension kit. For surface mounting, proceed to Step 3.




Step 3: Connect the High Bay to the suspension kit; make sure the safety clip is closed. For surface mounting, align the Surface mount brackets with the screw holes drilled in Step 1. Insert the fixing screws to secure the High Bay.

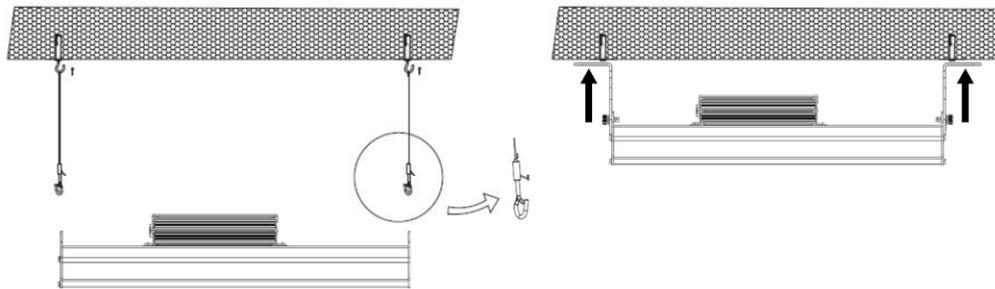

Step 4: Connect the driver to the power line according to the wiring diagram below.

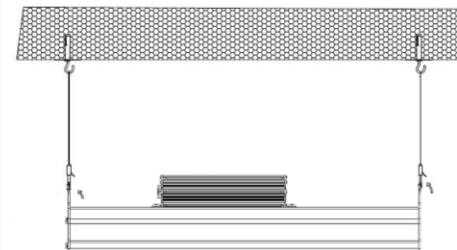

Mains Input Termination

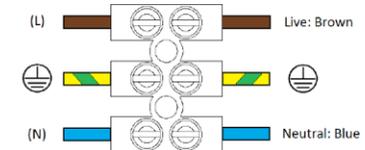

LED High Bays

Available in 100W, 150W & 200W, the Orwell Range of LED High Bays are dimmable (1-10V) as standard.



LED High Power Flood Lights

Available in 150W, 200W & 240W.



Full product range available

Visit www.netled.co.uk for more commercial LED lighting products, including:

Panel Lights, Downlights, T5 and T8 Tubes, Batten and Linear Luminaires, 2D Bulkheads and retrofit Gear Trays, Non-Corrosive Luminaires and much more.