

Installation Sheet

IMPORTANT INFORMATION




- It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies to the current IEE wiring regulations.
- These instructions should be read carefully and retained after installation for future reference and maintenance.
- Do not install this product on newly plastered surfaces.
- The LEDs in this wall light are not replaceable.
- Ensure all electrical connections are secure & that there are no loose strands.
- Clean this fitting with a soft damp cloth. Do not use any chemical or abrasive cleaners.
- This wall light is not dimmable.

PRODUCT SPECIFICATION

Electrical Classification: Class I


Voltage: 240V / 50Hz
Ingress Protection: IP54
Rated Wattage: 9W
Colour Temp.: 4000K
Lumens: 230lm
Lumens/Watt: 25.5lm/W

DIMENSIONS

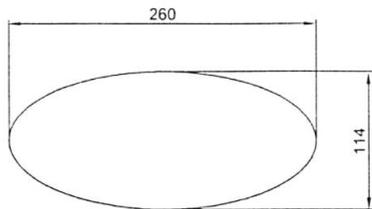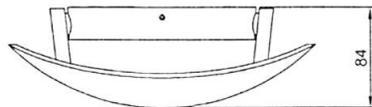

PART CODE: WLED12VP / WLED12VPWHT
DESCRIPTION: 9W LED Adjustable Wall Light
FINISH: Dark Grey or White

APPROVALS & CLASSIFICATIONS



Always switch off the mains supply before installation or servicing.

SUGGESTED METHOD OF INSTALLATION

Read Instructions and check you have all the tools and accessories to complete the installation correctly. Choose the desired position for your wall spot, before making any fixing holes check that there are no obstructions hidden beneath the mounting surface such as pipes or cables.

STEP 1

Isolate the mains power supply before making any electrical connections.

STEP 2

Remove the 2 grub screws securing the terminal housing back plate to terminal housing and remove back plate.

STEP 3

Feed mains cable through the grommet in the housing back plate.

STEP 4

Position and secure the back plate to a suitable solid surface, ensuring that the orientation is correct and using the fixings supplied.

STEP 5

Terminate the mains cable into the 3-way terminal block in the housing, ensuring that the correct polarity is observed.

STEP 6

Locate housing body onto back plate and secure in place with fixing screws removed in Step 2.

STEP 7

Restore the mains power supply, switch on and test for satisfactory operation.




This product may contain substances that can be hazardous to the environment if not disposed of properly. Electrical and electronic equipment should never be disposed of with general household waste but must be separated for its correct treatment and recovery. Where possible recycle your packaging.



CLASS I WIRING DETAILS

LUMINAIRE



THIS IS A CLASS I PRODUCT AND MUST BE EARTHED

