



211/INOX

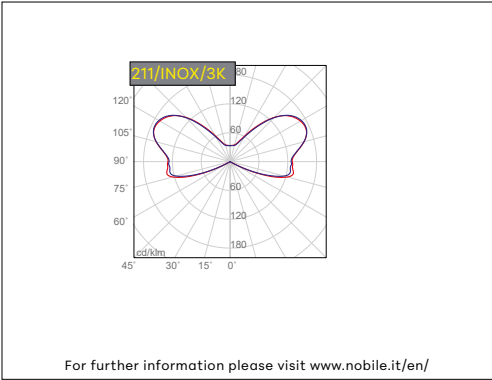

INGROUND GRAZING

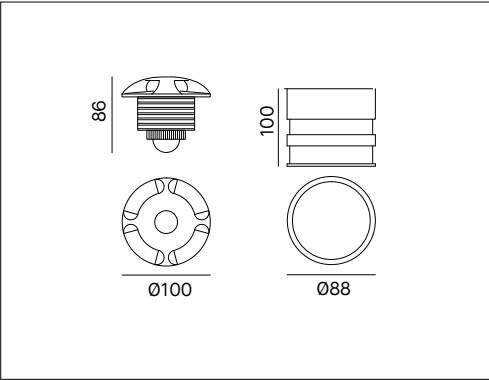

SPECIFICATION TEXT



Outdoor round LED inground for walk-over ground or floor installation (housing included) at 24Vdc. Quadruple 60° emission. Body and cover in stainless steel AISI316. IK10. IP65-IP67. Neoprene H05RN-F 2x1mm² cable of 1400mm. Diameter 100mm, height 86mm. Power supply not included.

Mounting	Product type	Outdoor quadruple emission inground	
	Installation type	Floor, ground	
Dimension	Diameter	100mm	
	Height	86mm	
	Cut out	89mm	
Lamp	LED	CREE	
	System/W	7.7W	
	Luminous flux nominal	211/INOX/3K	950lm
	Luminous flux real	211/INOX/3K	192lm
	Colour temperature CCT	3000K	
	Colour rendering index CRI	>80	
	LED Lifetime	50.000 h	
	MacAdam	3	
Light	Light beam	Quadruple 60° emission	
Material	Body	Stainless steel AISI 316	
	Cover	Stainless steel AISI 316	
	Cable	Neoprene H05RN-F 2x1mm² 1400mm	
	Housing	Aluminium, included - C/CASSA 211INOX to be ordered separately.	
IK	IK	10	
Electrical	Operating voltage	24Vdc	
Warranty	Warranty	3 years	
Norms	Norm compliance	EN60598-1, EN60598-2-13, EN61547, EN55015	