


221/R



DOWNLIGHT

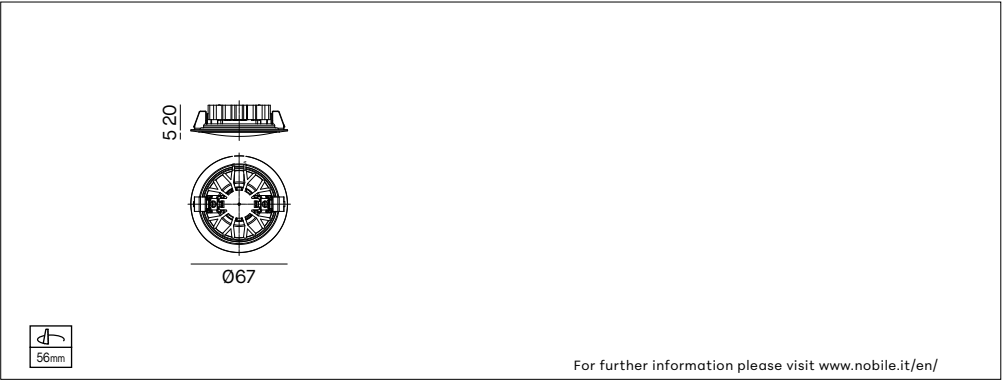

SPECIFICATION TEXT



Round recessed LED luminaire with fixed emission. Installation on metal surfaces height 0,5-1mm. Metal round frame. Available colours: white, gold, chrome, black. Aluminium heat sink. Diameter 67mm, height 25mm. IP20. 350mA. Power supply not included.

Mounting	Product type	Downlight	
	Installation type	Ceiling recessed-mounted	
Dimension	Diameter	67mm	
	Height	25mm	
	Cut out	56mm	
Lamp	LED	Bridgelux	
	LED/W	3.5W	
	Luminous flux nominal	221/R/3K/_	348lm
	Colour temperature CCT	3000K	
	Colour rendering index IRC	>80	
Light	LED Lifetime	50.000 h	
	Light distribution	Direct	
	Light beam	40°	
Material	Frame	Metal	
	Colour	White BI, gold GD, chrome CR, black NE	
	Heat sink	Aluminium	
Electrical	LED current	350mA	
Warranty	Warranty	2 years	
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015	

CODE CONFIGURATION

221/R	/	*	*	/	*	*
		1			2	
1	Colour temperature	3K = 3000K;				
2	Colour	BI = white; GD = gold; CR = chrome; NE = black				