

241/AS

WALL-RECESSED LUMINAIRE, ASYMMETRIC

For further information please visit www.nobile.it/en/

SPECIFICATION TEXT




Rectangular LED luminaire for wall-recessed installation. Asymmetric emission. White-painted aluminium body. Satin-finished tempered grey silk-screened glass diffuser. IP65. Reduced dimensions: front 85x110mm, depth 52mm. Coloured surface-mounting kit available as accessories (white, grey, anthracite). Neoprene H05RN-F 3x1mm² cable of 500mm. 220-240V - 50/60Hz power supply included.

Mounting	Product type	Wall-recessed luminaire, asymmetric			
	Installation type	Wall-recessed			
Dimension	Frame	85x110mm			
	Width	52mm			
Lamp	LED	Osram			
	System/W	5.4W			
	Luminous flux nominal	241/AS/3K	430lm	241/AS/4K	470lm
	Luminous flux real	241/AS/3K	90lm	241/AS/4K	98lm
	Colour temperature CCT	3000K, 4000K			
	Colour rendering index CRI	>80			
	LED Lifetime	50.000 h			
	MacAdam	3			
Light	Light distribution	Asymmetric			
Material	Body	White-painted aluminium			
	Diffuser	Satin-finished tempered grey silk-screened glass			
	Screws	Inox			
	Cable	Neoprene H05RN-F 3x1mm² 500mm			
	Housing	Steel, included C/CASSA x 241			
IK	IK	03			
Electrical	Operating voltage	220-240V 50-60Hz power supply included			
Warranty	Warranty	3 years			
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN61000-3-3, EN61000-3-2, EN61547, EN55015			

CODE CONFIGURATION

241	/	AS	/	*	*
1	Colour temperature		3K = 3000K; 4K = 4000K.		

ACCESSORIES UPON REQUEST

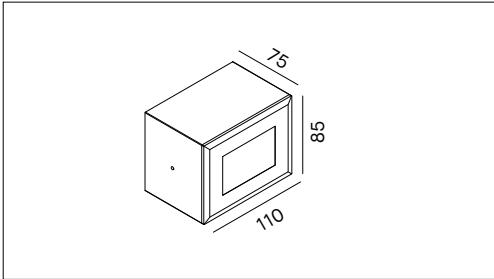

KIT/241/_

Accessory for wall installation. White, grey or anthracite painted die-cast aluminium body. LED fitting 241 to be ordered separately.