


LEDEP10EM

Manual Test Emergency Converter

Installation instructions



collingwood

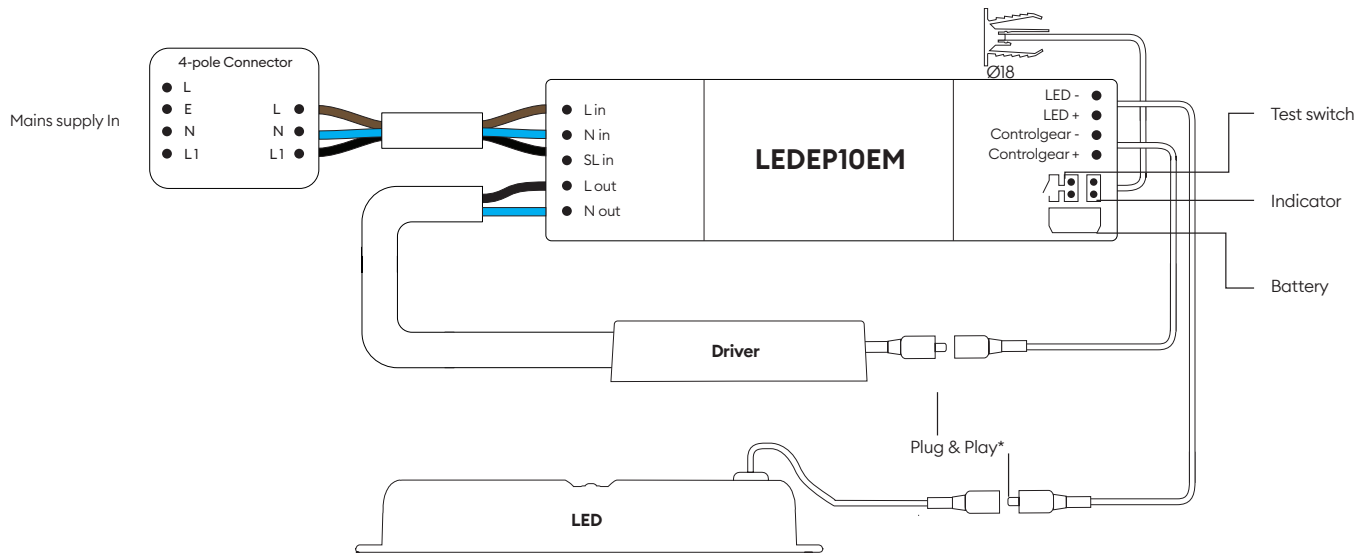

* Make sure plug & play connectors polarity matches the products you are installing

en

Installation

1. Refer to the LED unit installation instructions and install all non-emergency LED units.
2. For each emergency light position, drill 18mm hole for LED indicator close to the LED unit hole.
3. Drill 7mm hole for test button (optional).
4. Connect plug and play connectors to the corresponding connectors of the LED unit and LED driver.
5. Connect input of the LED driver to the LEDEP10EM output (LED+, LED-)
6. Connect the mains supply to the 4pole connector. L in = unswitched Live, N in = Neutral, E = Earth, SL in /L1= Switched Live
7. Fit cable clamps to secure the wires.
8. Connect the battery and write installation date on the battery. Battery is installed in the emergency pack housing, to remove it open the end cover and pull the battery.
9. Feed the junction boxes/connectors and LEDEP10EM through the ceiling hole.
10. Fit the indicator housing to the indicator LED, then press the housing into the ceiling.
Note: If the drilled hole is slightly larger than 18mm, it may be necessary to apply a little adhesive to the housing to secure it.
11. Fit the LED unit into the ceiling.
12. See section emergency pack commissioning.

Note: In order to keep 3h time duration do not change the output power jumper.

Installation data

- Isolate the mains supply, prior to wiring.
- This unit must be wired by a qualified electrician or suitable competent person.
- Do not cover emergency pack with insulation
- Use only with LED modules
- Input Voltage 220-240V AC 50/60Hz
- Battery must be replaced when the unit no longer meets it's rated emergency duration, or if a battery fault occurs. Contact Collingwood Lighting for a suitable replacement.

Emergency pack commissioning

1. Provide an uninterrupted mains power supply (permanent live) for 24 hours.
2. Check that the green indicator LED light is lit, this confirms that the battery is charging.
3. The building owner/operator must cut off the permanent live in order to perform the 3 hour duration test.
4. After a successful duration test, the green LED will be flashing for 5 days, allowing the user to acknowledge it.



5 year warranty



Disposal of this product should be separate from household waste. Please separate these items from other types of waste and recycle them responsibly to promote the sustainable reuse of material resource. Household users should contact their local government office for details of where and how they can take these items for environmentally safe recycling.

LEDEP10EM

Manual Test Emergency Converter

Installation instructions



collingwood

en

Testing

Periodic testing of the unit must be performed in line with the appropriate regulations.

LED indicator status

LED indicator status	Comment
Green LED on	Product connected and functioning correctly
Green LED flashing (approx. 0.25s interval)	Functional test in progress
Green LED flashing (approx. 1s interval)	Successful duration test - flashing for 5 days Duration test in progress
Red LED on	LED unit failure
Red LED flashing (approx. 0.25s interval)	Battery duration test failure
Red LED flashing (approx. 1s interval)	Battery fault – short circuit, open circuit, incorrect battery voltage



5 year warranty



Disposal of this product should be separate from household waste. Please separate these items from other types of waste and recycle them responsibly to promote the sustainable reuse of material resource. Household users should contact their local government office for details of where and how they can take these items for environmentally safe recycling.

LEDEP10EM

Manual Test Emergency Converter

Installation instructions



collingwood

en

Emergency installation and maintenance record

Product : _____

Installer : _____

Date installed : _____

Commissioning by : _____

Date commissioned : _____

Month	Year 1		Year 2		Year 3		Year 4		Year 5	
	Signed	Date	Signed	Date	Signed	Date	Signed	Date	Signed	Date
1										
2										
3										
4										
5										
6										
7										
8										
9										
10										
11										
12										



5 year warranty



Disposal of this product should be separate from household waste. Please separate these items from other types of waste and recycle them responsibly to promote the sustainable reuse of material resource. Household users should contact their local government office for details of where and how they can take these items for environmentally safe recycling.