

241/G

WALL-RECESSED LUMINAIRE

For further information please visit www.nobile.it/en/

SPECIFICATION TEXT




Rectangular LED luminaire for wall-recessed installation. Diffuse emission. White-painted aluminium body. Satin-finished tempered grey silk-screened glass diffuser. IP65. Reduced dimensions: front 85x190mm, depth 52mm. Coloured surface-mounting kit available as accessories (white, grey, anthracite). Neoprene H05RN-F 3x1mm² cable of 500mm. 220-240V - 50/60Hz power supply included

Mounting	Product type	Wall-recessed luminaire			
	Installation type	Wall-recessed			
Dimension	Frame	85x190mm			
	Width	52mm			
Lamp	LED	Osram			
	System/W	8W			
	Luminous flux nominal	241/G/3K	1200lm	241/G/4K	1350lm
	Luminous flux real	241/G/3K	812lm	241/G/4K	914lm
	Colour temperature CCT	3000K, 4000K			
	Colour rendering index CRI	>80			
	LED Lifetime	50.000 h			
	MacAdam	3			
Light	Light distribution	Diffuse			
Material	Body	White-painted aluminium			
	Diffuser	Satin-finished tempered grey silk-screened glass			
	Screws	Inox			
	Cable	Neoprene H05RN-F 3x1mm² 500mm			
	Housing	Steel, included C/CASSA x 241/G			
IK	IK	03			
Electrical	Operating voltage	220-240V 50-60Hz power supply included			
Warranty	Warranty	3 years			
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN61000-3-3, EN61000-3-2, EN61547, EN55015			

CODE CONFIGURATION

241	/	G	/	*	*
1	Colour temperature		3K = 3000K; 4K = 4000K.		1

ACCESSORIES UPON REQUEST

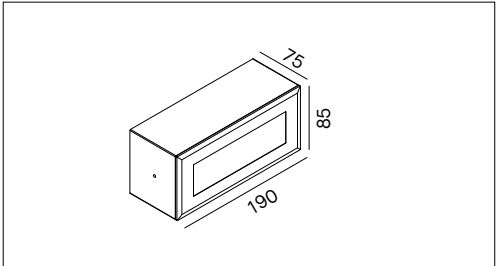

KIT/241/G/_

Accessory for wall installation. White, grey or anthracite painted die-cast aluminium body. LED fitting 241/G to be ordered separately.