


Installation Instructions

Instrucciones de instalación, Instructions d'installation, Installationsanleitung, إرشادات التركيب, Installatie-instructies, Instruções de instalação, Installatie-instructies, 設置手順説明, Οδηγίες εγκατάστασης



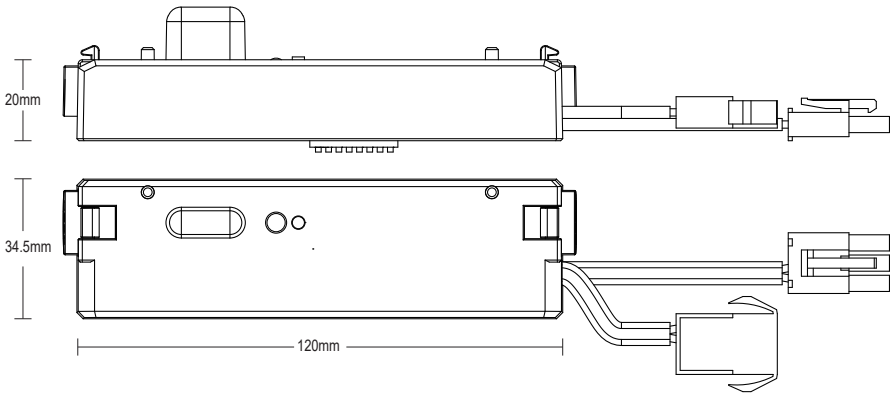
Master
Translations
QR Link



Product Code:[AXPL/MWS/1]


1

DIMENSION



2

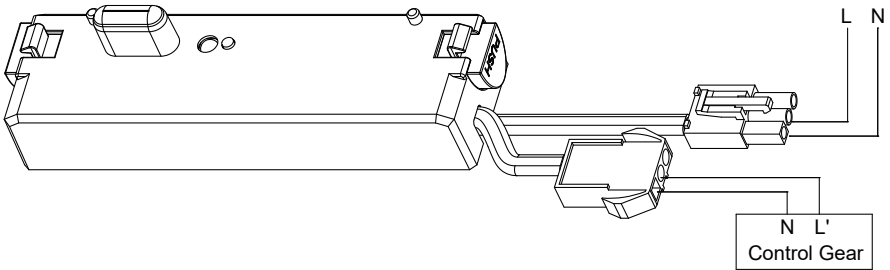WIRING



Ansell Electrical Products
Unit 6B, Stonecross Industrial
Park,
Yew Tree Way,
Warrington,
WA3 3JD

Ansell (Sales & Distribution)
Unit 2, M2 Business Park,
Duncrue Street,
Belfast,
BT3 9AQ

Ansell (Sales & Distribution) Republic of Ireland Limited
Unit G1, Block G,
Calmount Park, Ballymount
Dublin 12,
D12 TH56

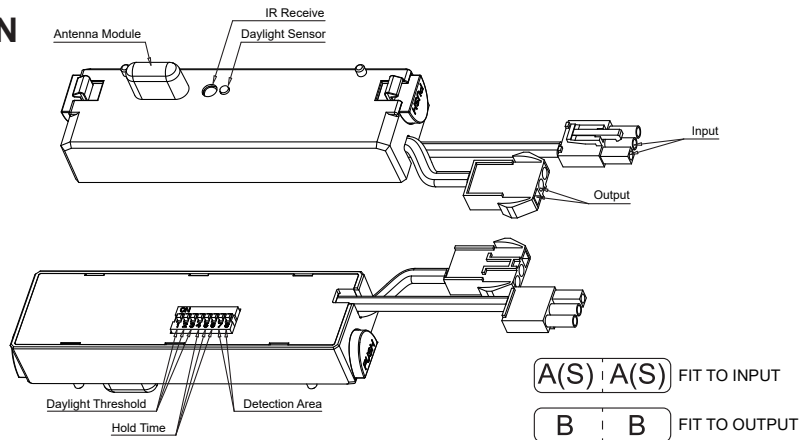
www.ansell-lighting.com

Warrington Tel: +44 (0)1942 433333 Belfast Tel: +44 (0)2890 773750 International Tel: +44 (0)1942 433343 Spain Tel: 00 34 938 005642

Issue Number: [1]

3

FUNCTION



4

SPECIFICATIONS

Code	AXPL/MWS/1
Rated Voltage	220-240V AC, 50/60Hz
Stand-by Power	≤0.5W
Working Frequency	5.8 GHz ±75MHz, ISM wave band
Transmitting Power	1mW Max.
Surge Test	1KV(L/N,EN61000-4-5)
Output Signal	ON/OFF
Load Capacity	200W@230Vac(Inductive) ; 400W@230Vac(Resistive)
Max. Surge Capacity	7A relay 20A(50% Ipeak, width =200uS, 230Vac full load, cold start);
Detection Area(Radius)	Ceiling mounting height 3m: r24m@0.3m/s, r22.5m@1m/s; Wall mounting height 3m: r25m@0.3m/s, r24m@1m/s Test condition: Set 100% sensitivity, open 60 m² indoor area.
Mounting Height	3m (6m Max)
Hold time	5s/30s/90s/5min/20min/30min (Dial code)
Detection Area	100%/75%/50%/25%
Daylight Sensor	2Lux/10Lux/30Lux/50Lux/Disable
Operating Temperature	-25°C~60°C, Humidity: 85% (Non-condensing)
Storage Temperature	-40°C~80°C, Humidity: 85% (Non-condensing)
Dimension	160*79*26mm
Certification	CE
Installation	Built-in
IP Rating	IP20
Warranty	5 years @Ta full load

Daylight Sensor

1	2	3		ON
ON	ON	ON	2Lux	↑
–	ON	ON	10Lux	
–	ON	–	30Lux	
–	–	ON	50Lux	
–	–	–	Disable	

Hold Time

4	5	6		ON
ON	ON	ON	5s	↑
ON	ON	–	30s	
ON	–	ON	90s	
ON	–	–	5min	
–	ON	ON	20min	
–	–	–	30min	

Detection Area

7	8		ON
ON	ON	100%	↑
ON	–	75%	
–	ON	50%	
–	–	25%	

Daylight Sensor can be pre-set using dip switches 1, 2 & 3. Light will always turn on upon movement if daylight sensor is disabled.

Hold time refers to the time period that the light remains on if no more movement is detected. Set using dip switches 4, 5 & 6.

Detection Area can be adjusted by selecting the required combination on dip switches 7 & 8 for different applications.

Ansell Electrical Products
Unit 6B, Stonecross Industrial
Park,
Yew Tree Way,
Warrington,
WA3 3JD

Ansell (Sales & Distribution)
Unit 2, M2 Business Park,
Duncrue Street,
Belfast,
BT3 9AQ

Ansell (Sales & Distribution) Republic of Ireland Limited
Unit G1, Block G,
Calmount Park, Ballymount
Dublin 12,
D12 TH56

www.ansell-lighting.com

Warrington Tel: +44 (0)1942 433333 Belfast Tel: +44 (0)2890 773750 International Tel: +44 (0)1942 433343 Spain Tel: 00 34 938 005642

Issue Number: [1]

Installation Instructions

Instrucciones de instalación, Instructions d'installation, Installationsanleitung, إرشادات التركيب


Installatie-instructies, Instruções de instalação, Installatie-instructies,








設置手順説明, Οδηγίες εγκατάστασης

Product Code:[AZH/RP/1]



Master
Translations
QR Link



Remote Control Setting	Button	Remarks
		Press the "ON/OFF" button, the light goes to constant on/off mode, sensor is disabled. Press "Sensor motion" button to quit from this mode and the sensor starts to work. The button have power-off memory function.
		Press "Reset" button, all parameters are same as setting of DIP switch or factory settings.
		Press "Sensor motion" button, the light quits from the constant on/off mode, and the sensor starts to work (The latest setting stays in validity)
		N/A
		N/A
		N/A
		N/A
		N/A
		Daylight Sensor Set up daylight threshold: 5Lux/15Lux/30Lux/50Lux/100Lux/150Lux/ Disable
		N/A
		Hold time Set up hold time: 5s/30s/1min/3min/5min/10min/20min/30min
		N/A
		Detection Area Set up detection area: 25%/50%/75%/100%
		Remote Distance Toggle button can set the remote distance of remote control and sensor.

Ansell Electrical Products
Unit 6B, Stonecross Industrial
Park,
Yew Tree Way,
Warrington,
WA3 3JD

Ansell (Sales & Distribution)
Unit 2, M2 Business Park,
Duncrue Street,
Belfast,
BT3 9AQ

Ansell (Sales & Distribution) Republic of Ireland Limited
Unit G1, Block G,
Calmount Park, Ballymount
Dublin 12,
D12 TH56

www.ansell-lighting.com

Warrington Tel: +44 (0)1942 433333 Belfast Tel: +44 (0)2890 773750 International Tel: +44 (0)1942 433343 Spain Tel: 00 34 938 005642