



9098



PLASTER DOWNLIGHT

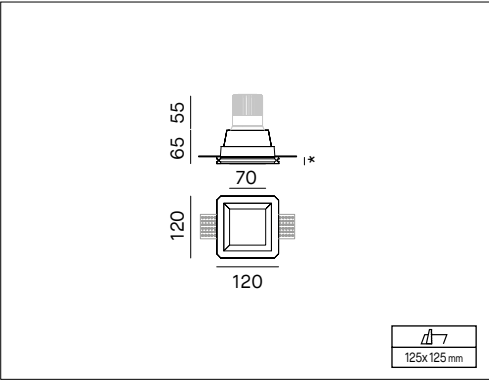

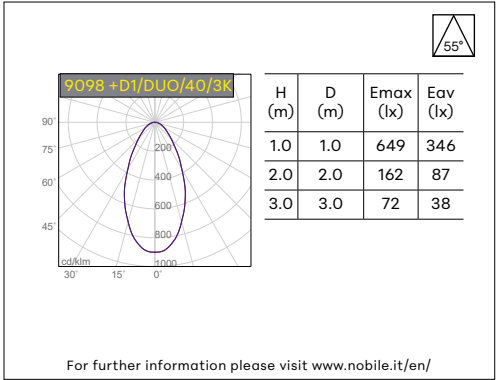

SPECIFICATION TEXT

IP20

CE

Plaster square frame for recessed-mounted trimless installation in plasterboard ceiling from 6 to 15mm height. Fixed emission. Trimless effect. Acid-etched glass diffuser. IP20. GU10 lamp holder included, suitable for LED lamp max 8W, not included. Dimensions: 120x120mm, height 65mm. Suitable for IP64 LED module, to be ordered separately.

Mounting	Product type	Plaster downlight
	Installation type	Recessed-mounted in plasterboard ceiling
Dimension	Diameter	120x120mm
	Height	65mm
	Cut-out	125x125mm
Lamp	Lamp LED	max 8W, not included
	Module LED	D1/DUO IP64 to be ordered separately
Material	Body	Plaster
	Diffuser	Acid-etched glass
	Bracket	Aluminium
	Screws	Steel
Accessories	Included	Lamp holder GU10
		Adjustable bracket according to the ceiling thickness - variable dimension from 6 to 15mm (*)
Warranty	Warranty	2 years
Norms	Norm compliance	EN60598-1, EN60598-2-2

LED MODULE AVAILABLE

Code ON-OFF driver	Code PUSH driver	Code DALI driver	Nominal/lm	LED/W	System/W	CCT	Beam
D1/DUO/20/2K/6	D1/DUO/20/2K/2P	D1/DUO/20/2K/3	840	8.5	9.5	2700K	20°
D1/DUO/20/3K/6	D1/DUO/20/3K/2P	D1/DUO/20/3K/3	890	8.5	9.5	3000K	20°
D1/DUO/20/4K/6	D1/DUO/20/4K/2P	D1/DUO/20/4K/3	960	8.5	9.5	4000K	20°
D1/DUO/40/2K/6	D1/DUO/40/2K/2P	D1/DUO/40/2K/3	840	8.5	9.5	2700K	40°
D1/DUO/40/3K/6	D1/DUO/40/3K/2P	D1/DUO/40/3K/3	890	8.5	9.5	3000K	40°
D1/DUO/40/4K/6	D1/DUO/40/4K/2P	D1/DUO/40/4K/3	960	8.5	9.5	4000K	40°
D1/DUO/55/2K/6	D1/DUO/55/2K/2P	D1/DUO/55/2K/3	840	8.5	9.5	2700K	55°
D1/DUO/55/3K/6	D1/DUO/55/3K/2P	D1/DUO/55/3K/3	890	8.5	9.5	3000K	55°
D1/DUO/55/4K/6	D1/DUO/55/4K/2P	D1/DUO/55/4K/3	960	8.5	9.5	4000K	55°



LED CREE
Lifetime 50.000h (L80B10). Module in anodized aluminium.
Module LED IP64.
Lens 20° in polycarbonate, 40° and 55° in PMMA.
ON-OFF driver included.