

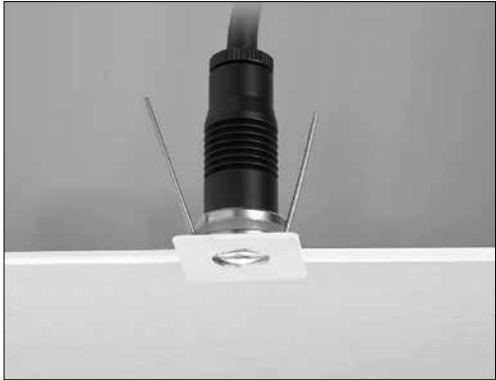


91000 ALU

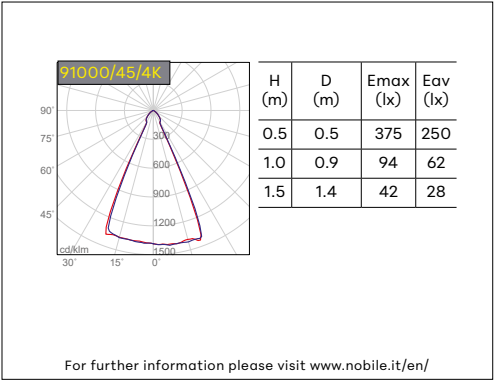

MINI RECESSED

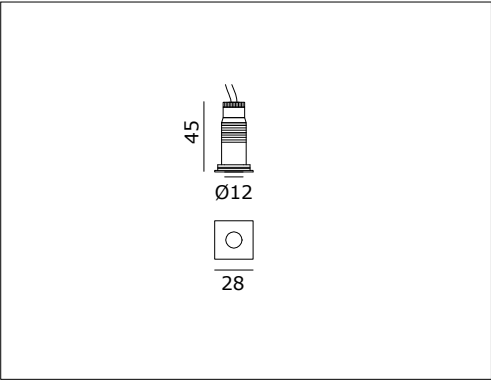

SPECIFICATION TEXT



Outdoor square LED luminaire for ceiling and wall installation at 350mA. Fixed emission 45°. Black anodized aluminium body. White or black painted aluminium frame. Methacrylate lens. IP65. Neoprene H05RN-F 2x0,75mm² cable of 500mm. Reduced dimensions: frame 28x28mm, height 45mm. Power supply not included.

Mounting	Product type	Outdoor recessed			
	Installation type	Ceiling, wall			
Dimension	Frame	28x28mm			
	Height	45mm			
	Cut out	25mm			
Lamp	LED	OSRAM			
	System/W	1W			
	Luminous flux nominal	91000/45/3K/_	120lm	91000/45/4K/_	140lm
	Luminous flux real	91000/45/3K/_	57lm	91000/45/4K/_	67lm
	Colour temperature CCT	3000K, 4000K			
	Colour rendering index CRI	>80			
	LED Lifetime	50.000 h			
	MacAdam	3			
Light	Light distribution	Direct			
	Light beam	45°			
Material	Body	Black anodized aluminium			
	Frame	Aluminium painted white (W) or black (B)			
	Diffuser	Methacrylate lens			
	Cable	Neoprene H05RN-F 2x0.75mm² 500mm			
Electrical	Operating voltage	350mA			
Warranty	Warranty	3 years			
Norms	Norm compliance	EN60598-1, EN60598-2-13, EN61547, EN55015			

CODE CONFIGURATION

91000	/	45	/	*	*	/	*
				1			2
1	Colour temperature		3K = 3000K; 4K = 4000K.				
2	Colour		B= black; W= white.				