


LED LAMP SPECIFICATIONS:	CIROPAL	CIRPRIS	SQOPAL	SQPRIS
Luminaire lumens (with diffuser)	<b>1600 lm</b>	<b>1710 lm</b>	<b>1610 lm</b>	<b>1720 lm</b>
Lumens from chip (no diffuser)	<b>1810 lm</b>	<b>1810 lm</b>	<b>1845 lm</b>	<b>1845 lm</b>
Useful lumens	<b>1540 lm</b>	<b>1650 lm</b>	<b>1555 lm</b>	<b>1600 lm</b>
Rated Wattage	15W	15W	15W	15W
Rated luminous flux	1540 lm	1650 lm	1555 lm	1600 lm
Nominal life time of the lamp	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs
Colour temperature	4000K	4000K	4000K	4000K
Number of switching cycles before premature lamp failure	≥15,000	≥15,000	≥15,000	≥15,000
Warm-up time up to 60% of the full light output	Instant full light	Instant full light	Instant full light	Instant full light
Dimmable	No	No	No	No
Nominal beam angle	120°	120°	120°	120°
Rated power	15W	15W	15W	15W
Rated lamp lifetime	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs
Displacement factor	≥0.9	≥0.9	≥0.9	≥0.9
Lumen maintenance factor at end of nominal life	≥0.8	≥0.8	≥0.8	≥0.8
Starting time	Instant full light	Instant full light	Instant full light	Instant full light
Colour rendering	≥80	≥80	≥80	≥80
Colour consistency	Within a six step Macadam ellipse	Within a six step Macadam ellipse	Within a six step Macadam ellipse	Within a six step Macadam ellipse
Rated peak intensity	395cd	429cd	398cd	432cd
Rated beam angle	120°	120°	120°	120°
Voltage / Frequency	240V~50Hz	240V~50Hz	240V~50Hz	240V~50Hz
Lumen efficacy	106 lm / W	114 lm / W	123 lm / W	114 lm / W
This product contains a Light Source of Energy Efficiency Class E				
Not suitable for accent lighting				



See website for more information on  
replacability and recycling

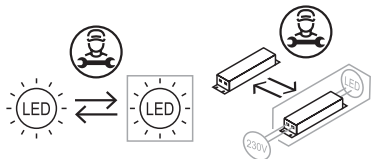

Email: [sales@eterna-lighting.co.uk](mailto:sales@eterna-lighting.co.uk) / [technical@eterna-lighting.co.uk](mailto:technical@eterna-lighting.co.uk)

Visit our website: [www.eterna-lighting.co.uk](http://www.eterna-lighting.co.uk)

Made in China

## INSTALLATION INSTRUCTIONS

**A guide for qualified electricians**



### Pack contents:

1 x Base  
1 x Diffuser

Model:

**SQPRISSTD / SQOPALSTD**  
**CIRPRISSTD / CIROPALSTD**

**IP65 LED Utility Fitting**

These instructions are provided as a guideline to assist you.

**PLEASE READ THESE INSTRUCTIONS BEFORE INSTALLATION  
AND RETAIN FOR FUTURE REFERENCE**

## READ THIS FIRST:

Check the pack and make sure you have all of the parts listed on the front of this booklet. If not, contact the outlet where you bought this product.

This product must be installed by a competent person in accordance with the current building and IEE wiring regulations.

As the buyer, installer and/or user of this product it is your own responsibility to ensure that this fitting is fit for the purpose for which you have intended it. Eterna Lighting cannot accept any liability for loss, damage or premature failure resulting from inappropriate use.

This product is designed and constructed according to the principles of the appropriate British Standard and is intended for normal domestic service. Using this fitting in any other environments may result in a shortened working life, for example where there is prolonged periods of use or higher than normal ambient temperatures such as lighting public or shared spaces or in nursing /care home facilities.

Switch off the mains before commencing installation and remove the appropriate circuit fuse or lock off MCB.

Suitable for outdoor use.

This product is suitable for use in living areas, and Bathroom Zone 2 and outsidess of zones.

**If being fitted in a bathroom a 30mA RCD must be used.**

The chosen location of your new fitting should allow for the product to be securely mounted (e.g. to a ceiling joist) and safely connected to the mains supply (lighting circuit).

When making connections ensure that the terminals are tightened securely and that no strands of wire protrude. Check that the terminals are tightened onto the bared conductors and not onto any insulation.

This product must be connected to earth termination.

This product is not intended to be used by children and persons with sensory, physical and/or mental impairments that would prevent them from using it safely.

You are advised at every stage of your installation to double-check any electrical connections you have made. After you have completed your installation there are electrical tests that should be carried out, these tests are specified in the current IEE wiring and building regulations.

## INSTALLATION:

Choose the location for your new fitting according to the conditions listed opposite.

- 01) Unscrew gear tray screw and allow the gear tray to rest on its hinge.
- 02) Drill holes in the back of your fitting for your fixing screws, take care and drill gently to ensure a clean hole through. Use a drill bit sized appropriately to your fixing screws (not supplied).
- 03) Using the back of your fitting as a template, mark the position of your fixing holes on your mounting surface.
- 04) Prepare the holes in your mounting surface as appropriate for your fixings.
- 05) Pierce the rubber grommet in the back of your fitting making a hole just large enough to make a tight fit around the incoming mains cable.
- 06) Thread the cable through the grommet and offer the fitting to the ceiling / wall.
- 07) Secure the fitting in place. Note, if protection against ingress of moisture is required, the heads of screws must be covered with a silicone or similar sealant.
- 08) Check that the grommet is still correctly fitted in the cable entry hole and around the incoming cable.
- 09) Make the electrical connections according to the symbols, adjacent to the connector block, Brown to live (L) Blue to neutral (N) and earth green & yellow (E).
- 10) Offer the diffuser onto the top of the fitting and secure in place.
- 11) Restore the power and switch on.

## EVENTUALLY, YOU MAY WANT TO REPLACE THIS PRODUCT:

Regulations require the recycling of Waste from Electrical and Electronic Equipment (European “WEEE Directive” effective August 2005—UK WEEE Regulations effective 2nd January 2007). Environment Agency Registered Producer: WEE/ GA0248QZ.

WHEN YOUR PRODUCT COMES TO THE END OF ITS LIFE OR YOU CHOOSE TO REPLACE IT, PLEASE RECYCLE IT WHERE FACILITIES EXIST - DO NOT DISPOSE WITH HOUSEHOLD WASTE.


## CLEANING:

Clean this fitting only with a soft dry cloth.

Do not use any chemical or abrasive cleaners.

## IF YOU EXPERIENCE PROBLEMS:

If you believe your product is defective, please return it to the place where you bought it. Our Technical Team will gladly advise on any Eterna Lighting product, but may not be able to give specific instructions regarding individual installations.

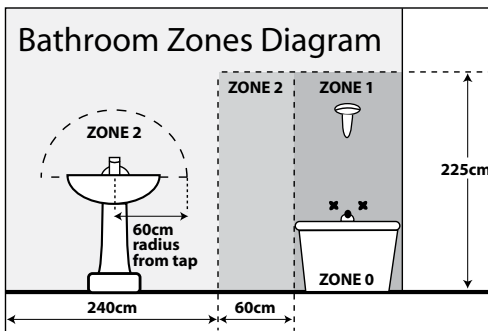

This product is designed for permanent connection to fixed wiring: this must be a suitable circuit (protected with the appropriate MCB or fuse).

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard and masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

Before making fixing hole(s), check that there are no obstructions hidden beneath the mounting surface such as pipes or cables.

## LAMP REPLACEMENT:

**The light source is designed to last the lifetime of the luminaire.**

The light source contained in this luminaire shall only be replaced by the manufacturer, service agent or a similar qualified person.

**CAUTION, RISK OF ELECTRIC SHOCK.**

