

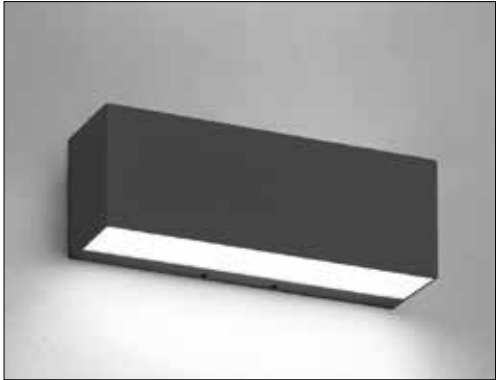


BRIK - BA30/1A

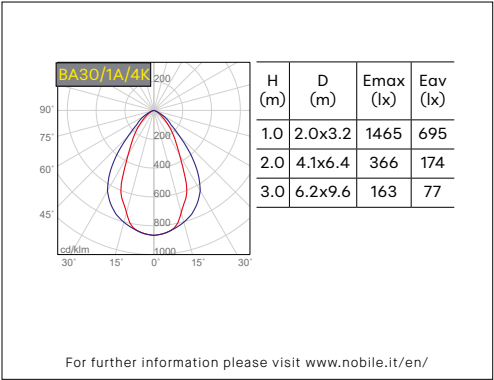

WALL MONO-EMISSION

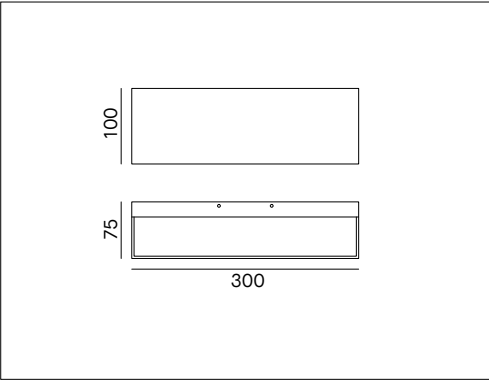

SPECIFICATION TEXT



Rectangular outdoor LED luminaire for wall-mounted installation. Triac dimmable LED. Mono-emission lighting, 80°x60° light beam. Die-cast aluminium body, copper free, painted white (RAL9003), grey (RAL9006), anthracite (RAL7016) or dark brown. Transparent glass with micro-prismatic diffuser. IK06. IP65. Wall base including plug and play terminal block. Stainless steel screws. Reduced dimensions: length 300mm, depth 75mm, height 100mm. 220-240V dimmable LED board.

Mounting	Product type	Outdoor wall-mounted luminaire			
	Installation type	Wall-mounted			
Dimension	Body	100x300mm			
	Width	75mm			
Lamp	LED	SAMSUNG			
	System/W	25W			
	Luminous flux nominal	BA30/1A/3K/_	2800lm	BA30/1A/4K/_	3000lm
	Luminous flux real	BA30/1A/3K/_	1580lm	BA30/1A/4K/_	1690lm
	Colour temperature CCT	3000K, 4000K			
	Colour rendering index CRI	>80			
	LED Lifetime	36.000 h			
Light	Light distribution	Direct mono-emission			
	Light beam	80x60°			
Material	Body	Die-cast aluminium body, copper free			
	Colour	A= anthracite RAL7016, G= grey RAL9006, W= white RAL9003, BR= dark brown			
	Diffuser	Transparent glass with micro-prismatic diffuser			
	Screws	Steel			
IK	IK	06			
Electrical	Operating voltage	220-240V 50-60Hz dimmable LED board			
Warranty	Warranty	3 years			
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN61000-3-3, EN61000-3-2, EN61547, EN55015			

CODE CONFIGURATION

BA30	/	1A	/	*	*	/	*
1	Colour temperature		3K = 3000K; 4K = 4000K.		1		2
2	Colour		A= anthracite; G= grey; W= white; BR= dark brown				