




Scan QR code
to go to web page

eterna.


INSTALLATION INSTRUCTIONS

Suta

E11SUDGB	Suta 4W IP65 CCT Direct Surface Guide Light Black
E11SUDGG	Suta 4W IP65 CCT Direct Surface Guide Light Grey
E11SUDGW	Suta 4W IP65 CCT Direct Surface Guide Light White
E11SULGB	Suta 2W IP65 CCT Low Glare Surface Guide Light Black
E11SULGG	Suta 2W IP65 CCT Low Glare Surface Guide Light Grey
E11SULGW	Suta 2W IP65 CCT Low Glare Surface Guide Light White

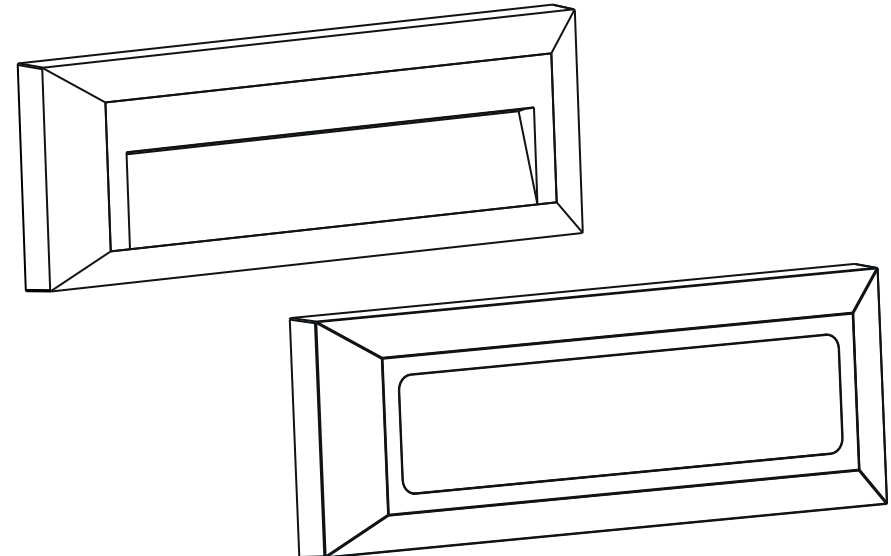

LED Lamp Specification	2W	4W
Luminaire lumens	100lm	400lm
Colour temperature	3000K/4000K/6000K	
Nominal Life time of the lamp	50,000	
Number of switching cycles before premature failure	25,000	
Warm-up time up to 60% of the full light output	Instant	
Dimmable	No	
Nominal Beam angle	60°	140°
Displacement factor	0.9	
Lumen Maintenance factor at the end of nominal life	0.8	
Colour rendering	80	
Colour consistency	< 6	
Rated peak intensity	123-135cd	115-126cd
Voltage / Frequency	240V 50Hz	
Lumen efficacy	50lm/W	100lm/W
This product contains a light source of energy efficiency class D		
Not suitable for accent lighting		



Huxley Close, Wellingborough, Northamptonshire, UK, NN8 6AB
Unit B4D, Airport Business Park, Cloghran, Co. Dublin, Ireland, K67X 7H9

Issue 0526

Email: sales@eterna-lighting.co.uk / technical@eterna-lighting.co.uk
Visit our website: www.eterna-lighting.co.uk

Made in China

Pack contents: 1x LED Fitting, 1x Fixing kit

A guide for qualified electricians

READ THIS FIRST:

Check the pack and make sure you have all of the parts listed on the front of this booklet. If not, contact the outlet where you bought this product.

This product must be installed by a competent person in accordance with the current building and IEE wiring regulations.

As the buyer, installer and/or user of this product it is your own responsibility to ensure that this fitting is fit for the purpose for which you have intended it. Eterna Lighting cannot accept any liability for loss, damage or premature failure resulting from inappropriate use.

This product is designed and constructed according to the principles of the appropriate British Standard. Using this fitting in an environment where there are prolonged periods of use or higher than normal ambient temperatures may result in a shortened working life.

Switch off the mains before commencing installation and remove the appropriate circuit fuse or lock off MCB.

This product is designed for permanent connection to fixed wiring: this must be a suitable circuit (protected with the appropriate MCB or fuse).

Make sure that the fixings are strong enough to support the weight of the fitting and hold it securely.

When working at heights ensure you use a suitable platform.

When making connections ensure that the terminals are tightened securely and that no strands of wire protrude. Check that the terminals are tightened onto the bared conductors and not onto any insulation.

You are advised at every stage of your installation to double-check any electrical connections you have made. After you have completed your installation there are electrical tests that should be carried out, these tests are specified in the current IEE wiring and building regulations. If in doubt, consult a qualified electrician.

This product is double insulated. Do not connect any part to Earth.

EVENTUALLY, YOU MAY WANT TO REPLACE THIS PRODUCT:

Regulations require the recycling of Waste from Electrical and Electronic Equipment (European “WEEE Directive” effective August 2005—UK WEEE Regulations effective February 2014). Environment Agency Registered Producer: WEE/GA0248QZ.

When your product comes to the end of its life or you choose to replace it, please recycle it where facilities exist – do not dispose with household waste.

CAUTION, RISK OF ELECTRIC SHOCK

The light source is designed to last the lifetime of the luminaire.

The light source contained in this luminaire shall only be replaced by the manufacturer, service agent or a similar qualified person.



CLEANING:

Clean this fitting only with a soft dry cloth. Do not use any chemical or abrasive cleaners.

IF YOU EXPERIENCE PROBLEMS:

If you believe your product is defective, please return it to the place where you bought it. Our Technical Team will gladly advise on any Eterna Lighting product, but may not be able to give specific instructions regarding individual installations.

INSTRUCTIONS:

Chose the location for your luminaire according to the conditions listed above

1. Turn off mains power and ensure supply is isolated
2. Detach the trim, unscrew and remove the clear diffuser
3. Using the housing as a template mark the location of the fixing holes on your mounting surface
4. Drill holes and fit wall plugs
5. Thread the supply cable through the gland and into the fitting ensuring a tight fit to maintain IP integrity
6. Secure the luminaire in place
7. Make the electrical connections into the terminal block according to the markings:

Brown wire to Live terminal marked **L**
Blue cable to the Neutral terminal marked **N**
8. Refit the clear diffuser and affix the trim