

| LED LAMP SPECIFICATIONS: | 8W | 14W | 16W |
|---|---------------------------------------|----------------|----------------|
| Luminaire lumens (with full trim) | 1000 lm | 1600 lm | 1900 lm |
| Luminaire lumens (with eyelid trim) | 500 lm | 800 lm | 1000 lm |
| Rated Wattage | 8W / 14W / 16W | | |
| Nominal life time of the lamp | 50,000 hrs | | |
| Colour temperature | 2700K / 3000K / 4000K / 5000K / 6000K | | |
| Number of switching cycles before premature lamp failure | >25,000 | | |
| Warm-up time up to 60% of the full light output | Instant full light | | |
| Dimmable | No | | |
| Nominal beam angle | 120° | | |
| Displacement factor | 0.9 | | |
| Lumen maintenance factor at end of nominal life | 0.9 | | |
| Colour rendering | 80 | | |
| Colour consistency | <6 step Macadam ellipse | | |
| Rated peak intensity (full trim) | 310 cd | 520 cd | 620 cd |
| Rated peak intensity (eyelid trim) | 160 cd | 260 cd | 310 cd |
| Voltage / Frequency | 220-240V~50Hz | | |
| Lumen efficacy (full trim) | 125 lm / W | 114 lm / W | 119 lm / W |
| Lumen efficacy (eyelid trim) | 63 lm / W | 57 lm / W | 63 lm / W |
| This product contains a Light Source of Energy Efficiency Class D | | | |
| Not suitable for accent lighting | | | |
| Reference control setting 16W 4000K | | | |

eterna.

INSTALLATION INSTRUCTIONS






Scan QR code
to go to web page

E02LNACW / E02LNACB E02LNACIW / E02LNACIB Lina

Lina 8W/14W/16W Switchable LED CCT IP66 Bulkhead

PlugPack
Compatible

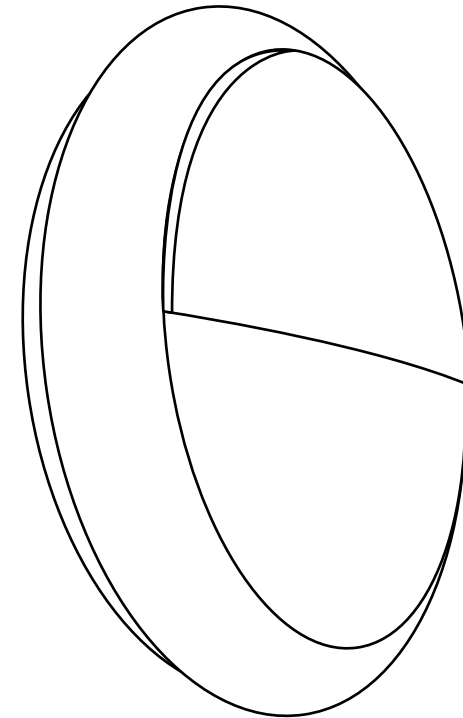

Huxley Close, Wellingborough, Northamptonshire, UK, NN8 6AB
Unit B4D, Airport Business Park, Cloghran, Co. Dublin, Ireland, K67X 7H9

Issue 1224

Email: sales@eterna-lighting.co.uk / technical@eterna-lighting.co.uk
Visit our website: www.eterna-lighting.co.uk

Made in China

Pack contents: 1 x LED ceiling/wall fitting, 1 x trim

A guide for qualified electricians

READ THIS FIRST:

Check the pack and make sure you have all of the parts listed on the front of this booklet. If not, contact the outlet where you purchased this product.

This product must be installed by a competent person in accordance with the current building and IEE wiring regulations.

As the buyer, installer and/or user of this product it is your own responsibility to ensure that this fitting is fit for the purpose for which you have intended it. Eterna Lighting cannot accept any liability for loss, damage or premature failure resulting from inappropriate use.

This product is designed and constructed according to the principles of the appropriate British Standard. Using this fitting in an environment where there are prolonged periods of use or higher than normal ambient temperatures may result in a shortened working life

Switch off the mains before commencing installation and remove the appropriate circuit fuse or lock off MCB.

This product is designed for permanent connection to fixed wiring: this must be a suitable circuit (protected with the appropriate MCB or fuse).

Make sure that the fixings are strong enough to support the weight of the fitting and hold it securely.

When working at heights ensure you use a suitable platform.

When making connections ensure that the terminals are tightened securely and that no strands of wire protrude. Check that the terminals are tightened onto the bared conductors and not onto any insulation.

You are advised at every stage of your installation to double-check any electrical connections you have made. After you have completed your installation there are electrical tests that should be carried out, these tests are specified in the current IEE wiring and building regulations. If in doubt, consult a qualified electrician.

EVENTUALLY, YOU MAY WANT TO REPLACE THIS PRODUCT:

Regulations require the recycling of Waste from Electrical and Electronic Equipment (European “WEEE Directive” effective August 2005—UK WEEE Regulations effective February 2014). Environment Agency Registered Producer: WEE/GA0248QZ.

When your product comes to the end of its life or you choose to replace it, please recycle it where facilities exist – do not dispose with household waste.

CLEANING:

Clean this fitting only with a soft dry cloth.
Do not use any chemical or abrasive cleaners.


IF YOU EXPERIENCE PROBLEMS:

If you believe your product is defective, please return it to the place where you bought it. Our Technical Team will gladly advise on any Eterna Lighting product, but may not be able to give specific instructions regarding individual installations.

CAUTION, RISK OF ELECTRIC SHOCK

The light source is designed to last the lifetime of the luminaire.

The light source contained in this luminaire shall only be replaced by the manufacturer, service agent or a similar qualified person.



1

Turn off mains power and ensure supply is isolated

2

Twist off bezel anti-clockwise

Unscrew front diffuser

3

Ensure correct orientation using the arrow on base

2 pre-drilled 20mm cable entry holes with grommets and a central BESA mounting point

Apply silicone sealant to the fixings if IP rating is to be maintained

4

Make the connections from the mains cable to the push fit terminal block

5

Select colour temperature and wattage preferences by adjusting the switches on the driver

6K/5K/4K/3K/2.7K

16W/12W/8W

6

Replace front diffuser using the location points and screws

Twist trim clockwise and ensure it is fully secured

7

Turn on mains supply