

ENERGY LABEL

Ενεργειακή απόδοση: **A**

Ετήσια κατανάλωση ενέργειας: **17.60 kWh/1000h**

Εterna OF16OP/PR

ENERGY LABEL

Ενεργειακή απόδοση: **A**

Ετήσια κατανάλωση ενέργειας: **30.80 kWh/1000h**

Εterna OF28OP/PR

Eterna OF16/28 Range

This luminaire is compatible with bulbs of the energy classes:

This luminaire is sold with a bulb of the energy class: **A**

874/2012

LAMP SPECIFICATIONS:	OF16	OF28
Nominal Wattage	16W	28W
Rated Wattage	16W	28W
Average lifetime hours	10,000 hrs	10,000 hrs
Nominal useful luminous flux	1100 lm	2050 lm
Rated luminous flux	1100 lm	2050 lm
Luminous efficacy (lm/W) in 50Hz operation	68	73
Rated lamp Lumen maintenance	2000 hrs: ≥85% 4000 hrs: ≥78% 6000 hrs: ≥76% 8000 hrs: ≥75%	2000 hrs: ≥85% 4000 hrs: ≥78% 6000 hrs: ≥76% 8000 hrs: ≥75%
Rated survival factors	2000 hrs: ≥98% 4000 hrs: ≥90% 6000 hrs: ≥88% 8000 hrs: ≥80%	2000 hrs: ≥98% 4000 hrs: ≥90% 6000 hrs: ≥88% 8000 hrs: ≥80%
Lamp dimensions (H/W/D)	136x133x26mm	200x200x32mm
Cap type	GR10q 4 Pin	GR10q 4 Pin
Lamp Mercury content to an accuracy of 0.1mg	≤3.5mg	≤3.5mg
Colour rendering index Ra	≥80	≥80
Colour temperature	3500K	3500K
Ambient temperature required to achieve maximum luminous flux	25°C	25°C
Dimmable	No	No
Ballast EEL	A2	A2



Issue 2014



FOR PRODUCT ADVICE:

- T: 01933 673 144
- F: 01933 678 083
- E: sales@eterna-lighting.co.uk

Visit our website:

www.eterna-lighting.co.uk



INSTALLATION INSTRUCTIONS

A guide for qualified electricians



Pack contents:
1 x Ceiling/wall fitting
1 x GR10q 4pin 16W or 28W fluorescent lamp

Model:

OF16OP / OF16PR / OF28OP / OF28PR

16/28W Ceiling/Wall Fitting

These instructions are provided as a guideline to assist you.

PLEASE READ THESE INSTRUCTIONS BEFORE INSTALLATION AND RETAIN FOR FUTURE REFERENCE

READ THIS FIRST:

Check the pack and make sure you have all of the parts listed on the front of this booklet. If not, contact the outlet where you bought this product.

This product must be installed by a competent person in accordance with the current building and IEE wiring regulations.

As the buyer, installer and/or user of this product it is your own responsibility to ensure that this fitting is fit for the purpose for which you have intended it. Eterna Lighting cannot accept any liability for loss, damage or premature failure resulting from inappropriate use.

This product is designed and constructed according to the principles of the appropriate British Standard and is intended for normal domestic service. Using this fitting in any other environments may result in a shortened working life, for example where there is prolonged periods of use or higher than normal ambient temperatures such as lighting public or shared spaces or in nursing /care home facilities.

Switch off the mains before commencing installation and remove the appropriate circuit fuse or lock off MCB.

The lamps supplied with this fitting are consumable parts and therefore may be outside of any warranty offered.

This unit is suitable for indoor and outdoor use.

This product is suitable for use in living areas, and Bathroom Zones 2 and outside of zones. If being fitted in a bathroom a 30mA RCD must be used.

Before making fixing hole(s), check that there are no obstructions hidden beneath the mounting surface such as pipes or cables.

When choosing the location for your new fitting, ensure that the fixings will be anchored in a solid surface e.g. concrete, brick or a joist—do not fix directly onto panelling, cladding, plasterboard etc.

When making connections ensure that the terminals are tightened securely and that no strands of wire protrude. Check that the terminals are tightened onto the bared conductors and not onto any insulation.

This product must be connected to earth termination.

You are advised at every stage of your installation to double-check any electrical connections you have made. After you have completed your installation there are electrical tests that should be carried out, these tests are specified in the current IEE wiring and building regulations.

NOTE: Very frequent switching can shorten the life of the lamp. If lighting controls are used with this product (e.g. PIR or microwave sensor) then to minimise this, it is recommended to adjust the time to the maximum setting.

CLEANING:


Clean this product only with a soft dry cloth.

The diffuser may be removed and washed in a mild detergent solution. Make sure the shades are completely dry before putting them back on your light fitting.

Do not use any chemical or abrasive cleaners.

INSTALLATION:

Choose the location for your new fitting according to the conditions listed above.

- 01) Remove the diffuser from base by removing the 3 fixing screws.
- 02) Remove the fluorescent tube.
- 03) Loosen the three screws retaining the gear tray, turn anti-clockwise and lift out.
- 04) Drill holes in the back of your fitting for your fixing screws. Use a drill bit sized appropriately to your fixing screws (not supplied).
- 05) Using the back of your fitting as a template, mark the position of your fixing holes on your mounting surface.
- 06) Prepare the holes in your mounting surface as appropriate for your fixings.
- 07) Pierce the rubber grommet in the back of your fitting making a hole just large enough to make a tight fit around the incoming mains cable.
- 08) Thread the cable through the grommet and offer the fitting to the ceiling.
- 09) Secure the fitting in place. Note, if protection against ingress of moisture is required, it is advised to cover the screws with a silicone/similar sealant to maintain the IP rating.
- 10) Check that the grommet is still correctly fitted in the cable entry hole and around the incoming cable.
- 11) Make the electrical connections to the connector block fixed to the underside of the gear tray according to the colour codes see below:
 - Brown wire to terminal marked (L)
 - Blue wire to neutral terminal marked (N)
 - Green/yellow striped cable to earth terminal 
- 12) Offer the gear tray into position locating on the three screws and turn clockwise and tighten the three retaining screws.
- 13) Fit the lamp pressing into position until the lamp has clicked into place and it is held securely.
- 14) Re-fit the diffuser and securing with the three screws.
- 15) Restore the power and switch on.

LAMP REPLACEMENT:

- 01) Switch off the electricity at the mains.
- 02) Remove diffuser by releasing the 3 fixing screws.
- 03) Pull the tube straight out of the fitting and press a new one back into position ensuring that it is retained securely.
- 04) Replace the diffuser and tighten screws.
- 05) Restore the power and switch on.

REPLACEMENT LAMP TYPE:

16W requires 1 x 16W GR10q 4 pin DD CFL (included). Fitting is rated at 16W max.

Replacement lamp available from Eterna: DD16435.

28W requires 1 x 28W GR10q 4 pin DD CFL (included). Fitting is rated at 28W max.

Replacement lamp available from Eterna: DD28435.

EVENTUALLY, YOU MAY WANT TO REPLACE THIS PRODUCT:


Regulations require the recycling of Waste from Electrical and Electronic Equipment (European "WEEE Directive" effective August 2005—UK WEEE Regulations effective 2nd January 2007). Environment Agency Registered Producer: WEE/GA0248QZ.

WHEN YOUR PRODUCT COMES TO THE END OF ITS LIFE OR YOU CHOOSE TO REPLACE IT, PLEASE RECYCLE IT WHERE FACILITIES EXIST - DO NOT DISPOSE WITH HOUSEHOLD WASTE.

IF YOU EXPERIENCE PROBLEMS:

If you believe your product is defective, please return it to the place where you bought it. Our Technical Team will gladly advise on any Eterna Lighting product, but may not be able to give specific instructions regarding individual installations.

For breakage information visit:
www.eterna-lighting.co.uk

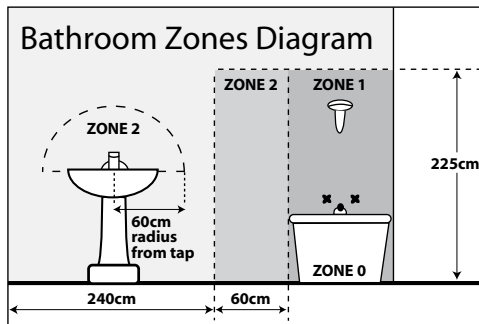

This product is designed for permanent connection to fixed wiring: this must be a suitable circuit (protected with the appropriate MCB or fuse).

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard and masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).