

**EVENTUALLY, YOU MAY WANT TO REPLACE THIS PRODUCT:**

Regulations require the recycling of Waste from Electrical and Electronic Equipment (European "WEEE Directive" effective August 2005—UK WEEE Regulations effective February 2014). Environment Agency Registered Producer: WEE/GA0248QZ.

When your product comes to the end of its life or you choose to replace it, please recycle it where facilities exist - do not dispose with household waste.

**CLEANING:**

Clean this fitting only with a soft dry cloth. Do not use any chemical or abrasive cleaners.

**IF YOU EXPERIENCE PROBLEMS:**

If you believe your product is defective, please return it to the place where you bought it. Our Technical Team will gladly advise on any Eterna Lighting product, but may not be able to give specific instructions regarding individual installations.

LED LAMP SPECIFICATIONS	4ft	5ft	6ft
Luminaire lumens	21W - <b>2625 lm</b>	32W - <b>4000 lm</b>	34W - <b>4500 lm</b>
	27W - <b>3375 lm</b>	41W - <b>5125 lm</b>	46W - <b>5750 lm</b>
	32W - <b>4000 lm</b>	50W - <b>6250 lm</b>	55W - <b>6875 lm</b>
	38W - <b>4750 lm</b>	58W - <b>7250 lm</b>	65W - <b>8125 lm</b>
Rated wattage	21W / 27W / 32W / 38W	32W / 41W / 50W / 58W	34W / 46W / 55W / 65W
Nominal life time of the lamp	50,000 hrs		
Colour temperature	3000K / 4000K / 6000K		
Number of switching cycles before premature lamp failure	25,000		
Dimmable	No		
Nominal beam angle	120°		
Displacement factor	0.9		
Lumen maintenance factor at end of nominal life	0.9		
Colour rendering	80		
Colour consistency	<6 SDCM		
Rated peak intensity	21W - 700-720cd	32W - 1310-1340cd	34W - 1450-1490cd
	27W - 880-905cd	41W - 1650-1700cd	46W - 1830-1900cd
	32W - 1050-1090cd	50W - 1980-2050cd	55W - 2205-2260cd
	38W - 1220-1280cd	58W - 1220-1280cd	65W - 2570-2635cd
Voltage / frequency	220-240V~ 50-60Hz		
Lumen efficacy	125 lm / W		
This product contains a light source of energy efficiency class D			
Not suitable for accent lighting			

# eterna.


## INSTALLATION INSTRUCTIONS



Scan QR code to go to web page


### E04VS4AC, E04VS5AC, E04VS6AC Verus

Verus Wattage Switchable LED CCT Linear

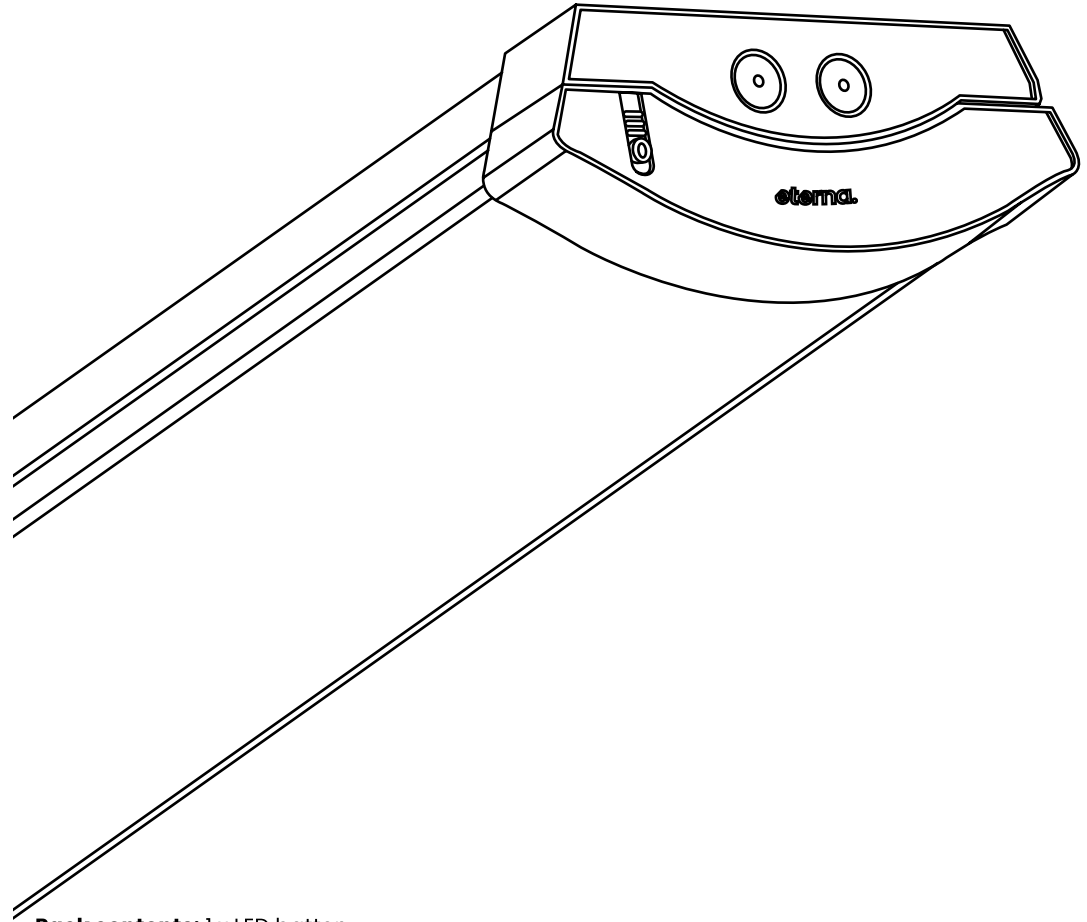

**Pack contents:** 1 x LED batten

### A guide for qualified electricians



Huxley Close, Wellingborough, Northamptonshire, UK, NN8 6AB  
Unit B4D, Airport Business Park, Cloghran, Co. Dublin, Ireland, K67X 7H9

Email: sales@eterna-lighting.co.uk / technical@eterna-lighting.co.uk  
Visit our website: www.eterna-lighting.co.uk

Issue 1024

Made in China

**1**

Turn off mains power and ensure supply is isolated

**2**

Lift and release the latch on both sides of the fitting and rotate to open

**3**

Cable entry is available at knockouts on each end cap and 3 x BESA mounting positions on the rear of the enclosure

**4**

Make the connections from the mains cable to the push fit terminal block and secure fitting into place using suitable fixings. Ensure cables are not trapped behind or inside the fitting

'PL' is to be used if using the emergency pack

Brown

Green/Yellow

Blue

**5**

Select colour temperature preference by adjusting the switch on the back of the LED tray

**6**

Select power preference by adjusting the dip switch mounted on the driver

4ft	21W	27W	32W	38W
1	OFF	ON	OFF	ON
2	OFF	OFF	ON	ON

5ft	32W	41W	50W	58W
1	OFF	ON	OFF	ON
2	OFF	OFF	ON	ON

6ft	34W	46W	55W	65W
1	OFF	ON	OFF	ON
2	OFF	OFF	ON	ON

**7**

When closing the batten make sure both internal latches have engaged

For security and safety, the diffuser can be locked into place with the screws provided

**8**

Turn on mains supply and test fitting