

BRIK PRO - BP22/2C





BI-EMISSION ASYMMETRIC WALL LIGHTING

220

110

33

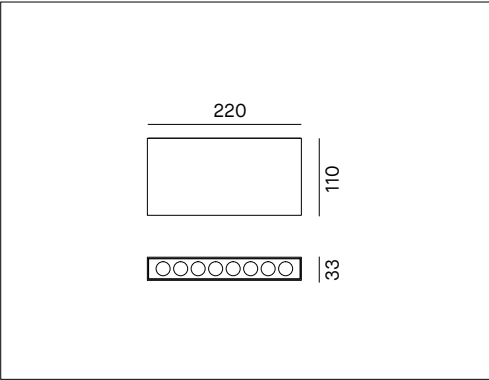

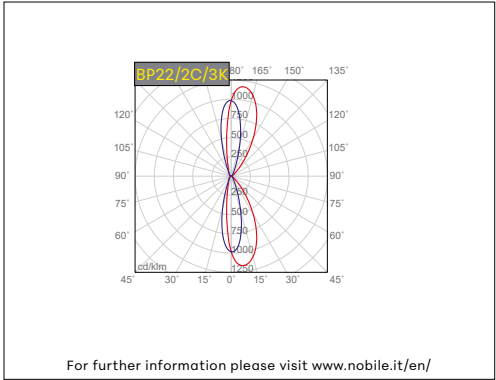

For further information please visit www.nobile.it/en/

SPECIFICATION TEXT

Rectangular outdoor LED luminaire for wall-mounted installation. Bi-emission lighting, asymmetric 40° light beam. Die-cast aluminium body painted white (RAL9003), grey (RAL9006), anthracite (RAL7016) or dark brown. Efficient flow and controlled luminance. High visual comfort CRI>90. Black silk-screened glass covering PMMA lens. IK10. IP67. IP68 waterproof connector. Reduced dimensions: length 220mm, depth 33mm, height 110mm. 220-240V - 50/60Hz power supply included.

Mounting	Product type	Outdoor wall-mounted luminaire			
	Installation type	Wall-mounted			
Dimension	Body	110x220mm			
	Width	33mm			
Lamp	LED	CREE			
	System/W	2x14W			
	Luminous flux nominal	BP22/2C/3K/_	2x1300lm	BP22/2C/4K/_	2x1400lm
	Luminous flux real	BP22/2C/3K/_	2x938lm	BP22/2C/4K/_	2x1000lm
	Colour temperature CCT	3000K, 4000K			
	Colour rendering index CRI	>90			
	LED Lifetime	50.000 h			
Light	Light distribution	Asymmetric direct and indirect			
	Light beam	20x30°			
Material	Body	Die-cast aluminium			
	Colour	A= anthracite RAL7016, G= grey RAL9006, W= white RAL9003, BR= dark brown			
	Diffuser	Black silk-screened glass			
	Lens	PMMA			
	Screws	Steel			
IK	IK	10			
Electrical	Operating voltage	220-240V 50-60Hz power supply included			
Warranty	Warranty	3 years			
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN61000-3-3, EN61000-3-2, EN61547, EN55015			

CODE CONFIGURATION

BP22	/	2C	/	*	*	/	*
1	Colour temperature		3K = 3000K; 4K = 4000K		1		
2	Colour		A= anthracite; G= grey; W= white; BR= dark brown				

Nobile Italia S.p.A.
Viale Alexandre Gustave Eiffel, 100 Commerc City Isola P.21-24 - 00148 Roma, Italia - Tel. +39 06 65002524 - info@nobile.it
Export Sales Department: Via Lavoratori Autobianchi, 1 20832 Desio (MB), Italia - Tel. +39 0362 1790030 - export.dpt@nobile.it

Rev.03 06/2024
p.01