

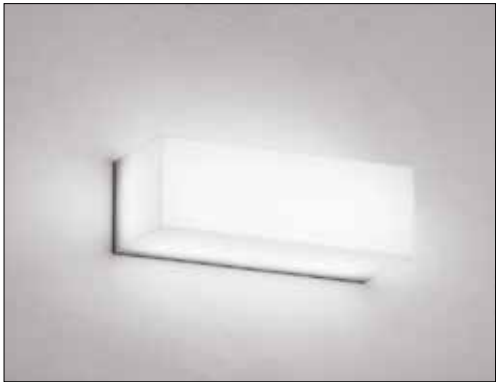


ICE - IC30

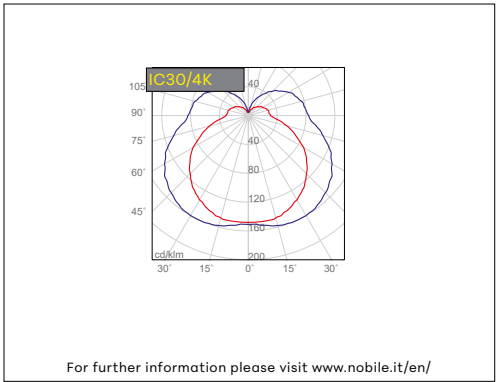

WALL LIGHTING

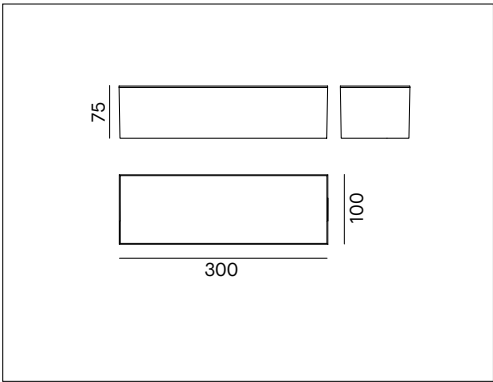

SPECIFICATION TEXT



Rectangular outdoor LED luminaire for ceiling or wall-mounted installation. Diffuse lighting. Polycarbonate body, opal diffuser. IP65. IK08. Reduced dimensions: length 300mm, depth 75mm, height 100mm. 220-240V LED board.

Mounting	Product type	Outdoor ceiling or wall-mounted luminaire			
	Installation type	Ceiling and wall-mounted			
Dimension	Body	100x300mm			
	Width	75mm			
Lamp	LED	2835			
	System/W	12W			
	Luminous flux nominal	IC30/3K	1550lm	IC30/4K	1700lm
	Luminous flux real	IC30/3K	851lm	IC30/4K	977lm
	Colour temperature CCT	3000K, 4000K			
	Colour rendering index CRI	>80			
	LED Lifetime	30.000 h			
Light	Light distribution	Diffuse			
Material	Body	White polycarbonate			
	Diffuser	Opal			
IK	IK	08			
Electrical	Operating voltage	220-240V LED board			
Warranty	Warranty	3 years			
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN61000-3-3, EN61000-3-2, EN61547, EN55015			

CODE CONFIGURATION

IC30	/	*	*
1	Colour temperature	3K = 3000K; 4K = 4000K.	1