



ICE - ICS35

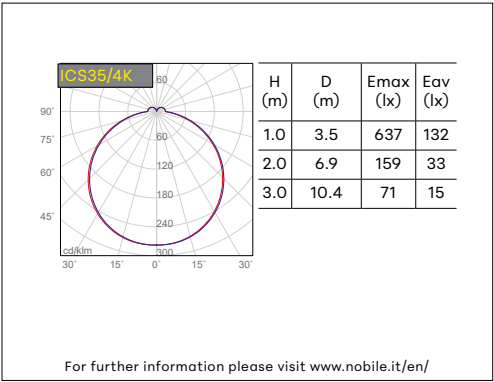

SQUARE LUMINAIRE

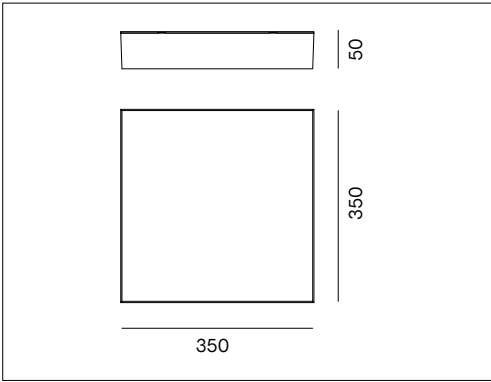

SPECIFICATION TEXT



IP65 square LED luminaire for wall-mounted or ceiling installation.LED 2835. Lifetime 30.000h (lumen maintenance). White polycarbonate body, opal diffuser. IK08. 220-240V LED board.

Mounting	Product type	Surface-mounted luminaire			
	Installation type	Ceiling, wall			
Dimension	Frame	350x350mm			
	Height	50mm			
Lamp	LED	2835			
	System/W	24W			
	Luminous flux nominal	ICS35/3K	3300lm	ICS35/4K	3600lm
	Luminous flux real	ICS35/3K	2093lm	ICS35/4K	2284lm
	Colour temperature CCT	3000K, 4000K			
	Colour rendering index CRI	>80			
	LED Lifetime	30.000h			
	UGR	<25			
Light	Light distribution	Diffuse			
	Light beam	120°			
Material	Body	White polycarbonate			
	Diffuser	Opal			
IK	IK	IK08			
Electrical	Operating voltage	220-240V 50-60Hz LED board			
Warranty	Warranty	3 years			
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015			

CODE CONFIGURATION

ICS35	/	*	*
1	Colour temperature	3K = 3000K; 4K = 4000K.	1