



LOOP - L10F

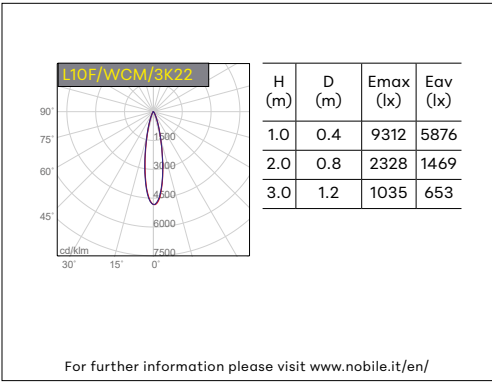

10 LIGHTS - FIXED WITH FRAME

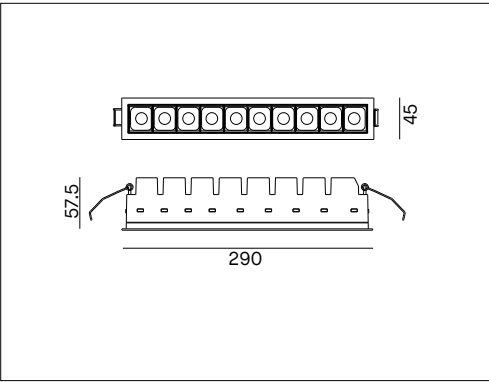

SPECIFICATION TEXT

Rectangular recessed LED luminaire with 10 lights, fixed optics and perimeter surface frame. Efficient flow and controlled luminance UGR<16 (25°) or UGR<19 (40°). High visual comfort CRI>90. IP20. Aluminium body available in 2 finish options, 4 polycarbonate reflector available colours. Power supply included, dimmable versions and remote control options available. Compliant with CAM EDILIZIA standards, minimum environmental criteria. (Ministerial Decree of June 23, 2022).

Mounting	Product type	Recessed fixed downlight							
	Installation type	Ceiling-mounted							
Dimension	Frame	290x45mm							
	Height	57.5mm							
	Cut-out	282x37mm							
	Minimum recessed depth	120mm							
	Plasterboard depth	min. 1mm max. 25mm							
Lamp	LED	Osram							
	LED/W	22W							
	System/W	24W							
	Luminous flux nominal	L10F/WCM/3K22/_	2100lm	L10F/WCM/4K22/_	2200lm	L10F/WCF/3K22/_	2100lm	L10F/WCF/4K22/_	2200lm
		L10F/BCM/3K22/_	2100lm	L10F/BCM/4K22/_	2200lm	L10F/BCF/3K22/_	2100lm	L10F/BCF/4K22/_	2200lm
	Luminous flux real	L10F/WCM/3K22/_	1925lm	L10F/WCM/4K22/_	2017lm	L10F/WCF/3K22/_	1780lm	L10F/WCF/4K22/_	1865lm
		L10F/BCM/3K22/_	1925lm	L10F/BCM/4K22/_	2017lm	L10F/BCF/3K22/_	1780lm	L10F/BCF/4K22/_	1865lm
	Colour temperature CCT	3000K, 4000K							
	Colour rendering index CRI	>90							
	LED Lifetime	50.000 h L70B10 (Ta25°)							
Light	MacAdam	3							
	UGR	<16 (25°) - <19 (40°)							
	Adjustability	0° rotation / 0° tilt							
	Light distribution	Direct							
Material	Light beam	25°, 40°							
	Body	Die-cast aluminium							
	Frame	Aluminium painted white (RAL9016) or black (RAL9005)							
Electrical	Reflector	Polycarbonate, 4 colours: B black, G gold matt, M silver matt, W white							
	Driver	220-240V 50-60Hz included							
	LED current	700mA							
Warranty	Warranty	5 years							
Norms	Norm compliance	EN60598-1, EN60598-2-2, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015							

CODE CONFIGURATION

L	*	*	*	/	*	C	*	/	*	*	*	*	/	*	*
	1		2		3		4		5		6		7	8	
1	LED modules			01 = 1; 02 = 2; 03 = 3; 04 = 4; 05 = 5; 10 = 10.											
2	Adjustability			F = fixed; A = adjustable...											
3	Body colour			B = black; W = white.											
4	Light beam			M = 25°; F = 40°.											
5	Colour temperature			3K = 3000K; 4K = 4000K.											
6	Power W			(01) 2; (02) 4; (03) 7; (04) 9; (05) 11; (10) 22.											
7	Colour reflector			B = black; G = gold matt; M = silver matt; W = white.											
8	Driver**			1 = On-Off Made in Italy; 2* = PUSH/1-10V Made in Italy; 3 = DALI Made in Italy; 6 = On-Off; 9 - Wi-Fi ZIGBEE Made in Italy (Zigbee gateway, not included); 10 - Bluetooth BLL Made in Italy (by APP BLL PLUS: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android)											

** 1-2-3-9-10-11 not suitable for 01 version
* Max 4 devices PUSH button

Emergency kit available upon request

KIT/EMERGENZA/3H	Emergency kit for LED up to 3 hours
------------------	-------------------------------------