
## NOBILE Italia

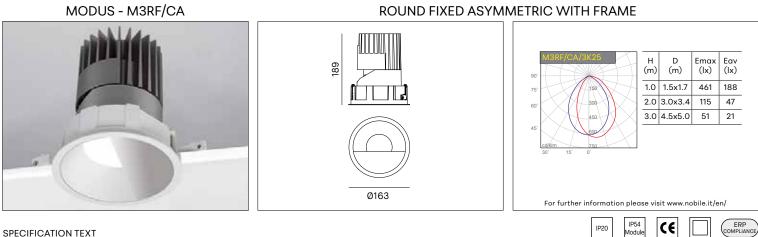

## SPECIFICATION TEXT

Round recessed LED luminaire with fixed asymmetric emission and perimeter surface frame. Efficient flow and controlled luminance. High visual comfort CRI>90. IP20. IP54 LED module. Silver matt polycarbonate reflector. Adjustable fixing brackets for ceiling depth from 1mm to 25mm. Honeycomb anti-dazzle screen available as accessory. Power supply included, dimmable versions and remote control options available. Compliant with CAM EDILIZIA standards, minimum environmental criteria. (Ministerial Decree of June 23, 2022).

Mounting	Product type	Recessed fixed downlight											
	Installation type	Installation type Ceiling-mounted											
Dimension	Diameter	163mm											
	Height	189mm											
	Cutout	150mm											
	Minimum recessed depth	240mm											
	Plasterboard depth	min. 1mm max. 35mm											
Lamp	LED	Citizen COB											
	LED/W	25W or 38W											
	System/W	28W or 40W											
	Luminous flux nominal	M3RF/CA/3K25/M 2200lm M3RF/CA/4K25/M 2400lm M3RF/CA/3K38/M 3400lm M3RF/CA/4K38/M 3600lm											
	Luminous flux real	M3RF/CA/3K25/M 728lm M3RF/CA/4K25/M 794lm M3RF/CA/3K38/M 1125lm M3RF/CA/4K38/M 1191lm											
	Colour Temperature CCT	3000K, 4000K											
	Colour Rendering Index CRI	>90											
	LED Lifetime	50.000 h L70B10 (Ta 25°)											
	MacAdam	3											
Light	Adjustability	0° rotation / 0° tilt											
	Light distribution	Direct											
	Light beam	Asymmetric											
Material	Body	Die-cast aluminium											
	Frame	White-painted aluminium											
	Reflector	Polycarbonate											
Electrical	Driver	220-240V 50-60Hz power supply included											
	LED current	700mA or 1050mA											
Warranty	Warranty	5 years											
Norms	Norm compliance	EN60598-1, EN60598-2-2, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015											

## CODE CONFIGURATION

М	*	*	*	1	*	*	1	*	*	*	*	1	*	*
	1	2	3		4	5		6		7			8	9
1	Module din	nension		<b>1</b> = 100mm ; <b>2</b> = 125mm; <b>3</b> = 150mm.										
2	Frame			R = round; S = square.										
3	Orientation			F = fixed ; A = adjustable										
4	Installation type			C = frame; T = trimless.										
5	Light beam			$\mathbf{M} = 20^\circ; \mathbf{F} = 40^\circ; \mathbf{A} = asymmetric$										
6	Colour tem	perature		<b>3K</b> = 3000K; <b>4K</b> = 4000K										
7	Power W	-		(M1) 13 or 18; (M2) 18 or 25; (M3) 25 or 38.										
8	Reflector c	olour		B = black, C = chrome; G = gold matt; M = silver matt; W = white.										
9	Driver			1 = On-Off Made in Italy; 2* = PUSH/1-10V Made in Italy; 3 = DALI Made in Italy; 6 = On-Off; 9 - Wi-Fi ZIGBEE Made in Italy (Zigbee gateway, not included); 10 - Bluetooth BLL Made in Italy (by APP BLL PLUS: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android); 11 - Bluetooth CASAMBI Made in Italy; 12 - Bluetooth CASAMBI										
				* Max 4 devices PUSH botton										

Emergency kit available upon request

KIT/EMERGENZA/3H Emergency kit for LED up to 3 hours

Nobile Italia S.p.A. Viale Alexandre Gustave Eiffel, 100 Commercity Isola P.21-24 - 00148 Roma, Italia - Tel. +39 06 65002524 - info@nobile.it <u>Export Sales Department</u>: Via Lavoratori Autobianchi, 1 20832 Desio (MB), Italia - Tel. +39 0362 1790030 - export.dpt@nobile.it

IP20

CE