



PL35



CEILING-MOUNTED LUMINAIRE Ø330

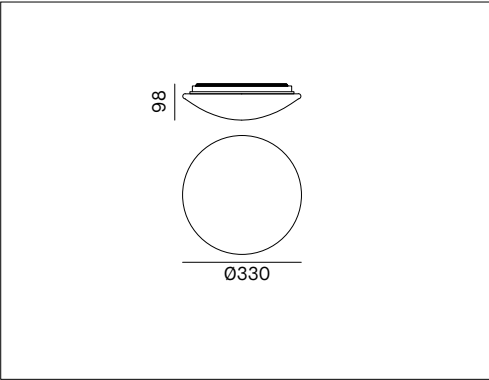



H (m)	D (m)	E _{max} (lx)	E _{av} (lx)
1.0	3.5	523	107
2.0	6.8	131	27
3.0	10.3	58	12

For further information please visit www.nobile.it/en/

SPECIFICATION TEXT

IP54

CE

ERP COMPLIANCE

Round LED luminaire with diffuse light for ceiling -mounted installation. Efficient flow. Good visual comfort and opal polycarbonate diffuser for homogeneous light result. Body in white painted steel. IP54. IK08.
Dimensions: diameter 330mm, height 98mm. Power supply included.

Mounting	Product type	Ceiling-mounted luminaire			
	Installation type	Ceiling-mounted			
Dimension	Diameter	330mm			
	Height	98mm			
Lamp	LED	LG5630			
	System/W	22W			
	Luminous flux nominal	PL35/3K	2350lm	PL35/4K	2550lm
	Luminous flux real	PL35/3K	1836lm	PL35/4K	1924lm
	Colour temperature CCT	3000K, 4000K			
	Colour rendering index CRI	>80			
Light	LED Lifetime	36.000 h			
	Light distribution	Diffuse			
	Light beam	120°			
Material	Body	White painted steel			
	Diffuser	Opal polycarbonate			
IK	IK	IK08			
Electrical	Driver	220-240V 50-60Hz included			
Warranty	Warranty	2 years			
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015			

CODE CONFIGURATION

PL35	/	*	*
1	Colour temperature	3K = 3000K; 4K = 4000K.	1