NOBILE
Italia

TRIS - PLDR33

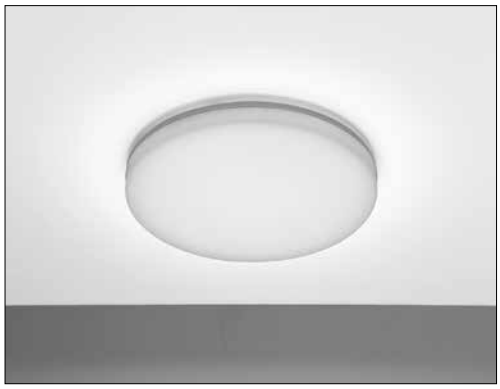

TRIS ROUND



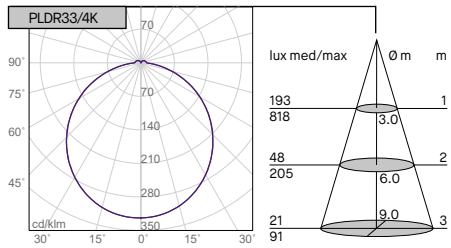

For further information please visit www.nobile.it/en/

IP20 | CE | ERP COMPLIANCE

SPECIFICATION TEXT

Round LED luminaire with direct light for surface-mounted installation. Efficient flow. Good visual comfort and opal diffuser for homogeneous light result. IP20. IK08. One product with colour temperature selector integrated: 3000K-4000K-5000K. Power supply included.

Mounting	Product type	**Surface-mounted luminaire**		
	Installation type	**Surface**		
Dimension	Diameter	**330mm**		
	Height	**48mm**		
Lamp	LED	**2835**		
	System/W	**24W**		
	Luminous flux nominal	**PLDR33**	3550lm	**at 4000K**
	Luminous flux real	**PLDR33**	2527lm	**at 4000K**
	Colour temperature CCT	**3000K-4000K-5000K**		
	Colour rendering index CRI	**>80**		
	LED Lifetime	**30.000 h**		
	UGR	**<28**		
Light	Light distribution	**Direct**		
	Light beam	**110°**		
Material	Body	**White polycarbonate**		
	Frame	**Aluminium painted white**		
	Diffuser	**Opal**		
IK	IK	**IK08**		
Electrical	Driver	**220-240V 50-60Hz included**		
Warranty	Warranty	**2 years**		
Norms	Norm compliance	**EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015**		