



TRIS - PLDS40

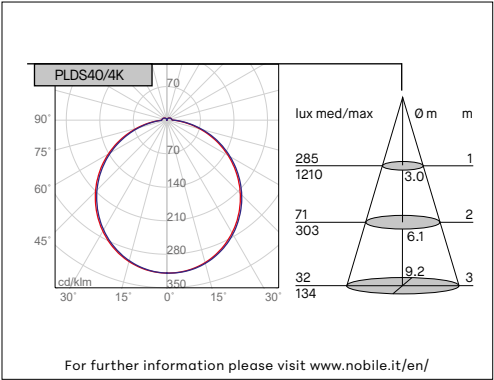

TRIS SQUARE

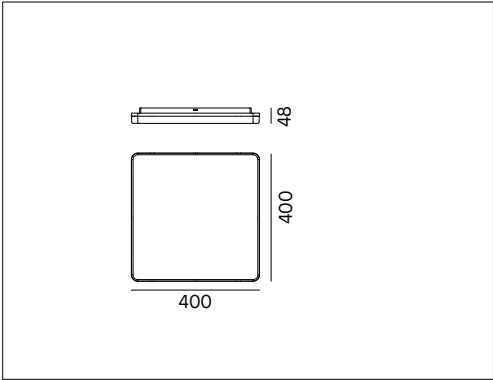

SPECIFICATION TEXT



Square LED luminaire with direct light for surface-mounted installation. Efficient flow. Good visual comfort and opal diffuser for homogeneous light result. IP20. IK08. One product with colour temperature selector integrated: 3000K-4000K-5000K. Power supply included.

Mounting	Product type	Surface-mounted luminaire		
	Installation type	Surface		
Dimension	Frame	400x400mm		
	Height	48mm		
Lamp	LED	2835		
	System/W	36W		
	Luminous flux nominal	PLDS40	5650lm	a 4000K
	Luminous flux real	PLDS40	3791lm	a 4000K
	Colour temperature CCT	3000K-4000K-5000K		
	Colour rendering index CRI	>80		
	LED Lifetime	30.000 h		
	UGR	<28		
Light	Light distribution	Direct		
	Light beam	110°		
Material	Body	White polycarbonate		
	Frame	Aluminium painted white		
	Diffuser	Opal		
IK	IK	IK08		
Electrical	Driver	220-240V 50-60Hz included		
Warranty	Warranty	2 years		
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015		