



PLIS40



PLIS SQUARE

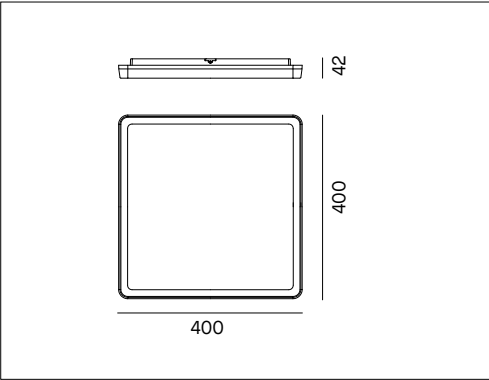

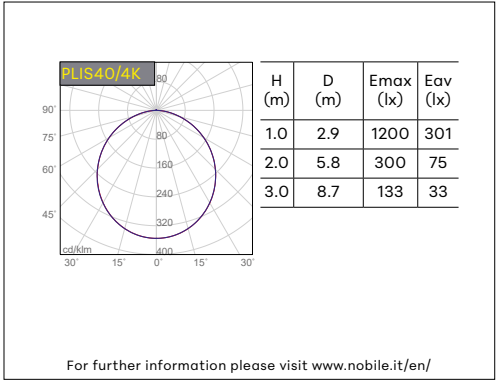

SPECIFICATION TEXT

Square LED luminaire with direct light for surface-mounted installation. Efficient flow. Good visual comfort and opal diffuser for homogeneous light result. White polycarbonate body. Opal diffuser. IP65. IK08. Additional coloured frame available in grey or black. Dimension 400x400mm, height 42mm. 220-240V - 50/60Hz power supply included.

Mounting	Product type	Surface-mounted luminaire			
	Installation type	Ceiling, wall			
Dimension	Frame	400x400mm			
	Height	42mm			
Lamp	LED	2835			
	System/W	36W			
	Luminous flux nominal	PLIS40/3K	5000lm	PLIS40/4K	5350lm
	Luminous flux real	PLIS40/3K	3370lm	PLIS40/4K	3475lm
	Colour temperature CCT	3000K, 4000K			
	Colour rendering index CRI	>80			
	LED Lifetime	30.000 h			
	UGR	<28			
Light	Light distribution	Direct			
	Light beam	110°			
Material	Body	White polycarbonate			
	Frame	Polycarbonate white (W), grey (G) or black (B)			
	Diffuser	Opal			
	Screws	Steel			
IK	IK	IK08			
Electrical	Operating voltage	220-240V 50-60Hz power supply included			
Warranty	Warranty	3 years			
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015			

CODE CONFIGURATION

PLIS40	/	*	*
1	Colour temperature	3K = 3000K; 4K = 4000K.	1

Accessoriies available upon request

ANELLO/PLIS40/B	Black square frame 400x400mm
ANELLO/PLIS40/G	Grey square frame 400x400mm