



PLANO - PLN3/D

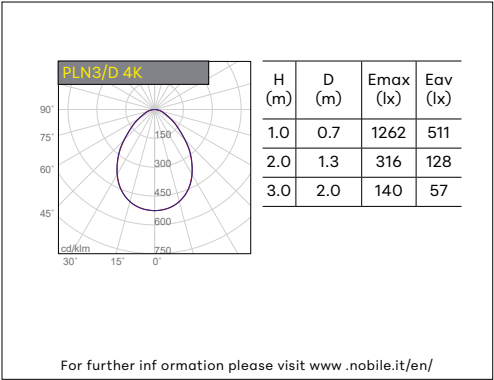

DOWNLIGHT

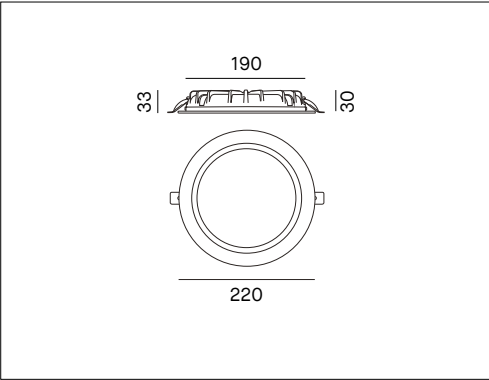

SPECIFICATION TEXT



Round recessed LED luminaire with diffuse emission. Efficient flow and controlled luminance. Good visual comfort. IP20/IP54. Die-cast aluminium body and frame in white-painted aluminium. Polycarbonate micro-prismatic diffuser. Integrated CCT selector: 3000K-4000K-6500K. Power supply included. Dimmable versions and remote control options available. Compliant with CAM EDILIZIA standards, minimum environmental criteria. (Ministerial Decree of June 23, 2022).

Mounting	Product type	Recessed LED luminaire						
	Installation type	Ceiling						
Dimension	Diameter	220mm						
	Height	33mm						
	Cut out	200mm						
	Minimum recessed depth	100mm						
Lamp	LED	SMD						
	LED/W	18W						
	System/W	20W						
	Luminous flux nominal	PLN3/D	3000K	2800lm	4000K	2950lm	6500K	2950lm
	Luminous flux real	PLN3/D	3000K	2200lm	4000K	2400lm	6500K	2400lm
	Colour temperature CCT	3000K-4000K-6500K						
	Colour rendering index CRI	>80						
	LED Lifetime	50.000h L70B10 (Ta 25°)						
Light	Light distribution	Diffuse						
	Light beam	80°						
Material	Body	Die-cast aluminium						
	Frame	White-painted aluminium						
	Diffuser	Polycarbonate micro-prismatic						
Electrical	Driver	ON-OFF 220-240V 50-60Hz included						
	LED current	515mA						
Warranty	Warranty	5 years						
Norms	Norm compliance	EN60598-1, EN60598-2-2, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015						

CODE CONFIGURATION

PLN3/D	/	*
		1

1 Driver * 1 = On-Off Made in Italy; 2 = PUSH/1-10V Made in Italy; 3 = DALI Made in Italy.

* no extension includes On-Off standard driver
2 = Max 4 devices PUSH button

Emergency kit available upon request

KIT/EMERGENZA/3H	Emergency kit for LED up to 3 hours
------------------	-------------------------------------