



RAY PRO - PRO32

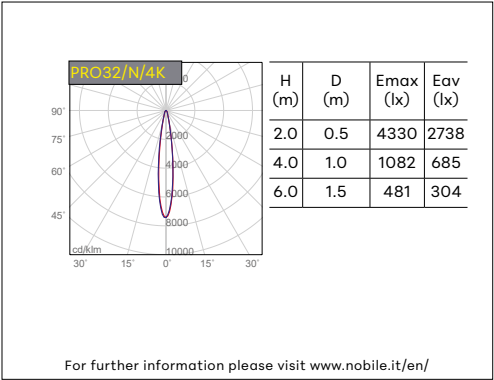

OUTDOOR PROJECTOR

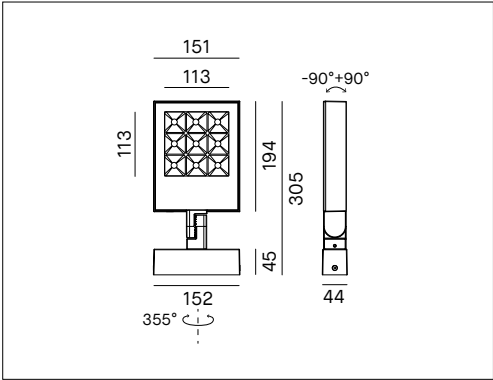

SPECIFICATION TEXT


Outdoor LED projector with support for wall installation or on pole ø60mm or ø76mm. Die-cast aluminium body painted white (RAL9010), grey (RAL7040) or anthracite (RAL7016). Efficient flow, high visual comfort CRI>90. Narrow emission 18° or 36°, black silk-screened glass covering the polycarbonate lens. Adjustable, rotation 355°, -90°+90° tilt. IK10. IP67. Neoprene H05RN-F 3x0.75mm² cable of 1500mm. 220-240V - 50/60Hz power supply included.

Mounting	Product type	Outdoor projector with base			
	Installation type	Wall or pole mounted through base			
Dimension	Body	151x194mm			
	Body length	305mm			
	Width	44mm			
	LED	CREE			
Lamp	System/W	32W			
	Luminous flux nominal	PRO32/N/3K/_	3200lm	PRO32/N/4K/_	3450lm
		PRO32/M/3K/_	3200lm	PRO32/M/4K/_	3450lm
	Luminous flux real	PRO32/N/3K/_	2140lm	PRO32/N/4K/_	2307lm
		PRO32/M/3K/_	2433lm	PRO32/M/4K/_	2623lm
	Colour temperature CCT	3000K, 4000K			
	Colour rendering index CRI	>90			
	LED Lifetime	50.000 h			
Light	MacAdam	3			
	Adjustability	0-355° rotation / -90+90° tilt			
	Light distribution	Direct			
	Light beam	18°, 36°			
Material	Body	Die-cast aluminium			
	Colour	A= anthracite RAL7016 , G= grey RAL9006 , W= white RAL9003			
	Diffuser	Black silk-screened glass			
	Reflector	Aluminium			
	Screws	Stainless steel			
	Cable	Neoprene H05RN-F 3x0.75mm² 1500mm			
IK	IK	10			
Electrical	Operating voltage	220-240V 50-60Hz power supply included			
Warranty	Warranty	3 years			
Norms	Norm compliance	EN60598-1, EN60598-2-5, EN62471, IEC/TR 62778, EN61000-3-3, EN61000-3-2, EN61547, EN55015			

CODE CONFIGURATION

PRO32	/	*	/	*	*	/	*
		1		2			3
1	Light beam	N = 18°; M = 36°.					
2	Colour temperature	3K = 3000K; 4K = 4000K.					
3	Colour	A= anthracite; G= grey; W= white					


RAY PRO

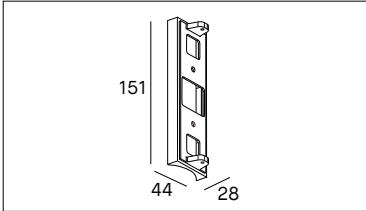

BASE/PRO/_

Kit fixing bracket for pole Ø60 and Ø76. White, grey or anthracite painted. W white G grey A anthracite

ACCESSORIES AVAILABLE UPON REQUEST

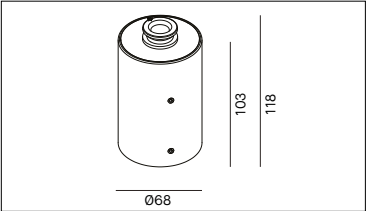

POLE/PRO/_

Fixing head for pole Ø60. White, grey or anthracite painted. W white G grey A anthracite