

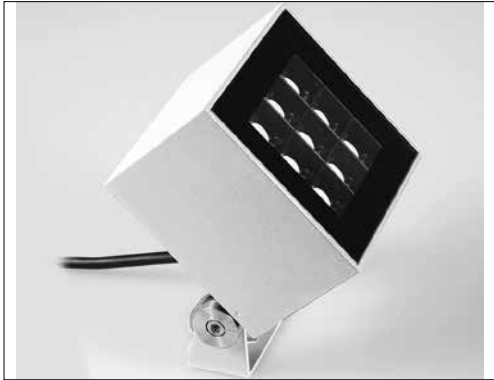



QUBO - Q3

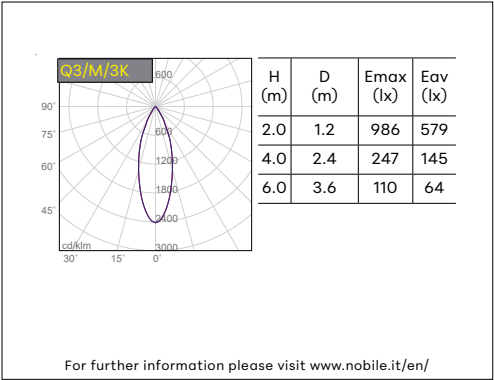

OUTDOOR PROJECTOR

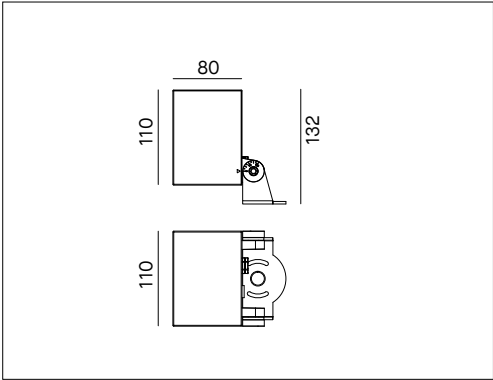

SPECIFICATION TEXT



Outdoor LED projector with bracket and spike for installation on floor or ground. Die-cast aluminium body painted white (RAL9003), grey (RAL9006) or anthracite (RAL7016). Transparent tempered glass. IK06. IP65. Adjustable, rotation 0-60°, 0-120° tilt. Precision tilting degree marker on the product to facilitate orientation. Neoprene H05RN-F 2x0.75mm² cable of 2000mm. 220-240V - 50/60Hz power supply included.

Mounting	Product type	Outdoor projector with bracket and spike	
	Installation type	Floor or ground-installed through base or spike	
Dimension	Body frame	110x110mm	
	Body width	80mm	
	Height	132mm	
Lamp	LED	CREE	
	System/W	21W	
	Luminous flux nominal	Q3/M/3K/_	2100lm
	Luminous flux real	Q3/M/3K/_	1630lm
	Colour temperature CCT	3000K	
	Colour rendering index CRI	>80	
	LED Lifetime	30.000 h	
Light	MacAdam	3	
	Adjustability	0-60° rotation / 0-120° tilt	
	Light distribution	Direct	
	Light beam	36°	
Material	Body	Die-cast aluminium	
	Colour	A= anthracite RAL7016 , G= grey RAL9006 , W= white RAL9003	
	Diffuser	Transparent tempered glass	
	Spike	Plastic (included)	
	Screws	Stainless steel	
	Cable	Neoprene H05RN-F 2x0.75mm² 2000mm	
IK	IK	06	
Electrical	Driver	Power supply 220-240V 50-60Hz included	
Warranty	Warranty	3 years	
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN61000-3-3, EN61000-3-2, EN61547, EN55015	

CODE CONFIGURATION

Q3	/	M	/	3K	/	*
1	Colour	A= anthracite; G= grey; W= white.				1