



R43



TRACK LIGHT

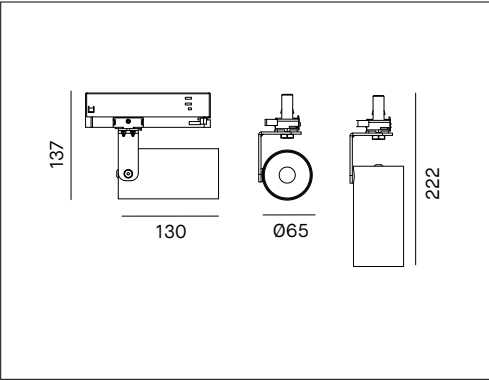

R43/4K/35



H (m)	D (m)	E _{max} (lx)	E _{av} (lx)
1.0	0.6	5206	3047
2.0	1.2	1301	762
3.0	1.8	578	339

For further information please visit www.nobile.it/en/

SPECIFICATION TEXT

IP20

CE

ERP COMPLIANCE

Adjustable LED projector for eurostandard track installation. HONGLI COB LED. Lifetime 50.000h (L70B20). High visual comfort CRI>90. Body in white (RAL9003) or matt black (RAL9005) painted aluminium. PMMA interchangeable lens. IP20. Power supply included. DALI dimmable version available.

Mounting	Product type	Track light for three phase track					
	Installation type	On eurostandard track. Compatible with follow tracks: Global, Eutrac, Nuco, Ivela, Staff, Norlux, Unipro, Powergear, Erco					
Dimension	Body diameter	65mm					
	Body height	130mm					
	Total length	222mm					
Lamp	LED	Hongli COB					
	System/W	22W					
	Luminous flux nominal	R43/3K/20/_	2400lm	R43/3K/35/_	2400lm	R43/3K/60/_	2400lm
		R43/4K/20/_	2450lm	R43/4K/35/_	2450lm	R43/4K/60/_	2450lm
	Luminous flux real	R43/3K/20/_	2090lm	R43/3K/35/_	2200lm	R43/3K/60/_	2050m
		R43/4K/20/_	2100lm	R43/4K/35/_	2250lm	R43/4K/60/_	2090lm
	Colour Temperature CCT	3000K, 4000K					
	Colour Rendering Index CRI	>90					
	LED Lifetime	50.000 h L70B20 (Ta25°)					
	MacAdam	3					
Light	Light distribution	Direct					
	Light beam	20°, 35°, 60°					
Material	Body	Die-cast aluminium					
	Colour	B = black RAL9005, W= white RAL9003					
	Reflector	PMMA High efficiency					
Electrical	Driver	ON-OFF 220-240V 50-60Hz included					
	LED current	550mA					
Warranty	Warranty	3 years (5 years with Made in Italy driver)					
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN61000-3-3, EN61000-3-2, EN61547, EN55015					

CODE CONFIGURATION

R43	/	*	*	/	*	*	/	*	/	*	*	*
		1			2			3			4	
1	Colour temperature	3K = 3000K; 4K = 4000K.										
2	Light beam	20 = 20°; 35 = 35°; 60 = 60°										
3	Colour	B = black; W = white.										
4	Driver *	standard = On-Off; 1 = On-Off Made in Italy; 3 = DALI Made in Italy										

*no extension includes On-Off standard driver

ACCESSORIES UPON REQUEST

Code	Description
LENS/R43/20	Interchangeable 20° lens for R43/R44
LENS/R43/35	Interchangeable 35° lens for R43/R44
LENS/R43/60	Interchangeable 60° lens for R43/R44