



RING - RG01

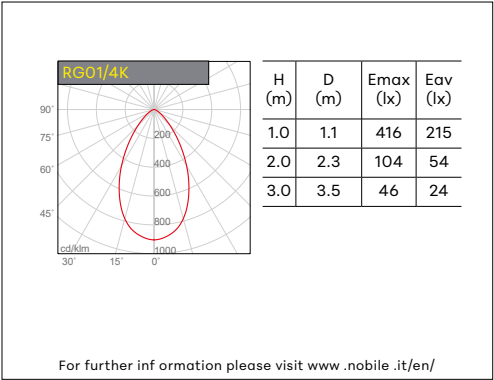

ROUND WITH FRAME

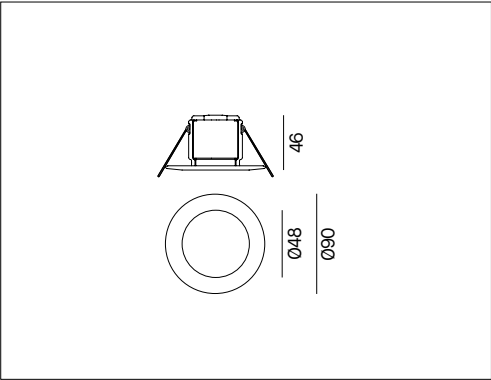

SPECIFICATION TEXT



Round recessed LED luminaire with fixed optics and perimeter surface frame. CRI>80. IP20/IP65. 55° light beam. Frame in white painted aluminium. Body in black plastic material. Power supply integrated. Dimmable TRIAC.

Mounting	Product type	Downlight			
	Installation type	Ceiling			
Dimension	Diameter	90mm			
	Height	46mm			
	Cut-out	68mm			
	Minimum recessed depth	60mm			
Lamp	LED	SAMSUNG 2835			
	LED/W	4.4W			
	Luminous flux nominal	RG01/3K/W	520lm	RG01/4K/W	545lm
	Luminous flux real	RG01/3K/W	440lm	RG01/4K/W	460lm
	Colour temperature CCT	3000K; 4000K			
	Colour rendering index CRI	>80			
	LED Lifetime	50.000 h L70B10 (Ta25°)			
	Photobiological risk	RG1			
Light	Light distribution	Direct			
	Light beam	55°			
Material	Body	Black plastic material			
	Ring	White painted aluminium W=white			
	Lens	Plastic			
Electrical	Driver	TRIAC dimmable 220-240V 50-60Hz included. Compatible with codes: 5862/TRIAC/230V o 5973/DALI/230V to be ordered separately			
Warranty	Warranty	5 years			
Norms	Norm compliance	EN60598-1, EN60598-2-2, EN62471, IEC/TR 62778, EN62493, EN61000-3-3, EN61000-3-2, EN61547, EN55015			

CODE CONFIGURATION

RG01	/	*	*	/	*
		1			2
1	Colour temperature	3K = 3000K; 4K = 4000K.			
2	Colour	W = white.			