




STICK - SK090/1A

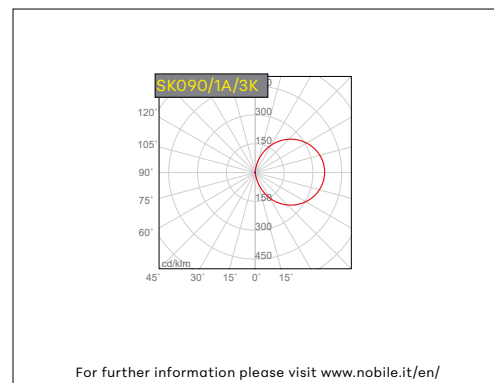

BOLLARD MONO-DIRECTION

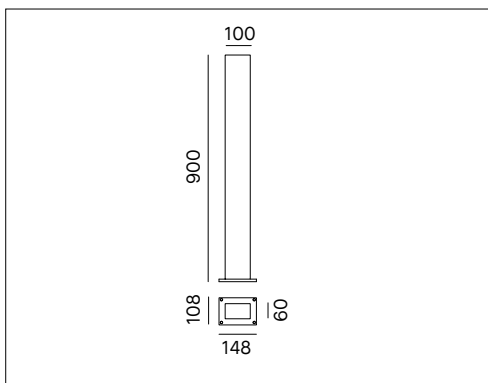

SPECIFICATION TEXT




Outdoor LED bollard for installation on floor or ground. Vertical mono-direction beam. Anchoring system included. Die-cast aluminium body painted white (RAL9003), grey (RAL9006) or anthracite (RAL7016). Satin polycarbonate diffuser. IK08. IP54. Height 900mm. Neoprene H05RN-F 3x0.75mm² cable of 1500mm. 220-240V - 50/60Hz power supply included.

Mounting	Product type	Bollard with vertical mono-direction beam			
	Installation type	Floor, ground			
Dimension	Body	60x100mm			
	Height	900mm			
Lamp	LED	OSRAM			
	System/W	11W			
	Luminous flux nominal	SK090/1A/3K/_	1750lm	SK090/1A/4K/_	1900lm
	Luminous flux real	SK090/1A/3K/_	1540lm	SK090/1A/4K/_	1635lm
	Colour temperature CCT	3000K, 4000K			
	Colour rendering index CRI	>80			
	LED Lifetime	50.000 h			
	MacAdam	3			
	Light	Light distribution	Vertical mono-direction		
Material	Body	Die-cast aluminium			
	Colour	A= anthracite RAL7016 , G= grey RAL9006 , W= white RAL9003			
	Diffuser	Satin polycarbonate			
	Cable	Neoprene H05RN-F 3x0.75mm² 1500mm			
	Anchoring system	Stainless steel, included - KIT/SK030 to be ordered separately			
IK	IK	08			
Electrical	Operating voltage	220-240V 50-60Hz power supply included			
Warranty	Warranty	3 years			
Norms	Norm compliance	EN60598-1, EN60598-2-1, EN62471, IEC/TR 62778, EN61000-3-3, EN61000-3-2, EN61547, EN55015			

CODE CONFIGURATION

SK090	/	1A	/	*	*	/	*
				1			2
1	Colour temperature	3K = 3000K; 4K = 4000K.					
2	Colour	A= anthracite; G= grey; W= white.					

Accessories upon request to be ordered separately

**KIT/SK030**

Anchoring system for inground installation included.